



Swiss perfection for your home

Collection 2015/2016



Collection

Inspirational solutions that make your housework easier.

2015/2016

V-ZUG Ltd

EXPLANATION OF SYMBOLS

Steaming, baking, cooking, microwaves

- | | | |
|-------------------------|------------------------------------|---|
| Hot air | Microwave | PowerRegeneration |
| Hot air humid | AutomaticPlus | PowerSteam |
| Hot air with steaming | CombiCrunch | GourmetGuide |
| PizzaPlus | Top/bottom heat combi mode | Professional baking |
| Top/bottom heat | Hot air combi mode | BakeOmatic |
| Top/bottom heat humid | PizzaPlus combi mode | Soft roasting |
| Top heat | Grill combi mode | Automatic regeneration/automatic reheat |
| Bottom heat | Hot air with steaming combi mode | Recipes |
| Grill | Steam combi mode | My recipes |
| Grill/forced convection | Grill/forced convection combi mode | EasyCook |
| Steam | Top/bottom heat humid combi mode | Favourites |
| Steam 40°C/defrost | Bottom heat combi mode | Fast heating |
| Steam 80°C | Hot air humid combi mode | Switch to summer time |
| Steam 90°C | Regeneration combi mode | Pyrolytic self-cleaning |
| Steam 100°C | Regeneration/reheating | Inverter technology |

Coffee

- | | | |
|--------------------|------------|-----------------|
| Strength of coffee | 2 cups | Latte macchiato |
| Cup size | Hot water | Caffè latte |
| 1 cup | Cappuccino | |

Hobs

- | | | |
|--------------------------------------|-------------------------------|-------------------------------|
| Operating time with cut-off function | Automatic boost | External operation |
| PowerPlus on all cooking zones | Wipe protection | Safety package |
| PowerTronic | Bridging function | Cooking Control |
| Acoustic timer | Perfect for meat | Rice Control |
| Gentle direct selection buttons | Simmer function | Temperature Control |
| Slider control | Perfect for vegetables | Approximate width |
| Pause button | Perfect for fish | Button tone settings (on/off) |
| 9 power levels | Melting function | |
| Keep-warm level | Pan base detection (10-22 cm) | |

EXPLANATION OF SYMBOLS

Ventilation

- Air flow delivery 'n m³/hour
- Number of halogen lights
- Number of halogen spots
- Number of LED lamps
- Gentle controls
- Exhaust air connection: Ø ... mm with integrated non-return flap valve
- Extraction
- Recirculation
- Dimmable light
- Optional remote control
- Remarkably quiet
- Grease filter cleaning indicator

Washing up

- Automatic
- SteamFinish
- Daily Quick
- Daily
- Quick wash/glass care
- Quick wash
- Sprint
- Glass care
- Intensive
- Fondue/raclette
- Hygiene
- Pre-wash
- Eco
- Part load
- Function light
- Energy saving
- Childproof lock
- 24 hour delayed start
- Optimised for tabs
- ergoPlus cutlery drawer

Cooling

- Separate temperature control
- Digital display
- Gentle controls (TouchControl)

General

- After-sales consultancy
- Remarkably quiet
- Languages

Front design

- Black design
- Fully integrated
- Black glass
- TouchClean
- Stainless steel

- Charcoal filter saturation indicator
- Intensive level
- Automatic after-running
- Edge extraction
- Wipe protection

- Limescale sensor
- Turbidity sensor
- Rinse agent dosage
- Water hardness control
- Automatic door opener
- Water consumption: 5 litres
- Interior lighting, number of LED lamps
- Number of standard place settings

- HygienePlus

Washing machines


- Capacity
- Whites/coloureds 20°C-95°C
- Sprint 40°C/60°C
- Woollens 30°C
- Hand wash 20°C
- Cold wash 20°C
- WetClean
- Favourites
- Fabric types
- Anti-mite
- Eco
- Easy iron
- Degree of soiling/Anti-mite
- Extra programmes
- Extra programmes
- Gentle
- Pre-wash
- Steam anti-crease

Tumble dryers

- Capacity
- Extra dry
- Normal dry
- Iron dry for delicate fabrics
- Iron dry
- Damp
- Woollens
- Favourites
- Fabric types
- Crease-guard
- Timed drying/airing
- Delayed start
- Extra gentle
- Door opener
- ReversePlus
- WetClean

- Delayed start
- Temperature setting/energy saving
- Spin speed/stop after rinsing
- AquaPlus
- Turbidity sensor
- Fast forward/End of programme
- Door opener/pause
- Plain text display/languages
- Appliance hygiene

- Crease-guard programme
- Ventilation
- Gentle
- End of programme
- Plain text display/languages
- SilentPlus
- Sprint
- Eco

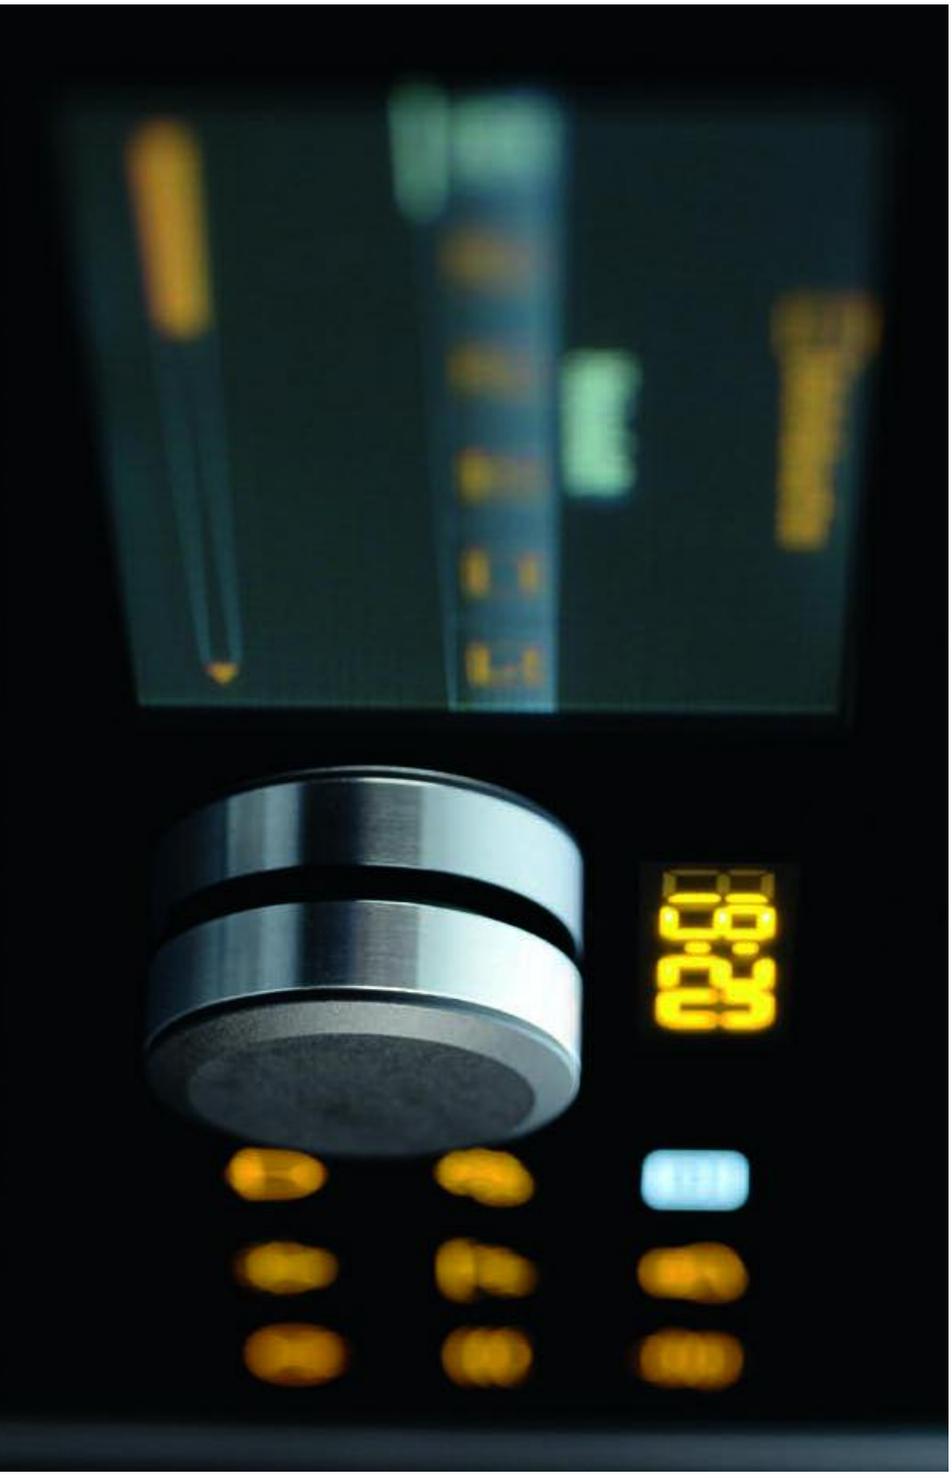

V-ZUG - THE LEADING SWISS HOUSEHOLD APPLIANCE BRAND

For more than 100 years, V-ZUG Ltd has been the Swiss inventor and developer of high-quality, innovative household appliances. V-ZUG makes housekeeping easier with simple and individual solutions that inspire and enthuse.



V-ZUG LTD

- 6 Swiss-made
- 7 Editorial
- 14 World novelties
- 16 Lifestyle by V-ZUG
- 18 Online services
- 20 The new range of appliances

STEAMERS

- 26 Combi-Steamers and Steamers

COFFEE CENTRES

- 58 Coffee Centres

DISHWASHERS

- 92 Adora dishwashers

LAUNDRY

- 118 Adora washing machines
- 130 Adora heat-pump dryers

INFORMATION

- 138 Product declarations

OVENS, DRAWERS

- 42 Ovens
- 52 Warming and System drawers

HOBBS

- 60 Induction hobs
- 74 Toptronic hobs
- 78 Gas hobs

REFRIGERATORS

- 104 Refrigerators
- 116 Wine cooler

MICROWAVES

- 54 Microwaves

DESIGNER HOODS

- 80 Ceiling hoods, island hoods and wall hoods
- 89 Built-in range hoods and hood fans



V-ZUG – SWISS-MADE PREMIUM HOUSEHOLD APPLIANCES SINCE 1913

As constant as the flawless beauty of the Swiss mountains, V-ZUG has been a leading independent Swiss brand since it was founded in 1913. The company is now run by its fifth generation. Since its foundation, it has been developing and producing premium appliances for the kitchen and laundry room with the precision of a Swiss watch. The basic philosophy has not changed. Stylish, individually tailored solutions which make housekeeping easier. Our past is the basis for the future: household appliances from V-ZUG have no expiration date – we design and manufacture them to last a lifetime.



Workers at the shipping unit, 1913



Dear Customers

Top quality, high functionality and irresistible elegance in the manufacturing of products, matched by our excellent service, are part not only of our 100-year tradition but also of the commitment that we demonstrate on a daily basis. Our aspiration is to be regarded as the "leader in kitchen and laundry appliances". That is why we continually come up with increasingly economical and user-friendly products – revolutionary V-ZUG innovations that repeatedly set new standards worldwide.

V-ZUG is an internationally recognised premium brand. As the long-standing Swiss market leader, we have already earned the trust of millions of customers. We are especially proud of the enthusiastic response we have received from top chefs, who also recommend our products.

We promise you that our V-ZUG household products will not only win you over, but also delight you.

Dirk Hoffmann
CEO of V-ZUG Ltd



THE ONLY MANUFACTURER WHICH DEVELOPS AND PRODUCES A COMPREHENSIVE RANGE IN SWITZERLAND

With nearly 62,000 square metres at the Zug workshop and another site in Arbon on Lake Constance, more than 1400 employees use their knowledge and skills to serve our demanding clientele in Switzerland and around the world. V-ZUG Ltd is the only manufacturer to develop and produce a comprehensive range of appliances in Switzerland.

A committed Swiss company with real vision

V-ZUG Ltd believes in Switzerland as an economic centre and invests in a modern infrastructure in Zug every year. For V-ZUG, part of its commitment as a company involves creating and preserving jobs. Continuous training and professional development are also very close to our hearts. This, too, is an investment into the future.

COMMITTED TO YOU SINCE 1913 – WITH INNOVATION AND SWISS QUALITY

We not only have a tradition of premium Swiss quality, we also have a commitment to progress. V-ZUG Ltd's inventions and innovations set new global standards in the fields of health, hygiene and resource preservation and in terms of the simplification and individualisation of housekeeping. Quality is key in all areas at V-ZUG, from the selection of materials through functional aesthetics to advice and service.

In Zug, in the heart of Switzerland, V-ZUG Ltd develops, produces and distributes high-precision household appliances for the kitchen and laundry room using manufacturing systems in the vanguard of modern technology. Over 4.5 million devices are in use in Switzerland, improving quality of life when it comes to cooking, roasting, baking, washing-up, washing and drying.



Where once milk churns were galvanised, more than 1400 people from 24 countries – including over 60 trainees in 9 different trades – work at the Zug site today, producing household appliances of the highest quality.



V-ZUG IS ALSO ONE STEP AHEAD WHEN IT COMES TO ENVIRONMENTAL PROTECTION

As a company which aims to offer its customers the very best in every way, we understand that innovation and quality also go hand in hand with protecting the environment. Our awareness of our responsibility and our technological expertise make us the pioneers in the industry when it comes to ecology. This is confirmed not only by our resource-friendly production systems and our energy-saving appliances, but also by the ISO 14001 certification and our state-of-the-art ZUGgate logistics centre, which is self-sufficient in terms of energy thanks to the largest private photovoltaic system in the canton of Zug.



Our state-of-the-art ZUGgate logistics centre has the largest private photovoltaic system in the canton of Zug, making it self-sufficient in terms of energy.

UNIQUE WORLDWIDE – TWO REPRESENTATIVE AREAS OF V-ZUG EXPERTISE



Expertise in steam technology

Since as far back as 2001, V-ZUG has marketed integrated steamer and Combi-Steamer appliances for private households. And it has been enormously successful. Our expertise in steam technology has constantly been developed and the company's leading market position further consolidated.

With the launch of the Combi-Steam MSLQ in 2015, the first appliance in the world to combine conventional, steam and microwave heating, the consumer is given virtually unlimited possibilities. Cooking has never been so quick and gentle. The innovation leadership of V-ZUG has once again been impressively confirmed.

However, it is not only in the area of cooking that V-ZUG has demonstrated its leading expertise in steam technology. Since 2004, steam has also been used to treat the laundry in our washing machines (world-exclusive Steam anti-crease), which makes ironing all but unnecessary. And then there is the innovative appliance hygiene programme which cleans extremely thoroughly: hot steam ensures hygienic cleanliness in the entire washing machine.

Equipped with the world-exclusive SteamFinish, which was introduced in 2012, the Adora dishwasher cleans glasses, cutlery and plates with pure steam, ensuring measurable, spot-free cleanliness and sparkling shine.

In the new fabric care system, REFRESH-BUTLER, steam is also an important component of the Anti-Crease, refresh and sanitise programmes in combination with the world-exclusive photocatalysis.

Expertise in conserving resources

In 2001, V-ZUG was the first supplier in the world to offer a laundry dryer incorporating innovative heat-pump technology, and today is still setting new standards in the sparing use of resources in this and other appliance segments.

V-ZUG remains the first and only supplier to also offer washing machines and dishwashers with heat-pump technology. It enables impressive energy savings of roughly 50% compared with conventional technology.

The REFRESH-BUTLER fabric care system is also equipped with state-of-the-art heat-pump technology and features not only very low energy consumption but also impressive care programmes.

Thanks to our sense of responsibility and our technological expertise, we are the trailblazers in the field of ecology in our industry.



Most innovative brand in the household appliance sector in 2014

In 2014, V-ZUG wins the prestigious Plus X Award, the innovation price for technology, sport and lifestyle products. The independent international jury recognises V-ZUG as the world's most innovative supplier in the household appliance sector.



SIMPLICITY IS THE RESULT OF CAREFUL CONSIDERATIONS

V-ZUG appliances make life simpler and are the expression of a personal lifestyle. This is easy to say, but is the result of a creative, critical and uncompromising process to which V-ZUG is committed: innovation. With Swiss engineering and a sure feeling for trends, our developers are able to anticipate requirements and perfect existing appliances – with a real focus on simplicity, sustainability and individuality. The result: innovations for the whole world which are now part of everyday life in Swiss households.

V-ZUG INNOVATIONS SET NEW STANDARDS – WORLDWIDE

2001: Fondue/raclette programme

The Fondue/raclette programme allows you to get all your fondue and raclette equipment and oven dishes clean without pre-soaking.

2004: Steam anti-crease

The Steam Anti-Crease programme makes ironing all but unnecessary.

2004: Anti-mite

The anti-mite programme lets allergy sufferers breathe easier.

2005: V-ZUG-Home

Household appliances which are networked using V-ZUG-Home are perfect for use in networked houses.

2007: GourmetSteam

The GourmetSteam programme helps you prepare star chef recipes at the touch of a button.

2007: MinairComfo

The MinairComfo is the first and only range hood to be connected to a comfort ventilation system.

2008: Vibration Absorbing System

The Vibration Absorbing System (VAS) featured in the Adora and Unimatic washing machines minimises noise and makes them particularly suitable for installation at above ground floor level.

2009: BakeOmatic

The BakeOmatic programme adjusts the baking climate, the temperature and the timing completely automatically depending on the food placed in the cooking space.

2012: Easy cooking

The induction hob with a fully automated rice cooking function.

2013: REFRESH-BUTLER

A revolution in fabric care: gently refreshes clothing with world-exclusive photocatalysis to remove creases from wear.

2013: washing machine with heat-pump technology

The world's first washing machine with a heat pump sets new standards in terms of energy efficiency. Electricity consumption is reduced by around 55 %.

2014: dishwasher with heat-pump technology

The world's first dishwasher with a heat pump reduces electricity consumption by nearly 40% compared to conventional dishwashers.

2015: Combi-Steam MSLQ with unlimited options

The Combi-Steam MSLQ is the world's first appliance to combine three heating methods in one: conventional, steam and microwave. Cooking has never been so quick and gentle.



LIFESTYLE BY V-ZUG – “SALT AND PEPPER” FOR YOUR CUISINE

Our kitchen aids are really designed for private households. However, top professional chefs also rely on the quality and options offered by V-ZUG appliances – in both restaurants and the catering industry. If anybody is going to put our kitchen appliances to the test, it is them.

These professional chefs are sharing their expertise and their exemplary taste with the customers of V-ZUG Ltd: the Lifestyle by V-ZUG online portal is all about stylish cuisine and culinary delicacies. Have a look behind the scenes at the best restaurants in Switzerland, get to know top-flight cuisine a little better and discover exclusive recipes which are guaranteed to succeed using V-ZUG appliances. Lifestyle by V-ZUG is the inspiration, the perfect seasoning for your everyday cooking.

vzug.com/lifestyle



Andreas Caminada

Schloss Schauenstein, Fürstenu, youngest chef of all time to be awarded 19 GaultMillau points, 3 Michelin stars, was named GaultMillau Chef of the Year twice



Tanja Grandits

Restaurant Stucki, Basel, 18 GaultMillau points, 2 Michelin stars, Chef of the Year 2006, Most Improved Chef of the Year 2010, Chef of the Year 2014



Benoît Violier

Hôtel de Ville, Crissier, Meilleur Ouvrier (best craftsman) 2000 in France, 19 GaultMillau points, 3 Michelin stars, Chef of the Year 2013




Nenad Mlinarevic

Restaurant focus, Park Hotel Vitznau, 17 GaultMillau points, 2 Michelin stars, Discovery of the Year 2011



Stefan Meier

Gasthaus Rathauskeller, Zug, 15 GaultMillau points, author of various recipe books and publications

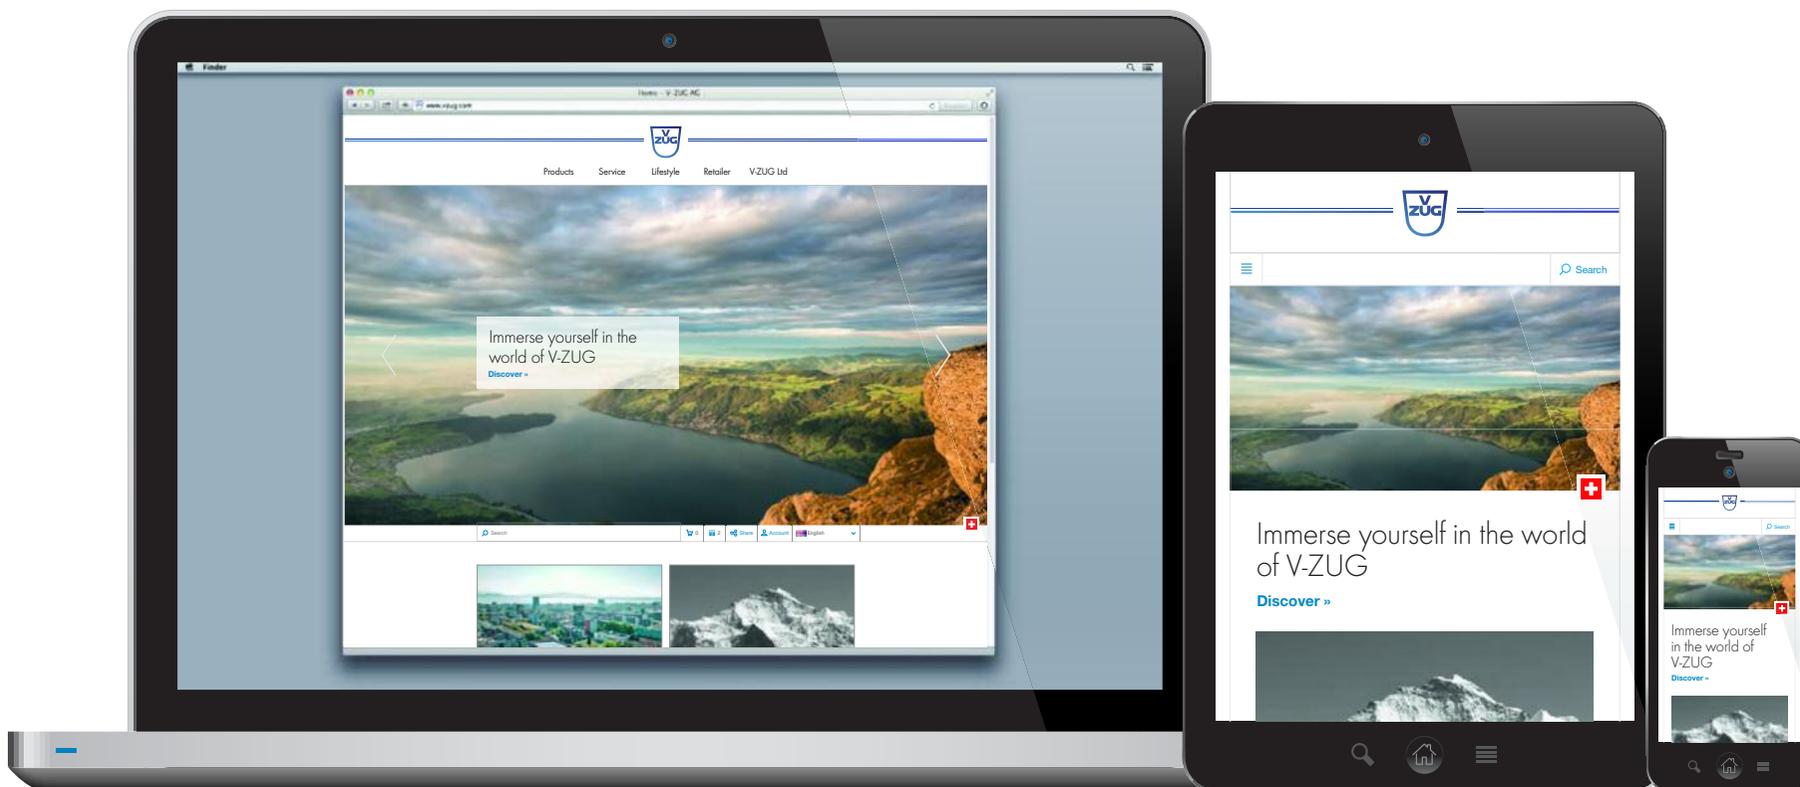

V-ZUG ALWAYS AT HAND - WELCOME TO OUR ONLINE WORLD

Use our website vzug.com as a source of inspiration or reference, or to contact us. Our online world contains all the information and technical specifications for your appliances, as well as all sorts of exciting new recipes and online cookery tips. The whole world of V-ZUG always at hand - around the clock, around the world.



THE NEW RANGE OF
APPLIANCES FROM V-ZUG
INSPIRES AND ENTHUSES WITH
PERFECT DESIGN

DESIGN IS AESTHETICS AND FUNCTION

The simple, clear lines and the focus on what is essential give the new generation of ovens, steamers, microwaves and Coffee Centres real elegance. They blend in perfectly in any kitchen.



Combi-Steam MSLQ



Combaair XSL



Combi-Steam HSL

Standard size

The dimensions of ovens and steamers are 60 x 60 cm. Appliances in standard size can be used as stand-alone devices or as add-on units for compact or mini ovens.

Compact class – 45 cm range

The popular appliances with a height of 45 cm and a width of 60 cm have all the important functionality and can be combined in a variety of ways. Available in this size are ovens, ovens with pyrolytic cleaning, Combi-Steamers, Coffee Centres and microwave ovens.

Small appliances – 38 cm range

The small appliances in this range are 38 cm high and 60 cm wide, making them an ideal add-on to a standard oven. The Combi-Steam HSL, Steam HSE, Combaair HSE oven, Coffee Centres and microwave ovens are available in this size.

NEW: APPLIANCES WITH RETRACTABLE HANDLE

This range from V-ZUG incorporates a real design highlight for all those who want things a touch simpler and more elegant.

When the appliance is switched off, the handle is not visible. Only when the appliance is turned on does the handle move into position, as if by magic. The appliance can then be opened and closed as normal. As soon as the appliance switches off, the handle moves back to its original retracted position until it is next needed.



CONVENIENT OPERATION



Quick and direct to operate with adjusting knob

The new generation of premium-design V-ZUG appliances can be controlled quickly and precisely using an adjusting knob. The new practical full-colour graphic display shows all the settings at a glance. To the right of the adjusting knob are all the important basic operating modes which can be selected directly using sensor buttons.



Full-colour graphic display (with or without touch screen)

The top comfort models all feature the new TFT graphic display with background images in colour. The SLQ range even has direct touch-screen controls which take you where you need to go with a simple "Press and go".




Graphic display

The LCD shows text and symbols to indicate the settings you selected using the adjusting knob and keeps you up to date in your language of choice.



Sensor buttons

The new design fulfils even the most exacting demands. To the right of the central adjusting knob are all the important settings which can be selected directly. Just the touch of a button takes you to the various areas for individual selection of operating modes, to GourmetGuide and to EasyCook, or simply to a function such as the water-tank ejection system in the Combi-Steamers.

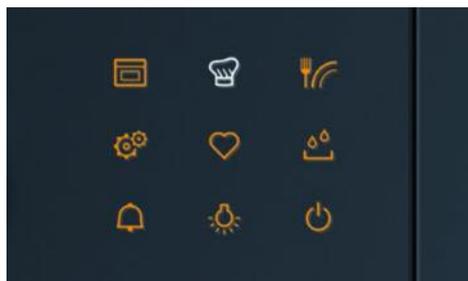

Favourites

You have the option of saving up to 24 favourites alongside the recipes which are already saved. For example, you can save your favourite recipes from grandmother's recipe book or other recipes you often use on the device and give them a name. These are then available to use or amend at any time at the touch of a button.



INDIVIDUAL BUTTON CONTROLS

The new V-ZUG user guide offers individual solutions to help you choose the right settings quickly and easily. Whether you are a top chef or a home cook: you will find the setting you want quickly and reliably thanks to the direct access.

Operating modes – the perfect settings for personalised cooking

V-ZUG provides the perfect operating mode for every requirement. And if you are in a hurry, the fast heating function can be selected too in some operating modes.


GourmetGuide – simple preparation thanks to automatic programmes

A range of intelligent programmes with unique settings such as GourmetSteam, automatic soft roasting (patented), BakeOmatic and professional baking allows you to achieve perfect results, with success guaranteed.

EasyCook – tips on settings with suggestions for the right operating mode

With over 100 helpful factory settings for individual foods, you can achieve optimum results at the touch of a button.

Combi-Steamers and Steamers

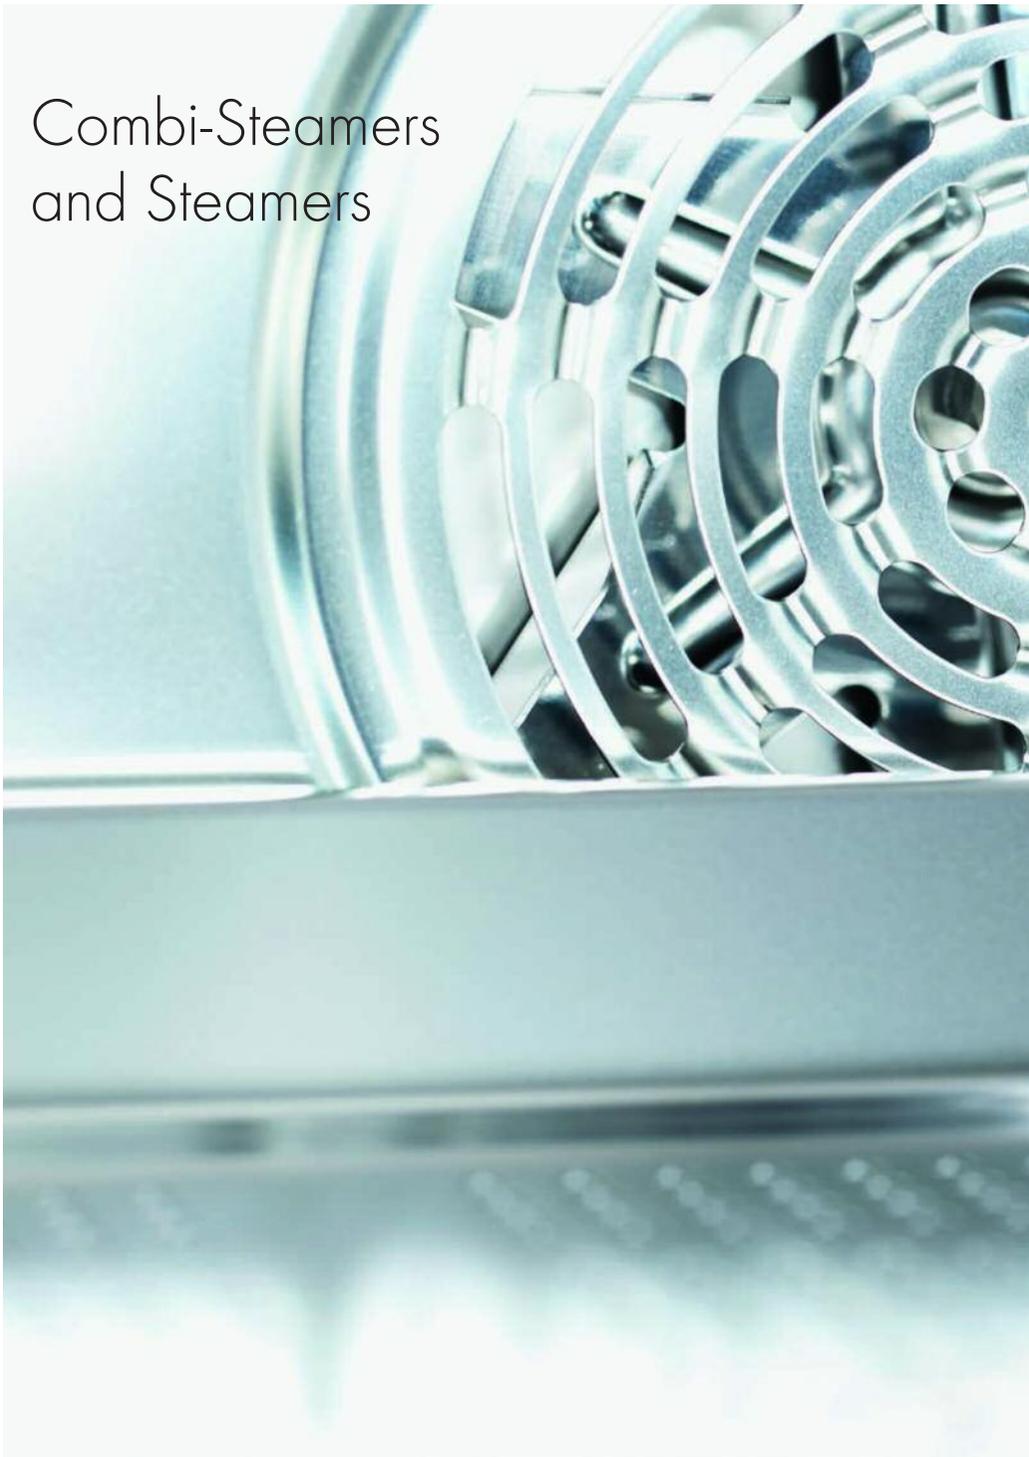

Do you sometimes wish you could switch on turbo mode when you are cooking and baking? This is possible for the first time with the **Combi-Steam MSLQ** from V-ZUG. It combines conventional heat and steam with a PowerPlus function (microwave). And this can do much more than heat food: like a booster, it accelerates all cooking

processes by around one-third. The three heating modes can be combined any way you wish. For example, steam makes a loaf of bread light and crusty, conventional heat gives it the golden brown colour, and the microwave means it is ready much quicker. Perfect for healthy eating!

EXCLUSIVE VACUISINE® BY V-ZUG – GOURMET CUISINE BELOW 100°C FOR CULINARY DELIGHTS AT HOME

Vacuum cooking (also known as sous-vide) is the process of cooking food in vacuum-sealed bags. This technique is employed in the world's best restaurants as it creates a unique combination of flavours, textures, freshness and appearance.



The Combi-Steam is ideal for cooking in vacuum bags.

vzug.com

Detailed information about Vacuisine and an array of recipes from top-flight chefs can be found at vzug.com/lifestyle



Haute Goûture,
the exclusive magazine about Vacuisine.



GOURMETSTEAM: GOURMET MEALS AT THE TOUCH OF A BUTTON

Recipes from top chefs are already programmed into the Combi-Steam MSLQ, XSL, HSL and Combi-Steam SL. Simply select one, press the relevant button, and your appliance becomes a maître de cuisine. This guarantees success for even the most ambitious recipes.

THE NEW RECIPE BOOKS

Whether you are cooking something for a weekday evening, conjuring up gourmet meals for your guests or baking fragrant cakes for celebratory occasions, the new recipe books will help you to create delicious dishes quickly and with very little effort.



Fast steaming
This recipe book contains 65 refreshing recipes for the Combi-Steam MSLQ.



Magical steaming
This book comprises 83 charming recipes for flavoursome food and comes with all SL models. It is also available for activation on SE models.



Baking treats
A total of 39 delicious recipes for every occasion await you, collected in a beautiful book. The recipes are available for activation on CSSE, CSSL and CSTMSLQ models.

Note: the English version of the basic recipe book is already included with the SL range of appliances. This recipe book is available in 11 languages at www.vzug.com/books

COMBI-STEAMERS: FOR A WORLD OF FLAVOURS

	GOURMET CUISINE below 100°C	GOURMET CUISINE above 100°C	BEAUTIFULLY TENDER MEAT	
	 Vacuine	 GourmetSteam	 Soft roasting seared meat	 Soft roasting with steam
Benefits	Vacuum cooking A unique combination of flavours, quality, freshness and appearance. You can now use the sophisticated cooking technique used by the world's best chefs simply at home with the Combi-Steam, and with the help of the expertise and experience of the top chefs, who also give tips and tricks.	Exclusive meals Cook like a top chef at home. The GourmetSteam programme gives you access to numerous exclusive gourmet meals which are guaranteed to succeed.	Tender meat The meat is ready to serve exactly when you want, regardless of the shape, thickness or quantity.	Tender meat A perfectly roasted cut of meat, ready to serve exactly when you want, regardless of the shape, thickness or quantity.
Function	Vacuum cooking is the slow cooking of food in vacuum-sealed bags at low, precisely controlled temperatures in the Combi-Steam.	The Combi-Steam gives access to a database of gourmet recipes from top chefs.	This patented innovation monitors the internal temperature of the meat using a probe and automatically adjusts the cooking temperature accordingly during the cooking time of 2.5 to 4.5 hours.	This patented innovation monitors the internal temperature of the meat using a probe and automatically adjusts the steamer temperature accordingly during the cooking time of 1.5 to 2.5 hours.
Use	The extremely precise temperature setting is perfect for cooking at below 100°C.	Gourmet meals can be accessed at the touch of a button. All the recipes are collected in a recipe book. An extended recipe book is available separately.	After it has been seared, the meat is constantly monitored in the steamer while it is slowly cooked.	A perfectly roasted cut of meat is constantly monitored in the steamer while it is slowly steam-cooked before being seared.

BAKING	QUICK AND FRESH		EVERYDAY COOKING
 Professional baking	 Regeneration	 Automatic regeneration	 BakeOmatic
Baked goods Perfect for baked goods with yeast and puff pastry. Bread and rolls rise beautifully and have a tasty-looking shiny crust. They are light on the inside and crusty on the outside and stay fresh longer. Having your own bakery is this easy.	Convenience and regeneration Ideal for families eating at different times or for heating up.	Regeneration For the first time, meals can be reheated and prepared completely automatically, with the result that they are just as crispy as if they had been freshly prepared.	Cooking without a recipe The BakeOmatic always produces excellent results quickly, simply and reliably.
The professional baking mode is a combination of steam and hot air for four applications: <ul style="list-style-type: none">▪ Bread▪ Plaited bread▪ Puff pastry▪ Proofing yeast dough	The programme for prepared meals and convenience food.	The automatic programme for prepared meals and convenience products, especially baked goods (flans, quiches, pizza, aperitif nibbles, etc.)	The programme for spontaneous cooking without a recipe. The steamer automatically detects the size and quantity of the food.
The professional baking mode can easily be selected at the touch of a button. The steam and hot air periods are controlled automatically.	Several dishes can be warmed at the same time without losing quality or moisture.	Several dishes can be warmed at the same time without losing quality or moisture.	Very convenient: no manual entry of times, temperatures, operating modes or quantities is required.

WORLD-EXCLUSIVE COMBI-STEAM MSLQ – HEALTHY STEAMING, NOW EVEN QUICKER

V-ZUG is the first manufacturer to successfully combine three heating methods – conventional, steam and microwave – in a single appliance: the new Combi-Steam MSLQ.

The unique combination of all heating methods

Brilliant cooking has never been so quick: with three practical functions in one appliance, gentle cooking of gourmet and precooked meals is now easier than ever.



Operating mode/function

Operating mode/function	Benefits
1 Steam Gentle, no-pressure steaming of vegetables	Very gentle steaming of different foods, even when they are placed on different levels. For preparing all kinds of vegetables, swelling rice and grains or poaching ham, smoked pork loin or sausages.
2 Conventional heat For example, top/bottom heat, hot air or grill	The traditional operating mode for baking cakes or bread or cooking roasts and drying.
3 Microwave Heating or reheating liquids	Traditional heating of food or quick, simple heating of liquids in a container. Slow, gentle defrosting is also possible thanks to inverter technology.
4 Combination steam/microwave For example, PowerSteam	The food is cooked not only with steam, but also using microwaves to reduce cooking times by around one-third.
5 Combination steam/conventional For example, hot air with steaming	The ideal setting for puff and yeast pastry. The dough rises beautifully with a shiny, crispy crust. Also very suitable for the low-fat cooking of frozen foods, such as oven chips or spring rolls.
6 Combination conventional/microwave For example, top/bottom heat and PowerPlus	Combining any operating mode with microwave mode reduces the cooking time by approximately 30% to 75% compared to conventional cooking.
7 World-exclusive: combination of all heating methods For example, PowerRegeneration or Hot air and steaming with PowerPlus	This exclusive combination adds a new dimension to cooking. You save a great deal of time: all types of baking and steaming are around 30% quicker; for example, when using PowerRegeneration or hot air and steaming with PowerPlus.

THE EXCLUSIVE POWER FUNCTIONS ON THE NEW COMBI-STEAM MSLQ

PowerSteam
V-ZUG has known all about gentle cooking with steam for many years. Now, the new Combi-Steam MSLQ with its innovative PowerSteam mode allows vegetables, for example, to be cooked around 30% faster than before and just as gently as ever.

PowerRegeneration
Heating with steam and hot air is the perfect combination for reheating precooked dishes so they taste like they have been freshly prepared. With the new PowerRegeneration mode, this process is accelerated but still as gentle as before.

PowerPlus
With the help of PowerPlus, any operating mode can be combined with microwave mode to produce a power mode. All you need to do is select a suitable PowerPlus level to start – and the quick, gentle, controlled cooking experience can begin. Depending on the setting, PowerPlus can reduce cooking times by approximately 30% to 75% compared to conventional cooking.

Recipe	Cooking time, conventional (approx.)	Cooking time, combi mode (approx.)	Time saved (approx.)
Quick cake	40 min.	10 min.	75%
Quick lasagne	40 min.	25 min.	37%

Source: V-ZUG Ltd

Statement of the Weihenstephan-Triesdorf University of Applied Sciences:

“The Combi-Steam MSLQ allows quick and gentle cooking with PowerSteam and fast reheating with PowerRegeneration. PowerSteam reduces cooking times for selected vegetables by around 25% to 30% compared to cooking with steam. This allows 30% better preservation of minerals and vitamin C than conventional cooking.”

HOCHSCHULE
WEIHENSTEPHAN-TRIESDORF
UNIVERSITY OF APPLIED SCIENCES





COMBI-STEAMERS – IMPRESSIVE FUNCTIONS

The Combi-Steamers from V-ZUG make cooking easier. The range of intelligent programmes allows quick, simple preparation of all sorts of dishes and meals and provides inspiration for new recipe ideas.

GourmetGuide – simple preparation thanks to automatic programmes

A range of intelligent programmes with unique settings such as GourmetSteam, automatic soft roasting (patented), BakeOmatic and professional baking allows you to achieve perfect results.

EasyCook – tips on settings with suggestions for the right operating mode

With over 100 helpful factory settings for individual foods, you can achieve optimum results at the touch of a button.

Steam – retain natural flavours and promote well-being

Gentle steaming in V-ZUG Combi-Steamers retains the valuable vitamins and minerals and preserves the taste. So not only are you doing your health a favour, it tastes great too.

Regeneration – reheated, but tastes freshly prepared

With a special combination of steam and hot air, you can reheat prepared meals and convenience food without losing quality or moisture and enjoy them as if they were freshly prepared. You can even regenerate multiple dishes at once. The Combi-Steam also has an automatic regeneration function for completely automatic reheating of crispy foods.

Patented Soft roasting – beautifully tender meat exactly when you want it

Soft roasting seared meat

The sophisticated innovation of soft roasting for seared meat automatically monitors the internal temperature of the meat with a food probe and adjusts the steamer temperature accordingly. The perfectly roasted cut of meat is ready to serve exactly when you want, regardless of the shape, thickness or quantity.

Soft roasting with steam


Perfect for top-quality meat. The result: much faster and saving up to 25% more energy compared to conventional soft roasting.

Professional baking – as fresh and crispy as from the baker's

The professional baking mode is a combination of steam and hot air. It is perfect for all yeast doughs: it makes puff pastry light and fluffy, and bread and rolls rise beautifully with a tasty-looking shiny crust. They also stay fresh longer.

BakeOmatic – delicious meals, prepared fully automatically

With BakeOmatic, there is no need to enter the cooking time, temperature, operating mode or quantity manually. The unique sensor technology in the Climate Control System (CCS) allows the Combi-Steam to detect the quantity and size of the meal automatically and thus select the best sequence of different operating modes with the precise temperatures and cooking times required. And you know exactly when it will be ready.

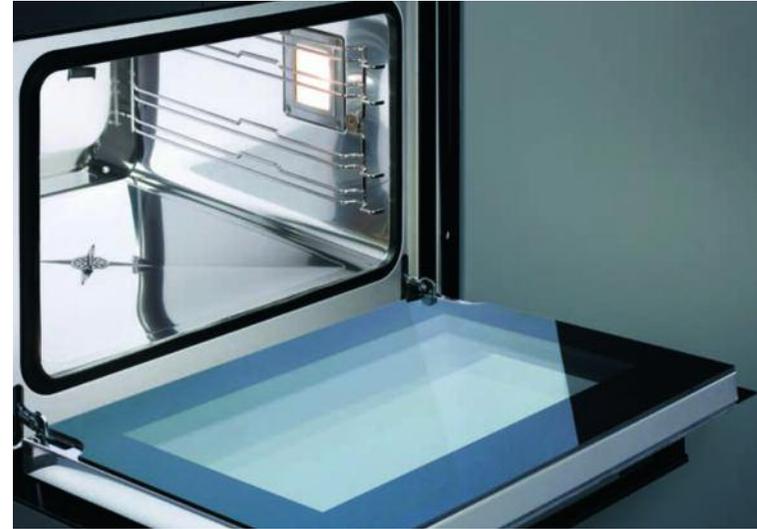

EVEN MORE CONVENIENCE WITH A FIXED WATER CONNECTION

Our Combi-Steam model with fixed water connection makes steaming even easier and produces perfect results. Thanks to the plumbed-in water inlet and outlet, you have fresh water for steam mode whenever you need it. The built-in water tank is then only used for automatic cleaning (descaling). An additional drip tray is no longer required for steaming, as the remaining water simply flows away via the outlet.

Steam reduction function

Pressing this button down briefly during cooking triggers a quick manual steam reduction – in order to put more food into the cooking space, for example. When cooking is complete, this function is activated automatically, and you can then remove the cooked food from the Combi-Steamer.

Advantages of a fixed water connection

- Easier to use, with no need to top up the water tank
- Easier cleaning of the bottom of the cooking space
- Clear view of the cooking space within a few seconds thanks to the steam reduction function

PRODUCT COMPARISON: COMBI-STEAMERS AND STEAMERS

	Combi-Steam MSLQ	Combi-Steam XSL	Combi-Steam XSL, fixed water connection	Combi-Steam HSL	Steam HSE	Combi-Steam SL	Combi-Steam SE
Brochure page	37	38	38	39	39	40	40
Versions							
Stainless steel	✓	✓	✓	✓	✓	✓	✓
Black glass	✓	✓	✓	✓	✓	✓	✓
Black glass with retractable handle	–	✓*	✓*	–	–	✓*	–
Illumination/automatically with door	Halogen / ✓	Halogen / ✓	Halogen / ✓	Halogen / ✓	–	Halogen / ✓	Halogen / ✓
Cooking space volume	55	51	51	34	36	55	55
Appliance height cm	60	45	45	38	38	60	60
Energy efficiency class	A	A+	A+	A+	–	A+	A+
Unique V-ZUG innovations							
Vacuine, precisely controlled temperatures	✓	✓	✓	✓	✓	✓	✓
GourmetSteam	✓	✓	✓	✓	–	✓	–
BakeOmatic with Climate Control System (CCS)	✓	✓	✓	✓	–	✓	–
Soft roasting seared meat/with steam	✓/✓	✓/✓	✓/✓	✓/✓	–	✓/✓	–
Automatic regeneration	✓	✓	✓	✓	–	✓	–
Regeneration	✓	✓	✓	✓	–	✓	✓
PowerRegeneration	✓	–	–	–	–	–	–
Professional baking	✓	✓	✓	✓	–	✓	✓
Food probe	✓	✓	✓	✓	–	✓	–
Electronic Steam System (ESS)	✓	✓	✓	✓	✓	✓	✓
Obstacle-free cooking space	✓	✓	–	✓	✓	✓	✓
Integrated recipes	✓	✓	✓	✓	–	✓	–
Uses							
Steam	✓	✓	✓	✓	✓	✓	✓
PowerSteam	✓	–	–	–	–	–	–
Top/bottom heat	✓	–	–	–	–	✓	✓
Hot air	✓	✓	✓	✓	–	✓	✓
Hot air with steaming	✓	✓	✓	✓	–	✓	✓
PizzaPlus	✓	–	–	–	–	✓	✓
Hot air humid	✓	✓	✓	✓	–	✓	✓
Grill	✓	–	–	–	–	✓	✓
Operation and display							
Fully electronic operation	✓	✓	✓	✓	✓	✓	✓
Sensor buttons	✓	–	–	✓	✓	✓	✓
Full-colour graphic display/touch screen	✓/✓	✓/–	✓/–	–	–	✓/–	–
Graphic display	–	–	–	✓	✓	–	✓
Steam reduction function	–	–	✓	–	–	–	–
Descaling programme	✓	✓	✓	✓	✓	✓	✓
Stainless-steel cooking space	–	✓	✓	✓	✓	–	–
Double-enamel cooking space	✓	–	–	–	–	✓	✓

* Optional.



Combi-Steam MSLQ 60 CST MSLQ 60

Black glass CSTMSLQZ60/23015
Stainless steel CSTMSLQZ60c/23015

Front design



- Mirrored quadruple glass door
- Designer handle
- Appliance dimensions (H x W x D):
598 x 596 x 569 mm

Operating modes and features



- Cooking space: 55 l, double enamel
- Water tank with ejection system; volume: 0.9 l
- Illumination: 2 halogen lamps
- Climate sensor
- Automatic height compensation
- Energy-saving ventilation
- Post-ventilation as required
- External boiler
- 700 W microwave power level with inverter technology
- 1 wire shelf
- 1 double-enamel baking tray
- 1 perforated plastic cooking tray, 1/3 GN*
- 1 unperforated stainless-steel tray
- 1 hardened glass dish
- 1 food probe
- 1 "Fast steaming" recipe book

Operation and display

- Sensor buttons and adjusting knob
- Full-colour touch-screen graphic display
- Loudspeaker with acoustic signals
- Time, saved up to 12 hrs
- Programme duration/end
- Temperature suggestion
- Cooking space temperature
- Internal food temperature
- Descaling programme

Combi-Steam MSLQ 60

Options

- "Baking treats" recipe book

Accessories



Perforated plastic cooking tray, 1/3 GN*
325 x 177 x 52 mm (W x D x H)



Hardened glass dish
380 x 451 x 25 mm (W x D x H)

For further accessories, see page 41

* GN = Gastronorm.



Combi-Steam XSL 60 CST XSL 60
Black glass CSTXSLZ60/23005
Stainless steel CSTXSLZ60c/23005

Front design



- Mirrored triple glass door
- Designer handle
- Appliance dimensions (H × W × D):
454 × 596 × 568 mm

Operating modes and features



- Cooking space: 51 l, stainless steel
- Water tank with ejection system;
volume: 0.9 l
- Illumination: 1 halogen lamp
- Climate sensor
- Automatic height compensation
- Energy-saving ventilation
- Post-ventilation as required
- External boiler
- 1 wire shelf
- 1 TopClean baking tray
- 1 stainless-steel tray, perforated and
unperforated
- 1 food probe
- 1 "Magical steaming" recipe book

Operation and display

- Sensor buttons and adjusting knob
- Full-colour graphic display
- Loudspeaker with acoustic signals
- Time, saved up to 12 hrs
- Programme duration/end
- Temperature suggestion
- Cooking space temperature
- Internal food temperature
- Descaling programme



Combi-Steam XSL 60 CST XSL 60 F
Black glass CSTXSLZ60F/23007
Stainless steel CSTXSLZ60Fc/23007

Front design



- Mirrored triple glass door
- Designer handle
- Appliance dimensions (H × W × D):
454 × 596 × 568 mm

Operating modes and features



- Cooking space: 51 l, stainless steel
- Fixed water connection for water inlet
and outlet
- Illumination: 1 halogen lamp
- Climate sensor
- Automatic height compensation
- Energy-saving ventilation
- Post-ventilation as required
- External boiler
- 1 wire shelf
- 1 TopClean baking tray
- 1 unperforated stainless-steel tray
- 1 food probe
- 1 "Magical steaming" recipe book

Operation and display

- Sensor buttons and adjusting knob
- Full-colour graphic display
- Loudspeaker with acoustic signals
- Time, saved up to 12 hrs
- Programme duration/end
- Temperature suggestion
- Cooking space temperature
- Internal food temperature
- Descaling programme

Combi-Steam XSL 60

Options



- Retractable handle

- Fully extending runner

For accessories, see page 41



Combi-Steam HSL 60 CST HSL 60
Black glass CSTHSLZ60/23004
Stainless steel CSTHSLZ60c/23004

Front design



- Mirrored triple glass door
- Designer handle
- Appliance dimensions (H × W × D):
379 × 596 × 568 mm

Operating modes and features



- Cooking space: 34 l, stainless steel
- Water tank: 1.25 l
- Illumination: 1 halogen lamp
- Climate sensor
- Automatic height compensation
- Energy-saving ventilation
- Post-ventilation as required
- External boiler
- 2 wire shelves, 2/3 GN*
- 1 perforated cooking tray, 2/3 GN*
- 1 unperforated stainless-steel tray, 2/3 GN*
- 1 food probe
- 1 "Magical steaming" recipe book

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Loudspeaker with acoustic signals
- Time, saved up to 12 hrs
- Programme duration/end
- Temperature suggestion
- Cooking space temperature
- Internal food temperature
- Descaling programme



Steam HSE 60 ST HSE 60
Black glass STHSEZ60/23002
Stainless steel STHSEZ60c/23002

Front design



- Mirrored double glass door
- Designer handle
- Appliance dimensions (H × W × D):
379 × 596 × 568 mm

Operating modes and features



- Cooking space: 36 l, stainless steel
- Water tank: 1.25 l
- Climate sensor
- Automatic height compensation
- Post-ventilation as required
- External boiler
- 1 perforated cooking tray, 2/3 GN*
- 1 unperforated stainless-steel tray, 2/3 GN*

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Acoustic signal
- Time, saved up to 12 hrs
- Programme duration/end
- Temperature suggestion
- Descaling programme

Combi-Steam HSL 60

Options

- Fully extending runner

Steam HSE 60

Options

- Fully extending runner

For accessories, see page 41

* GN = Gastronorm.



Combi-Steam SL 60 CS SL 60
Black glass CSSLZ60/23012
Stainless steel CSSLZ60c/23012

Front design



- Mirrored triple glass door
- Designer handle
- Appliance dimensions (H x W x D):
598 x 596 x 569 mm

Operating modes and features



- Cooking space: 55 l, double enamel
- Water tank with ejection system;
volume: 0.9 l
- Illumination: 2 halogen lamps
- Climate sensor
- Automatic height compensation
- Energy-saving ventilation
- Post-ventilation as required
- External boiler
- 1 wire shelf
- 1 TopClean baking tray
- 1 stainless-steel tray, perforated and unperforated
- 1 food probe
- 1 "Magical steaming" recipe book

Operation and display

- Sensor buttons and adjusting knob
- Full-colour graphic display
- Loudspeaker with acoustic signals
- Time, saved up to 12 hrs
- Programme duration/end
- Temperature suggestion
- Cooking space temperature
- Internal food temperature
- Descaling programme



Combi-Steam SE 60 CS SE 60
Black glass CSSEZ60/23010
Stainless steel CSSEZ60c/23010

Front design



- Mirrored triple glass door
- Designer handle
- Appliance dimensions (H x W x D):
598 x 596 x 569 mm

Operating modes and features



- Cooking space: 55 l, double enamel
- Water tank with ejection system;
volume: 0.9 l
- Illumination: 1 halogen lamp
- Climate sensor
- Automatic height compensation
- Post-ventilation as required
- External boiler
- 1 wire shelf
- 1 TopClean baking tray
- 1 perforated stainless-steel tray

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Acoustic signal
- Time, saved up to 12 hrs
- Programme duration/end
- Temperature suggestion
- Cooking space temperature
- Internal food temperature
- Descaling programme

Combi-Steam SL 60

Options



- Retractable handle

- Roller runner
- "Baking treats" recipe book

Combi-Steam SE 60

Options

- Roller runner
- "Baking treats" recipe book
- "Magical steaming" recipe book

ACCESSORIES: COMBI-STEAMERS AND STEAMERS

Combi-Steam MSLQ/XSL and Combi-Steam SL/SE



Perforated cooking tray



Stainless-steel tray



TopClean baking tray
W x D x H: 452 x 380 x 28 mm

Double-enamel baking tray
W x D x H: 430 x 370 x 25 mm



Wire shelf

For special accessories for Combi-Steam MSLQ, see page 37

Key for Gastronorm (GN) dimensions

- 1/3 GN: 325 x 354 mm (W x D)
- 1/2 GN: 325 x 265 mm
- 1/3 GN: 325 x 177 mm

Combi-Steam HSL and Steam HSE



Perforated cooking tray

- Height: 40 mm, 1/3 GN
- Height: 65 mm, 1/2 GN
- Height: 40 mm, 1/2 GN
- Height: 40 mm, 1/3 GN
- Height: 65 mm, 1/3 GN



Unperforated cooking tray

- Height: 40 mm, 1/3 GN
- Height: 40 mm, 1/2 GN, with lip
- Height: 40 mm, 1/2 GN
- Height: 65 mm, 1/2 GN
- Height: 40 mm, 1/3 GN
- Height: 65 mm, 1/3 GN
- Height: 100 mm, 1/3 GN

Stainless-steel tray

- Height: 20 mm, 1/3 GN



Enamelled baking tray
Height: 20 mm, 1/3 GN



Wire shelf, 1/3 GN



Fully extending runner

Optional

Roller runner

Optional

Special steamer accessories




White porcelain dish

- Height: 40 mm, 1/3 GN
- Height: 65 mm, 1/2 GN
- Height: 65 mm, 1/3 GN



Stainless-steel steam insert

- 1/3 GN for porcelain dish
- 1/2 GN for porcelain dish
- 1/3 GN for porcelain dish



Stainless-steel terrine mould

- U-shape, including lid
- V-shape, including lid



ThermoBox, 1/3 GN

Serving/warming dish, 1/3 GN, maximum 65 mm²



Round TopClean baking tray

- Diameter: 24 cm
- Diameter: 29 cm
- Diameter: 31 cm



Sushi blade

Including instructions on how to make sushi

Further accessories at
vzug.com

Ovens



If you expect a little more than average from your oven, you will love V-ZUG. These quality appliances transform your home into a gourmet restaurant, a village bakery, a cafe or a pizzeria, whatever takes your fancy. The **Comhair SLP**, for example, offers an excellent selection of saved settings for gourmet meals, a 68 l cooking space

and impressive functions such as hot air, soft roasting for beautifully tender meat à la minute and PizzaPlus for perfect pizzas, flans and quiches. Some of the appliances feature pyrolytic self-cleaning so you do not even have to worry about cleaning them.



SUCCESSFUL COOKING, SIMPLY AND RELIABLY

V-ZUG ovens include exclusive features such as BakeOmatic and the patented soft roasting mode for perfect results, completely automatically. Wow your family and friends with your own creations or one of the saved gourmet meals.

Developed and manufactured in Switzerland

GourmetGuide – simple preparation thanks to automatic programmes

A range of intelligent programmes with unique settings such as the patented soft roasting or BakeOmatic allows you to achieve perfect results – with success guaranteed.

EasyCook – tips on settings with suggestions for the right operating mode

With over 100 helpful factory settings for individual foods, you can achieve optimum results at the touch of a button.

BakeOmatic – delicious meals, prepared fully automatically

With BakeOmatic, there is no need to enter the cooking time, temperature, operating mode or quantity manually. The unique sensor technology in the Climate Control System (CCS) allows the appliance to detect the quantity and size of the meal automatically and thus select the best sequence of different operating modes with the precise temperatures and cooking times required. And you know exactly when it will be ready.

Patented soft roasting – beautifully tender meat exactly when you want it

You have invited guests and want to sit down to eat at 8 p.m. What are you doing while your guests are enjoying the appetisers? Are you constantly flitting back to the kitchen to check on the fillet? Not with the sophisticated soft roasting mode. This innovation for seared meat automatically monitors the internal temperature of the meat and adjusts the steamer temperature accordingly. The meat is ready to serve exactly when you want, regardless of the shape, thickness or quantity. This means you can keep your guests company during the appetisers. And because the fillet will be beautifully tender, you can also impress them with your brilliant cooking.

Perfect meat dishes with the food probe

A good cut of meat deserves only the best preparation. Simply push the food probe into the meat, connect to the appliance and select the type of meat, internal temperature, degree of doneness and end time. The meat is gently cooked to the exact time and degree of doneness you want. And in the meantime, you can tend to your guests or prepare the side dishes and the sauce. Your guests will be impressed by the results.

A total of 52 saved recipes can be accessed at the touch of a button

Cook like a professional? No problem with the new generation of ovens from V-ZUG. We have prepared 52 wonderful recipes for every occasion for you. The recipes collected in the “Baking treats” book are already saved on the appliance and can be accessed simply at the touch of a button. All you need to do is provide and prepare the ingredients in the quantities specified, insert the dish into the cooking space and start the appliance. You can leave the rest to the oven. You will love these recipes, and your guests will too.

Favourites

You have the option of saving up to 24 favourites alongside the recipes which are already saved. For example, you can save your favourite recipes from grandmother’s recipe book or other recipes you often use on the device and give them a name. These are then available to use or amend at any time at the touch of a button.

V-ZUG OVENS PRACTICALLY CLEAN THEMSELVES



TopClean from V-ZUG gives residues barely any chance to stick

It is the high-tech solution among cleaning aids: the new, specially developed coating on the enamel means even less effort is required to clean the cooking space or the baking trays. The excellent non-stick properties mean residues can be simply and effortlessly removed with a damp cloth.



The pyrolytic self-cleaning function adds heat to ensure cleanliness in no time

This type of cleaning transforms dirt into ash by heating up the cooking space. All you need is a damp cloth to wipe away the ash. The appliances with pyrolytic self-cleaning now have an elegant glass door which is easy to clean.



Stainless-steel fronts with TouchClean

Visible fingerprints on the front are a thing of the past. The TouchClean coating largely prevents fingerprints and makes cleaning much easier.



Fully extending runners for easy handling

The new, highly robust fully extending runners (runner length: 457 mm) allow you to remove the food being cooked or baked fully from the cooking space safely and comfortably. This is really handy for basting a cut of meat or removing the baking tray. This highly practical option can be ordered for ovens with a convenience level of SE or higher. All other ovens and cookers feature the standard runners (runner length: 302 mm).

PRODUCT COMPARISON: OVENS

	Comhair SLP	Comhair SL	Comhair SEP	Comhair SE	Comhair XSLP	Comhair XSL	Comhair XSEP	Comhair XSE	Comhair HSE
Brochure page	48	48	49	49	50	50	51	51	51
Versions									
Stainless steel	✓	✓	✓	✓	✓	✓	✓	✓	✓
Black glass	✓	✓	✓	✓	✓	✓	✓	✓	✓
Black glass with retractable handle		✓*				✓*			
Illumination/automatically with door	Halogen/✓	Halogen/✓	Halogen/✓	Halogen	Halogen/✓	Halogen	Halogen/✓	Halogen	Halogen
Cooking space volume	68	68	68	68	50	50	50	50	39
Compact oven					✓	✓	✓	✓	
Mini oven									✓
Energy efficiency class	A	A	A	A	A	A	A	A	A
Unique V-ZUG innovations									
BakeOmatic with Climate Control System (CCS)	✓	✓			✓	✓			
Climate sensor	✓	✓			✓	✓			
Soft roasting	✓	✓	✓	✓	✓	✓	✓	✓	✓
Food probe	✓	✓	✓	✓	✓	✓	✓	✓	✓
Integrated recipes	✓	✓			✓	✓			
Uses									
Top/bottom heat	✓	✓	✓	✓	✓	✓	✓	✓	✓
Hot air	✓	✓	✓	✓	✓	✓	✓	✓	✓
PizzaPlus	✓	✓	✓	✓	✓	✓	✓	✓	✓
Grill	✓	✓	✓	✓	✓	✓	✓	✓	✓
Operation and display									
Fully electronic operation	✓	✓	✓	✓	✓	✓	✓	✓	✓
Sensor buttons	✓	✓	✓	✓	✓	✓	✓	✓	✓
Electronic time switch	✓	✓	✓	✓	✓	✓	✓	✓	✓
Full-colour graphic display	✓	✓			✓	✓			
Graphic display			✓	✓			✓	✓	✓
Pyrolytic self-cleaning	✓		✓		✓		✓		
TopClean		✓		✓		✓		✓	✓

* Optional.



Combaire SLP 60 BC SLP 60
Black glass BCSLPZ60/21025
Stainless steel BCSLPZ60c/21025

Front design



- Mirrored quadruple glass door
- Designer handle
- Appliance dimensions (H x W x D): 598 x 596 x 569 mm

Operating modes and features



- Cooking space: 68 l, brilliant enamel
- Illumination: 2 halogen lamps
- Energy-saving ventilation
- Post-ventilation as required
- 2 TopClean baking trays
- 1 wire shelf
- 1 food probe
- Rotisserie
- 1 "Baking treats" recipe book

Operation and display

- Sensor buttons and adjusting knob
- Full-colour graphic display
- Loudspeaker with acoustic signals
- Time, saved up to 12 hrs
- Operating mode
- Programme duration/end
- Temperature suggestions
- Cooking space temperature
- Internal food temperature

Combaire SL 60 BC SL 60
Black glass BCSLZ60/21022
Stainless steel BCSLZ60c/21022

Front design



- Mirrored triple glass door
- Designer handle
- Appliance dimensions (H x W x D): 598 x 596 x 569 mm

Operating modes and features



- Cooking space: 68 l, TopClean
- Illumination: 2 halogen lamps
- Energy-saving ventilation
- Post-ventilation as required
- 2 TopClean baking trays
- 1 wire shelf
- 1 food probe
- Rotisserie
- 1 "Baking treats" recipe book

Operation and display

- Sensor buttons and adjusting knob
- Full-colour graphic display
- Loudspeaker with acoustic signals
- Time, saved up to 12 hrs
- Operating mode
- Programme duration/end
- Temperature suggestions
- Cooking space temperature
- Internal food temperature

Options/accessories
Combaire SLP 60 and Combaire SL 60



- Retractable handle (BC SL 60)

- Sensor roasting basket
- Fully extending runner



Combaire SEP 60 BC SEP 60
Black glass BCSEPZ60/21019
Stainless steel BCSEPZ60c/21019

Front design



- Mirrored quadruple glass door
- Designer handle
- Appliance dimensions (H x W x D): 598 x 596 x 569 mm

Operating modes and features



- Cooking space: 68 l, brilliant enamel
- Illumination: 2 halogen lamps
- Post-ventilation as required
- 2 TopClean baking trays
- 1 wire shelf
- 1 food probe

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Acoustic signal
- Time, saved up to 12 hrs
- Operating mode
- Programme duration/end
- Temperature suggestions
- Cooking space temperature
- Internal food temperature

Combaire SE 60 BC SE 60
Black glass BCSEZ60/21016
Stainless steel BCSEZ60c/21016

Front design



- Mirrored triple glass door
- Designer handle
- Appliance dimensions (H x W x D): 598 x 596 x 569 mm

Operating modes and features



- Cooking space: 68 l, TopClean
- Illumination: 2 halogen lamps
- Post-ventilation as required
- 2 TopClean baking trays
- 1 wire shelf
- 1 food probe

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Acoustic signal
- Time, saved up to 12 hrs
- Operating mode
- Programme duration/end
- Temperature suggestions
- Cooking space temperature
- Internal food temperature

Options/accessories
Combaire SEP 60 and Combaire SE 60

- Fully extending runner
- "Baking treats" recipe book



Combair XSLP 60 BC XSLP 60

Black glass BCXSLPZ60/21028
Stainless steel BCXSLPZ60c/21028

Front design



- Mirrored quadruple glass door
- Designer handle
- Appliance dimensions (H x W x D):
454 x 596 x 568 mm

Operating modes and features



- Cooking space: 50 l, brilliant enamel
- Illumination: 2 halogen lamps
- Energy-saving ventilation
- Post-ventilation as required
- 2 TopClean baking trays
- 1 wire shelf
- 1 food probe
- 1 "Baking treats" recipe book

Operation and display

- Sensor buttons and adjusting knob
- Full-colour graphic display
- Loudspeaker with acoustic signals
- Time, saved up to 12 hrs
- Operating mode
- Programme duration/end
- Temperature suggestions
- Cooking space temperature
- Internal food temperature



Combair XSL 60 BC XSL 60

Black glass BCXSLZ60/21023
Stainless steel BCXSLZ60c/21023

Front design



- Mirrored triple glass door
- Designer handle
- Appliance dimensions (H x W x D):
454 x 596 x 568 mm

Operating modes and features



- Cooking space: 50 l, TopClean
- Illumination: 2 halogen lamps
- Energy-saving ventilation
- Post-ventilation as required
- 2 TopClean baking trays
- 1 wire shelf
- 1 food probe
- 1 "Baking treats" recipe book

Operation and display

- Sensor buttons and adjusting knob
- Full-colour graphic display
- Loudspeaker with acoustic signals
- Time, saved up to 12 hrs
- Operating mode
- Programme duration/end
- Temperature suggestions
- Cooking space temperature
- Internal food temperature

Options/accessories

Combair XSLP 60 and Combair XSL 60



- Retractable handle (BC XSL 60)

- Fully extending runner



Combair XSEP 60 BC XSEP 60

Black glass BCXSEPZ60/21027
Stainless steel BCXSEPZ60c/21027

Front design



- Mirrored quadruple glass door
- Designer handle
- Appliance dimensions (H x W x D):
454 x 596 x 568 mm

Operating modes and features



- Cooking space: 50 l, brilliant enamel
- Illumination: 1 halogen lamp
- Post-ventilation as required
- 2 TopClean baking trays
- 1 wire shelf
- 1 food probe

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Loudspeaker with acoustic signals
- Time, saved up to 12 hrs
- Operating mode
- Programme duration/end
- Temperature suggestions
- Cooking space temperature
- Internal food temperature



Combair XSE 60 BC XSE 60

Black glass BCXSEZ60/21017
Stainless steel BCXSEZ60c/21017

Front design



- Mirrored triple glass door
- Designer handle
- Appliance dimensions (H x W x D):
454 x 596 x 568 mm

Operating modes and features



- Cooking space: 50 l, TopClean
- Illumination: 1 halogen lamp
- Post-ventilation as required
- 2 TopClean baking trays
- 1 wire shelf
- 1 food probe

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Acoustic signal
- Time, saved up to 12 hrs
- Operating mode
- Programme duration/end
- Temperature suggestions
- Cooking space temperature
- Internal food temperature



Combair HSE 60 BC HSE 60

Black glass BCHSEZ60/21004
Stainless steel BCHSEZ60c/21004

Front design



- Mirrored triple glass door
- Designer handle
- Appliance dimensions (H x W x D):
379 x 596 x 568 mm

Operating modes and features



- Cooking space: 39 l, TopClean
- Illumination: 1 halogen lamp
- Post-ventilation as required
- 1 TopClean baking tray
- 1 wire shelf
- 1 food probe

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Acoustic signal
- Time, saved up to 12 hrs
- Operating mode
- Programme duration/end
- Temperature suggestions
- Cooking space temperature
- Internal food temperature

Options/accessories

Combair XSEP 60, Combair XSE 60 and Combair HSE 60

- Fully extending runner
- "Baking treats" recipe book

Warming and System drawers



PLENTY OF SPACE FOR PREHEATING AND KEEPING WARM

The new warming drawers are perfect in combination with the ovens, steamers and Coffee Centres from V-ZUG. This gives you additional flexibility and added value in your kitchen. The high-quality drawers have a stainless-steel interior which is very easy to clean and feature a telescopic runner which can cope with weights of up to 25 kg.

Push/pull system for a handle-free kitchen

The warming drawer has no handles, so it can be positioned anywhere in the kitchen. The drawer is easy to open using the convenient push/pull system.



Warming drawer 60 283 WS 60 283

Black glass WS60283/34013
Stainless steel WS60283c/34013

Front design



- Appliance dimensions (H x W x D):
281 x 596 x 547 mm

Features

- Capacity: basic place settings for 20 people or 40 plates (Ø 27 cm)
- Stable telescopic runner with SoftClose
- Chrome-steel interior
- Base with glass heating plate
- Additional heating with radial fan to heat plates
- Electronic temperature control with optical operating display, 7 levels
- Temperature range: approximately 30°C to 80°C glass surface temperature
- Push/pull system



Warming drawer 60 220 WS 60 220

Black glass WS60220/34012
Stainless steel WS60220c/34012

Front design



- Appliance dimensions (H x W x D):
218 x 596 x 547 mm

Features

- Capacity: basic place settings for 15 people or 30 plates (Ø 27 cm)
- Stable telescopic runner with SoftClose
- Chrome-steel interior
- Base with glass heating plate
- Additional heating with radial fan to heat plates
- Electronic temperature control with optical operating display, 7 levels
- Temperature range: approximately 30°C to 80°C glass surface temperature
- Push/pull system



Warming drawer 60 162 WS 60 162

Black glass WS60162/34011
Stainless steel WS60162c/34011

Front design



- Appliance dimensions (H x W x D):
160 x 596 x 547 mm

Features

- Capacity: basic place settings for 10 people or 20 plates (Ø 27 cm)
- Stable telescopic runner with SoftClose
- Chrome-steel interior
- Base with glass heating plate
- Additional heating with radial fan to heat plates
- Electronic temperature control with optical operating display, 7 levels
- Temperature range: approximately 30°C to 80°C glass surface temperature
- Push/pull system



Warming drawer 60 144 WS 60 144

Black glass WS60144/34010
Stainless steel WS60144c/34010

Front design



- Appliance dimensions (H x W x D):
142 x 596 x 547 mm

Features

- Capacity: basic place settings for 6 people or 14 plates (Ø 27 cm)
- Stable telescopic runner
- Chrome-steel interior
- Base with glass heating plate
- Additional heating with radial fan to heat plates
- Electronic temperature control with optical operating display, 7 levels
- Temperature range: approximately 30°C to 80°C
- Push/pull system



System drawer 60 144 SYS 60 144

Black glass SYS60144/35001
Stainless steel SYS60144c/35001

Front design



- Appliance dimensions (H x W x D):
142 x 596 x 547 mm

Features

- Stable telescopic runner
- Push/pull system



System drawer 60 76 SYS 60 76

Black glass SYS6076/35002
Stainless steel SYS6076c/35002

Front design



- Appliance dimensions (H x W x D):
74 x 596 x 560 mm

Features

- Stable telescopic runner
- Push/pull system

Microwaves



MAKING BIG WAVES IN THE KITCHEN

Dishes of all kinds can be prepared with the vitamins preserved and with no fat or salt – perfect for your figure! A whole meal is ready to serve in no time.

Automatic reheat – effortless and completely automatic

Heating up your plated meals is simple and takes just one touch of a button. You do not need to set the operating mode, the temperature or the time.

Favourites button – your favourite programme at the touch of a button

You can use this function to save your favourite programme. You can then access it quickly and easily whenever you want.

Hot air – combi mode for perfect gratins in half the time

In hot air mode, the microwave can be used to bake bread and pastries simply and conveniently. Dishes also take half the time to prepare in combi mode with microwave as they would in a conventional oven.

CombiCrunch – golden brown, crispy results

This operating mode combines the microwave and grill. The CombiCrunch plate ensures your pizza or mini cheese quiche is golden brown on top and perfectly crispy underneath.

AutomaticPlus – the automatic programmes

Best results from the start thanks to up to 31 automatic programmes. They help you with food-friendly defrosting (PerfectDefrost), reheating, crisping, baking, roasting, melting or defrosting. These are all perfected in the Miwell-Combi XSL. The intelligent sensor system automatically calculates the cooking time for plated meals, so there is no need to enter the operating mode, quantity or cooking time.

PRODUCT COMPARISON: MICROWAVES

	Miwell-Combi XSL	Miwell-Combi HSL	Miwell HSL	Miwell L
Brochure page	56	56	56	57
Versions				
Installation in tall unit	✓	✓	✓	✓
Installation in wall unit				✓
Stainless steel	✓	✓	✓	✓
Black glass	✓	✓	✓	
Black design				✓
Illumination	✓	✓	✓	✓
Cooking space volume	l	40	31	22
Maximum microwave power level	W	900	1000	750
Grill	W	1600	800	800
Glass turntable	cm	40	32.5	25
Unique V-ZUG innovations				
Microwave levels		18	20	20
3-D input		✓	✓	✓
Operating time		✓	✓	✓
Switch-off time		✓	✓	✓
Uses				
Microwave		✓	✓	✓
Grill		✓	✓	✓
CombiCrunch		✓	✓	
Hot air		✓	✓	
Grill and forced convection		✓		
Fast heating		✓	✓	
Favourites		✓	✓	
PerfectDefrost		✓	✓	✓
AutomaticPlus		✓	✓	
AutomaticPlus with sensors		✓		
Automatic reheat		✓		
Operation and display				
Fully electronic operation		✓	✓	✓
Sensor buttons		✓	✓	✓
Electronic time switch		✓	✓	✓
Graphic display	11 languages	✓	✓	✓
Digital display				✓
Obstacle-free and easy-to-clean cooking space		✓	✓	✓



Miwell-Combi XSL 60 MWC XSL 60

The compact microwave oven for simple installation in a tall unit

Black glass MWCXSL60/24009
Stainless steel MWCXSL60c/24009

Front design



- Black glass door front
- Designer handle
- Appliance dimensions (H x W x D): 454 x 596 x 567 mm

Operating modes and features



- Cooking space: 40 l, stainless steel
- 18 microwave levels (900 to 50 W)
- Illumination: 1 light bulb
- 3-D input
- Real hot air
- Fast heating
- 1600 W grill
- Ø 40 cm glass turntable
- 1 shelf with baking tray
- 2 support wire shelves
- CombiCrunch plate with handle
- 2 food covers
- 31 automatic programmes

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Time
- Operating mode
- Microwave power
- Operating time
- Switch-off time
- Setting suggestions
- Cooking space temperature



Miwell-Combi HSL 60 MWC HSL 60

The small microwave oven for simple installation in a tall unit

Black glass MWCHSL60/24008
Stainless steel MWCHSL60c/24008

Front design



- Black glass door front
- Designer handle
- Appliance dimensions (H x W x D): 378 x 596 x 516 mm

Operating modes and features



- Cooking space: 31 l, stainless steel
- 20 microwave levels (1000 to 50 W)
- Illumination: 1 light bulb
- 3-D input
- Real hot air
- 800 W quartz grill
- Ø 32.5 cm glass turntable
- 2 support wire shelves
- CombiCrunch plate with handle
- 2 food covers
- 31 automatic programmes

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Time
- Operating mode
- Microwave power
- Operating time
- Switch-off time
- Setting suggestions
- Cooking space temperature



Miwell HSL 60 MW HSL 60

The comfort model for simple installation in a tall unit

Black glass MWHSL60/24006
Stainless steel MWHSL60c/24006

Front design



- Black glass door front
- Designer handle
- Appliance dimensions (H x W x D): 378 x 596 x 470 mm

Operating modes and features



- Cooking space: 31 l, stainless steel
- 20 microwave levels (1000 to 50 W)
- Illumination: 1 light bulb
- 3-D input
- 800 W quartz grill
- Ø 32.5 cm glass turntable
- 1 support wire shelf
- CombiCrunch plate with handle
- 2 food covers
- 22 automatic programmes

Operation and display

- Sensor buttons and adjusting knob
- Graphic display
- Time
- Operating mode
- Microwave power
- Operating time
- Switch-off time
- Setting suggestions



Miwell L 60 MW L 60

The budget model for simple installation in a wall or tall unit

Black design MWL60/24002
Stainless steel MWL60c/24002

Front design



- Black glass door front
- No handle
- Appliance dimensions (H x W x D): 378 x 596 x 320 mm

Operating modes and features



- Cooking space: 22 l
- 4 microwave levels (750/500/350/160 W)
- Illumination: 1 light bulb
- 3-D input
- Ø 25 cm glass turntable
- 2 food covers
- Left door opening

Operation and display

- Fully electronic operation
- Digital display
- Time
- Operating mode
- Microwave power
- Weight for weight-based programmes
- Operating time
- Switch-off time
- Setting suggestions

Coffee Centres



STYLISH DESIGN AND PERFECT COFFEE FLAVOUR

The best time to enjoy a freshly prepared coffee is in a calm, relaxed moment. The V-ZUG Coffee Centre turns you into a real master coffee brewer. This machine lets you make speciality coffee effortlessly and just the way you like it.



Become a barista at the touch of a button

With the built-in automatic milk frother, you can conjure up perfect froth for cappuccino, latte macchiato, café au lait or simply a hot milk with a deliciously light foamy topping. The Supremo has five adjustable coffee strengths, from extra-mild to very strong to ensure you get the strength you want, and there is always hot water available for a lovely cup of tea.

Easy operation and maintenance


Coffee the way you like it. The clear sensor buttons ensure intuitive operation of all operating modes. Preparation is very simple, and the text display tells you about what is going on and gives useful instructions such as "Top up water" or "Descale". The built-in milk frother is cleaned simply at the touch of a button, the milk container can be removed and is perfect for storing in the fridge. It is also completely dishwasher-safe.

Ground coffee or coffee beans?

A clever system with two containers means you can always choose between ground coffee and coffee beans.

The coffee whisperer

The built-in cone mill is virtually silent and provides freshly ground coffee whenever you want it.



Supremo XSL 60 CCS XSL 60

Black glass CCSXSL60/25003
Stainless steel CCSXSL60c/25003

Front design



- Appliance dimensions (H x W x D):
454 x 596 x 412 mm



Operating modes and features



- At the touch of a button:
cup of coffee, espresso, cappuccino, latte macchiato, café au lait, hot water, hot milk
- Fully automatic machine for 1 or 2 cups
- Programmable quantities for 3 different cup sizes
- 80 to 110 mm height-adjustable dispensing head
- LED-lit cup tray
- Individual grinder settings (13 steps)
- Capacity:
Water tank: 1.8 l
Coffee bean holder: 200 g
Waste grounds container: 14 units

Operation and display

- Programmable brewing temperature
- Programmable pre-brewing temperature
- Programmable grinding quantity
- Programmable water hardness
- Programmable operating time/switch-off time
- Integrated cleaning programme
- Automatic descaling programme

Accessories

- 7.5 dl milk container
- Descaler



Supremo HSL 60 CCS HSL 60

Black glass CCHSL60/25002
Stainless steel CCHSL60c/25002

Front design



- Appliance dimensions (H x W x D):
378 x 596 x 412 mm



Operating modes and features



- At the touch of a button:
cup of coffee, espresso, cappuccino, latte macchiato, café au lait, hot water, hot milk
- Fully automatic machine for 1 or 2 cups
- Programmable quantities for 3 different cup sizes
- 80 to 110 mm height-adjustable dispensing head
- LED-lit cup tray
- Individual grinder settings (13 steps)
- Capacity:
Water tank: 1.8 l
Coffee bean holder: 200 g
Waste grounds container: 14 units



Operation and display

- Programmable brewing temperature
- Programmable pre-brewing temperature
- Programmable grinding quantity
- Programmable water hardness
- Programmable operating time/switch-off time
- Integrated cleaning programme
- Automatic descaling programme

Accessories

- 7.5 dl milk container
- Descaler

Hobs

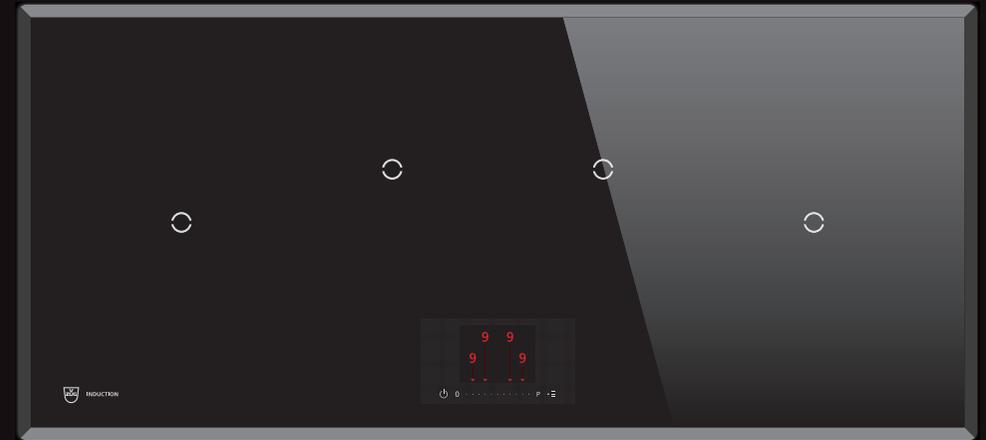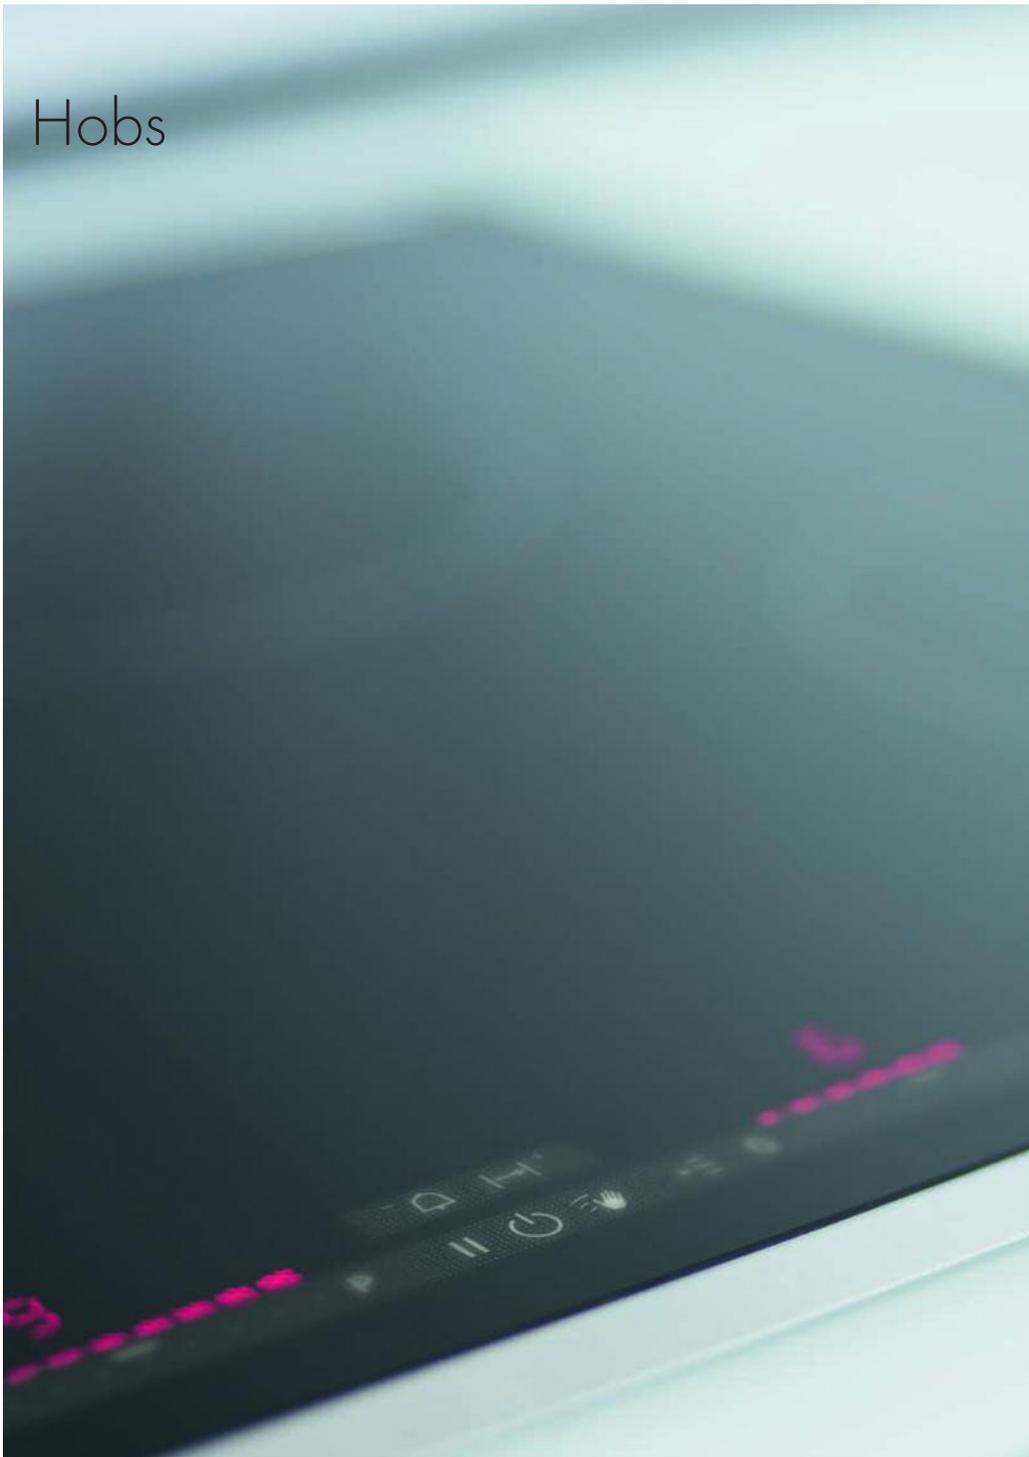

Cooking with induction technology offers many advantages. These include unbeatable speed, very short reaction times and simple cleaning because the whole hob remains largely cold. For your safety, the hob switches off automatically when the pan is removed. The latest-generation **MaxiFlex** hobs have impressive sophisticated

technology and a modern design with plain, puristic lines. The symbols on the glass surfaces and in the control area are kept simple, while the black glass integrates perfectly into the kitchen design. The MaxiFlex hobs offer a range of options, with automatic programmes to make everyday cooking easier.



WORLD-EXCLUSIVE EASY COOKING

GK46TIAKS hobs feature automatic functions. Food which you prepare often, such as pasta or rice, can be prepared at the touch of a button and does not need to be watched, which makes cooking much easier.

	 World-exclusive Rice Control	 World-exclusive Cooking Control	 World-exclusive Temperature Control
Function	There are fixed programmes for the preparation of all sorts of different rice.	The hob recognises the boiling point and automatically switches to continued cooking.	The hob monitors the temperature of the pan base and keeps it constant.
Operation	Place a lidded pan of rice, water and spices on the cooking zone and select the Rice Control function.	Place a lidded pan of cold water without salt or spices on the cooking zone and select the Cooking Control function and the continued cooking level.	Place a pan of food on the cooking zone and select the power level you want, then select the Temperature Control function.
Benefits	<ul style="list-style-type: none"> ▪ The hob automatically stops cooking when the rice is ready to serve ▪ An acoustic signal indicates that the programme is completed ▪ No boiling over or burning ▪ No need to watch the pan during cooking ▪ Guaranteed success for various types of rice 	<ul style="list-style-type: none"> ▪ A beeper sounds as soon as the food can be added ▪ Makes cooking frequent foods such as pasta, vegetables, boiled potatoes, sausages and eggs easier ▪ When the boiling point is reached, the hob automatically switches to the lower continued cooking level, which saves energy 	<ul style="list-style-type: none"> ▪ The constant temperature enables consistent cooking results when preparing several portions (omelettes, meat, etc.) ▪ Makes reducing sauces and syrups easier ▪ The power levels do not need to be adjusted as often to achieve consistent cooking results

CONVENIENT, QUICK, SAFE AND ENERGY SAVING

Just like cooking in a professional kitchen: V-ZUG induction hobs with intelligent functions make everything easier and more convenient.



MaxiFlex: lots of space and flexible

State-of-the-art inductors mean that pots and pans of various sizes (Ø pan base: 10 to 22 cm) can be placed on any cooking zone. Sensors detect the size and adjust the cooking zone accordingly. Induction technology heats the food in record time while saving energy. The constant power and precision heating enable accurate cooking.

If optimum distances between cooking zones are important to you, select one of our extra-wide hobs, TIPS or TIXS. The panorama cooking zones are ideal for having an overview at all times.

Easy to clean

The rapid heating times are impressive. Keen cooks will also appreciate the very short reaction times and the possibility to make fine adjustments. It is practically impossible to let the pan boil over. As the heat is only generated in the base of the pan, the glass around the cooking zone which is switched on remains cold to a large extent. This means nothing can burn, and cleaning takes just a few seconds with a damp cloth.



V-ZUG THINKS OF EVERYTHING - DOWN TO THE LAST DETAIL



Cooking zone combination which gets everything right

If you want as much flexibility and variety as a professional chef, V-ZUG has the perfect combination of appliances for you. The built-in wok and the Teppan Yaki are perfect in combination with the GK26TIMS.2F induction hob. All hobs are 40 cm wide and can simply be operated via slider control. With adjusted corner radii and a new fitting system, the design of this combination has also been refined.

Wok cooking is in vogue and also very healthy – your guests will be impressed

Would you like to stew, stir-fry or deep-fry? No problem! The new induction wok from V-ZUG allows you to cook quickly and gently. Quickly, because induction heats water in record time, and gently because vitamins, minerals and nutrients are largely preserved. Short searing and cooking times and immediate reaction to power adjustments make the wok a really energy-saving option. It is also very user-friendly, because food residues cannot burn onto the glass ceramic plate as only the pan gets hot.

Frying and cooking on the induction Teppan Yaki

The Teppan Yaki also works with induction and can be set to temperatures of between 70°C and 240°C. It is perfect for low-fat frying of meat and fish or for cooking vegetables and also offers additional benefits:

- Very little fat is required
- Automatic functions, ideal for meat, fish and vegetables
- Excellent preservation of delicate flavours
- Valuable substances such as proteins are perfectly preserved
- Excellently suited to diet and wholefood cooking
- No overheating
- Easy to clean
- Saves energy thanks to induction technology
- Comes with 1 food cloche and 2 spatulas

Included in the price: the professional wok set

For professional results, once you have purchased an induction wok, you need the right accessories.

- Wok pan for your safety
- Pan lid for stewing
- Rack for deep-frying
- Wok stand for ergonomic storage of the wok once you have finished cooking



PERFECT INTEGRATION INTO ANY KITCHEN

Gas hobs with a supported frame (bevelled edges) are popular on account of the elegant frame effect.

Flush model hobs can be perfectly integrated into any work-surface design. They provide a higher degree of compactness in the kitchen.

Hobs with a Stainless-steel trim are exceedingly simple to install and have a classic design. They fit into a range of kitchen configurations.



Flush model



Stainless-steel trim



Faceted model

PRODUCT COMPARISON: INDUCTION HOBS

	GK16TIYS.1F	GK16TIWS.1F Wok	GK26TIWS.2F	GK26TIYS.1F	GK46TIWS	GK56TIWS	GK46TIWS	GK46TIWS	GK46TIWS	GK26TIWS	GK46TIWS	GK47TIWS	GK46TIWS	GK37TIWS	GK37TIWS
Brochure page	69	69	69	69	70	70	70	71	71	71	72	72	72	73	73

Versions

Stainless-steel trim					✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
Flush model	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Faceted model					✓	✓	✓		✓	✓	✓	✓	✓	✓	✓

Uses

Number of cooking zones	2	1	2	2	4	5	4	4	4	2	4	4	4	3	3
Number of zones with PowerPlus		1	2		4	5	4	4	4	2	4	4	4	3	3
Bridging function	✓		✓	✓	✓	✓	✓	✓	✓						
Frying zone													✓		

Operation/maintenance

Multi-slider/direct selection	✓	✓	✓	✓		✓		✓	✓	✓	✓	✓	✓	✓	
Single slider															✓
Graphic display					✓		✓								
Timer	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Automatic switch-off function	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Pause button		✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Automatic boost			✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Rice Control												✓			
Cooking Control												✓			
Temperature Control												✓			
Simmer function					✓	✓	✓	✓	✓						✓
Wipe protection button	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Restore function	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Large cooking zone spacing			✓		✓	✓	✓	✓	✓		✓	✓	✓	✓	✓
Keep-warm setting		✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Short reaction time	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Childproof lock	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓



GK16TIYS.1F Teppan Yaki
Flush model GK16TIYSF/31008

- Appliance dimensions (H × W × D): 56.1 × 384 × 501 mm/R5

Operating modes and features



- 2 induction frying zones (front/back)
- Maximum power: 2 × 1400 W
- 7 temperature levels (70°C to 240°C)
- Fine, precise controls
- Included: 2 spatulas, 1 food cloche



GK16TIWS.1F Wok
Flush model GK16TIWSF/31010

- Appliance dimensions (H × W × D): 128.5 × 384 × 501 mm/R5

Operating modes and features



- 1 induction wok zone
- Maximum power with PowerPlus: 3000 W
- Very rapid heating times
- Fine, precise controls
- Restore function
- Included: professional wok set



GK26TIWS.2F Wok
Flush model GK26TIWSF/31001

- Appliance dimensions (H × W × D): 50 × 384 × 501 mm/R5

Operating modes and features



- 2 induction cooking zones
- Maximum power with PowerPlus: 2 × 3700 W
- Very rapid heating times
- Fine, precise controls
- Restore function




GK26TIYSF.1F Teppan Yaki
Flush model GK26TIYSF/31009

- Appliance dimensions (H × W × D): 56.1 × 571 × 501 mm/R5

Operating modes and features



- 2 induction frying zones (front/back)
- Maximum power: 2 × 2800 W
- 7 temperature levels (70°C to 240°C)
- Fine, precise controls
- Included: 2 spatulas, 1 food cloche



GK46TIMPSC

Stainless-steel trim GK46TIMPSC/31029

- Appliance dimensions (H×W×D):
48×910×410 mm

Operating modes and features



Black Design

- 4 induction cooking zones
- Maximum power with PowerPlus: 4 × 3700 W
- Very rapid heating times
- Fine, precise controls



GK56TIMSC

Stainless-steel trim GK56TIMSC/89A


- Appliance dimensions (H×W×D):
48×910×514 mm

Operating modes and features



Black Design

- 5 induction cooking zones
- Maximum power with PowerPlus: 5 × 3700 W
- Ø 28 cm centre cooking zone
- Very rapid heating times
- Fine, precise controls
- Restore function



GK46TIMASC

Stainless-steel trim GK46TIMASC/31030


- Appliance dimensions (H×W×D):
48×774×514 mm

Operating modes and features



Black Design

- 4 induction cooking zones
- Maximum power with PowerPlus: 4 × 3700 W
- Very rapid heating times
- Fine, precise controls



GK46TIMXSC

Stainless-steel trim GK46TIMXSC/31002


- Appliance dimensions (H×W×D):
48×704×514 mm

Operating modes and features



Black Design

- 4 induction cooking zones
- Maximum power with PowerPlus: 4 × 3700 W
- Very rapid heating times
- Fine, precise controls
- Restore function



GK46TIMSC

Stainless-steel trim GK46TIMSC/88A

- Appliance dimensions (H×W×D):
48×584×514 mm

Operating modes and features



Black Design

- 4 induction cooking zones
- Maximum power with PowerPlus: 4 × 3700 W
- Very rapid heating times
- Fine, precise controls
- Restore function



GK26TIMS

Faceted model GK26TIMS/84A

- Appliance dimensions (H×W×D):
45.7×289×514 mm

Operating modes and features



Black Design

- 2 induction cooking zones
- Maximum power with PowerPlus: 2 × 3700 W
- Very rapid heating times
- Fine, precise controls
- Restore function

GK46TIMPS

Faceted model GK46TIMPS/31029

- Appliance dimensions (H×W×D):
45.7×910×410 mm

- Same features as GK46TIMPSC

GK56TIMS

Faceted model GK56TIMS/89A

- Appliance dimensions (H×W×D):
45.7×910×514 mm

- Same features as GK56TIMSC

GK46TIMAS

Faceted model GK46TIMAS/31030

- Appliance dimensions (H×W×D):
45.7×774×514 mm

- Same features as GK46TIMASC

GK46TIMXSF

Flush model GK46TIMXSF/31002

- Appliance dimensions (H×W×D):
50×691×501 mm/R5

- Same features as GK46TIMXSC

GK46TIMS

Faceted model GK46TIMS/88A

- Appliance dimensions (H×W×D):
45.7×584×514 mm

- Same features as GK46TIMSC

GK26TIMS.1F

Flush model GK26TIMS.2F/31011

- Appliance dimensions (H×W×D):
50×281×501 mm/R5

- Same features as GK26TIMS

GK46TIMPSF

Flush model GK46TIMPSF/31029

- Appliance dimensions (H×W×D):
50×880×380 mm

- Same features as GK46TIMPSC

GK56TIMS.1F

Flush model GK56TIMSF/31020

- Appliance dimensions (H×W×D):
50×897×501 mm/R5

- Same features as GK56TIMSC

GK46TIMASF

Flush model GK46TIMASF/31030

- Appliance dimensions (H×W×D):
50×761×501 mm/R5


- Same features as GK46TIMASC

GK46TIMS.1F

Flush model GK46TIMSF/31014

- Appliance dimensions (H×W×D):
50×571×501 mm/R5

- Same features as GK46TIMSC



GK46TIAKSC
Stainless-steel trim GK46TIAKSC/90A

- Appliance dimensions (H x W x D):
48 x 774 x 514 mm

Operating modes and features



- With innovative ComfortCooking
- 4 induction cooking zones (14.5 cm, 18 cm, 2 x 18 cm, 21 cm)
- Maximum power with PowerPlus: 2200/3000/3700 W
- Very rapid heating times
- Fine, precise controls
- Restore function



GK47TIMPSC
Stainless-steel trim GK47TIMPSC/31036

- Appliance dimensions (H x W x D):
48 x 910 x 410 mm

Operating modes and features



- Panorama cooking zone
- 4 induction cooking zones
- Maximum power with PowerPlus (from left to right): 3000/3700/3700/3000 W
- Very rapid heating times
- Fine, precise controls
- Restore function




GK46TIABSC
Stainless-steel trim GK46TIABSC/028

- Appliance dimensions (H x W x D):
48 x 774 x 514 mm

Operating modes and features



- 4 induction cooking zones (14.5 cm, 18 cm, 18 to 28 cm, 21 cm)
- Maximum power with PowerPlus: 2200/3000/3700/3700 W
- 1 automatically switchable frying zone (18 x 28 cm)
- Very rapid heating times
- Fine, precise controls
- Restore function




GK37TIMPSC
Stainless-steel trim GK37TIMPSC/31038

- Appliance dimensions (H x W x D):
48 x 774 x 444 mm

Operating modes and features



- Panorama cooking zone
- 3 induction cooking zones
- Maximum power with PowerPlus: 3 x 3700 W
- Very rapid heating times
- Fine, precise controls
- Restore function



GK37TIMSC
Stainless-steel trim GK37TIMSC/31041

- Appliance dimensions (H x W x D):
48 x 584 x 514 mm

Operating modes and features



- 3 induction cooking zones
- Maximum power with PowerPlus: 3000 W (front)/2 x 3700 W (back)
- Very rapid heating times
- Fine, precise controls
- Restore function

GK46TIAKS
Faceted model GK46TIAKS/90A

- Appliance dimensions (H x W x D):
45.7 x 774 x 514 mm

- Same features as GK46TIAKSC

GK47TIMPS
Faceted model GK47TIMPS/31036

- Appliance dimensions (H x W x D):
45.7 x 910 x 410 mm

- Same features as GK47TIMPSC

GK46TIABS
Faceted model GK46TIABS/028

- Appliance dimensions (H x W x D):
45.7 x 774 x 514 mm

- Same features as GK46TIABSC

GK37TIMPS
Faceted model GK37TIMPS/31038

- Appliance dimensions (H x W x D):
45.7 x 774 x 444 mm

- Same features as GK37TIMPSC

GK37TIMS
Faceted model GK37TIMS/31041

- Appliance dimensions (H x W x D):
45.7 x 584 x 514 mm

- Same features as GK37TIMSC

GK46TIAKSF
Flush model GK46TIAKSF/90A

- Appliance dimensions (H x W x D):
50 x 761 x 501 mm/R5

- Same features as GK46TIAKSC

GK47TIMPSF
Flush model GK47TIMPSF/31036

- Appliance dimensions (H x W x D):
50 x 880 x 380 mm/R5

- Same features as GK47TIMPSC

GK46TIABSF.1F
Flush model GK46TIABSF/31017

- Appliance dimensions (H x W x D):
50 x 761 x 501 mm/R5

- Same features as GK46TIABSC

GK37TIMPSF
Flush model GK37TIMPSF/31038

- Appliance dimensions (H x W x D):
50 x 744 x 414 mm

- Same features as GK37TIMPSC

GK37TIMSF
Flush model GK37TIMSF/31041

- Appliance dimensions (H x W x D):
50 x 571 x 501 mm/R5

- Same features as GK37TIMSC




TOPTRONIC HOBS

V-ZUG hobs offer the usual sophisticated technology and impress with simple, user-friendly controls. The design also leaves nothing to be desired, giving your kitchen a touch of individuality. At V-ZUG, you can find the hob that is tailored to your needs and fits your kitchen perfectly.



Innovative, convenient operation via slider control

The control system for the independent cooking zones has been adapted to the needs of the modern age. You can adjust the power levels quickly and easily as you would on a smartphone display. The control panel can even be cleaned during cooking – the power levels stay the same thanks to the wipe protection button.




The ultimate in convenience in a standard format

With a width of 56 cm and a depth of 49 cm, the GK45TEBS hob fits the standard size found in many Swiss kitchens. The GK45TEBS includes features such as a dual-ring and a frying zone. The premium version also incorporates a plain hotplate arrangement with 2 × 18 cm, 1 × 14.5 cm and 1 × 17/21 cm and convenient slider control.

PRODUCT COMPARISON: TOPTRONIC HOBS

	GK55TES	GK45TEPS	GK45TEAS	GK45TEBS	GK25TE
Brochure page	76	76	76	77	77
Versions					
Stainless-steel trim	✓	✓	✓	✓	
Flush model	✓	✓	✓	✓	✓
Faceted model	✓	✓			✓
Uses					
Number of cooking zones	5	4	4	4	2
Number of zones with PowerTronic	1				
Number of dual-ring zones		1	1	1	1
Number of frying zones		1	1	1	
Operation/maintenance					
Slider control	✓	✓	✓	✓	
Timer	✓	✓	✓	✓	✓
Automatic switch-off function	✓	✓	✓	✓	✓
Pause button	✓	✓	✓	✓	
Automatic boost	✓	✓	✓	✓	✓
Wipe protection button	✓	✓	✓	✓	
Restore function	✓	✓	✓	✓	
Large cooking zone spacing	✓	✓	✓	✓	
Childproof lock	✓	✓	✓	✓	✓




GK55TESC

Stainless-steel trim GK55TESC/31042

- Appliance dimensions (H×W×D):
41.5×910×514 mm

Operating modes and features




- 5 cooking zones (2×18 cm, 23 cm, 21 cm, 14 cm)
- Maximum power with PowerTronic: 3200 W
- Restore function

GK55TESF

Flush model GK 55TESF/31042

- Appliance dimensions (H×W×D):
44.5×897×501 mm/R5



GK45TEPSC

Stainless-steel trim GK45TEPSC/976

- Appliance dimensions (H×W×D):
41.5×910×410 mm

Operating modes and features



- Panorama cooking zone
- 4 cooking zones (14 cm, 2×18 cm, 14/21 cm)
- 1 cooking zone which can be switched between Ø 14 and 21 cm
- 1 cooking/fryer zone (front left)
- Restore function

GK45TEPS

Faceted model GK45TEPS/976

- Appliance dimensions (H×W×D):
39.5×910×410 mm


- Same features as GK45TEPSC

GK45TEPSF

Flush model GK45TEPSF/976

- Appliance dimensions (H×W×D):
44.5×880×380 mm

- Same features as GK45TEPSC



GK45TEASC

Stainless-steel trim GK45TEASC/977

- Appliance dimensions (H×W×D):
41.5×774×514 mm

Operating modes and features



- 4 cooking zones (14 cm, 2×18 cm, 14/21 cm)
- Back right cooking zone can be switched between Ø 14 and 21 cm
- 1 cooking/fryer zone (back left)
- Restore function

GK45TEAS

Faceted model GK45TEAS/977

- Appliance dimensions (H×W×D):
39.2×774×501 mm


- Same features as GK45TEASC

GK45TEAS.1F

Flush model GK45TEAS.1F/31026

- Appliance dimensions (H×W×D):
43.5×761×501 mm/R5

- Same features as GK45TEASC



GK45TEBS.1C

Stainless-steel trim GK45TEBS.1C/032

- Appliance dimensions (H×W×D):
41.5×584×514 mm

Operating modes and features



- 4 cooking zones (14 cm, 18 cm, 18 to 26 cm, 17/21 cm)
- Back left cooking zone can be switched between Ø 17 and 21 cm
- 1 switchable frying zone (back right), Ø 18 to 26 cm
- Restore function

GK45TEBS.1

Faceted model GK45TEBS.1/032

- Appliance dimensions (H×W×D):
39.2×584×514 mm

- Same features as GK45TEBS.1C

GK45TEBS.2F

Flush model GK45TEBS.2F/31028

- Appliance dimensions (H×W×D):
43×571×501 mm/R5

- Same features as GK45TEBS.1C



GK25TE

Faceted model GK25TE/005

- Appliance dimensions (H×W×D):
39.5×289×514 mm

Operating modes and features



- 2 cooking zones (14 cm, 12/18 cm)
- Back cooking zone can be switched between Ø 12 and 18 cm
- Operating time with cut-off function for both cooking zones, can be switched on at the same time
- Faceted model for overlaid installation

GK25TE.1F

Flush model GK25TE.1F/31023

- Appliance dimensions (H×W×D):
43.5×281×501 mm/R5

- Same features as GK25TE



GK51TPG

Bevelled edge GK51TPG/701

- Appliance dimensions (H × W × D): 57 × 912 × 520 mm
- Cut-out dimensions (W × D): 850 × 490 mm

Operating modes and features



- One-hand ignition
- Flame failure device
- Cast-iron pan supports
- Gas pre-installed (20 mbar)
- TG = natural gas/LPG nozzle
- Power cord: 1 m

Cooking zone power

- Front middle: standard burner, 1.9 kW
- Back middle: economy burner, 1.1 kW
- Back right: high-speed burner, 2.8 kW
- Front right: standard burner, 1.9 kW
- Left: wok burner, 6.0 kW
- Pre-installed: natural Gas G-20 10 mbar
- Nozzle: LPG G30/G31 28-30/37 mbar



GK41TG

Bevelled edge GK41TG/717

- Appliance dimensions (H × W × D): 57 × 602 × 520 mm
- Cut-out dimensions (W × D): 560 × 490 mm

Operating modes and features



- One-hand ignition
- Flame failure device
- Cast-iron pan supports
- Gas pre-installed (20 mbar)
- TG = natural gas/LPG
- Power cord: 1 m

Cooking zone power

- Front left: standard burner, 1.9 kW
- Back left: economy burner, 1.1 kW
- Back right: high-speed burner, 2.8 kW
- Front right: standard burner, 1.9 kW
- Pre-installed: natural Gas G-20 10 mbar
- Nozzle: LPG G30/G31 28-30/37 mbar



GK21TG

Bevelled edge GK21TG/797

- Appliance dimensions (H × W × D): 57 × 302 × 520 mm
- Cut-out dimensions (W × D): 270 × 490 mm

Operating modes and features



- One-hand ignition
- Flame failure device
- Cast-iron pan supports
- Gas pre-installed (20 mbar)
- TG = natural gas/LPG
- Power cord: 1 m, without plug

Cooking zone power

- Front: standard burner, 1.9 kW
- Back: high-speed burner, 2.8 kW

GK21TTG

Bevelled edge GK21TTG/302

- Appliance dimensions (H × W × D): 45 × 302 × 520 mm
- Cut-out dimensions (W × D): 270 × 490 mm

Operating modes and features



- One-hand ignition
- Flame failure device
- Cast-iron pan supports
- Pre-installed: town gas G110 (8 mbar)
- LPG nozzle
- Power cord: 1 m

Cooking zone power

- Front: standard burner, 1.9 kW
- Back: high-speed burner, 2.8 kW



GK11TG

Bevelled edge GK11TG/798

- Appliance dimensions (H × W × D): 57 × 302 × 520 mm
- Cut-out dimensions (W × D): 270 × 490 mm

Operating modes and features



- One-hand ignition
- Flame failure device
- Cast-iron pan support
- Gas pre-installed (20 mbar)
- TG = natural gas/LPG nozzle
- Power cord: 1 m, without plug

Cooking zone power


- Wok burner: 6.0 kW (5.4 kW)
- Nozzle: LPG G30/G31 28-30/37 mbar

GK11TTG

Bevelled edge GK11TTG/851

- Appliance dimensions (H × W × D): 45 × 302 × 520 mm
- Cut-out dimensions (W × D): 270 × 490 mm

Operating modes and features



- One-hand ignition
- Flame failure device
- Cast-iron pan supports
- Pre-installed: town gas G110 (8 mbar)
- LPG nozzle
- Power cord: 1 m

Cooking zone power

- Wok burner: 6.0 kW (5.4 kW)



GK11TKLG

Bevelled edge Lava Grill (electric) GK11TKLG/98A

- Appliance dimensions (H × W × D): 242 × 302 × 520 mm
- Cut-out dimensions (W × D): 270 × 490 mm

Operating modes and features



- 30.2 cm wide cooking area
- 1 large cast-iron grilling surface
- Stainless-steel grilling pan, useable with lava rocks or water
- Water drain tap
- Top-mounted control knobs
- Power-on indicator light
- Lava rocks included in delivery



GK21TI

Bevelled edge Design fits to gas edition GK21TI/834


- Appliance dimensions (H × W × D): 57 × 302 × 520 mm
- Cut-out dimensions (W × D): 270 × 490 mm

Operating modes and features



- 30 cm wide cooking area
- 2 induction cooking zones (14.5 cm, 21 cm)
- PowerPlus on all zones
- Very rapid heating times
- Automatic boost
- Direct selection with knobs

Ceiling hoods
Island hoods
Wall hoods
Range hoods

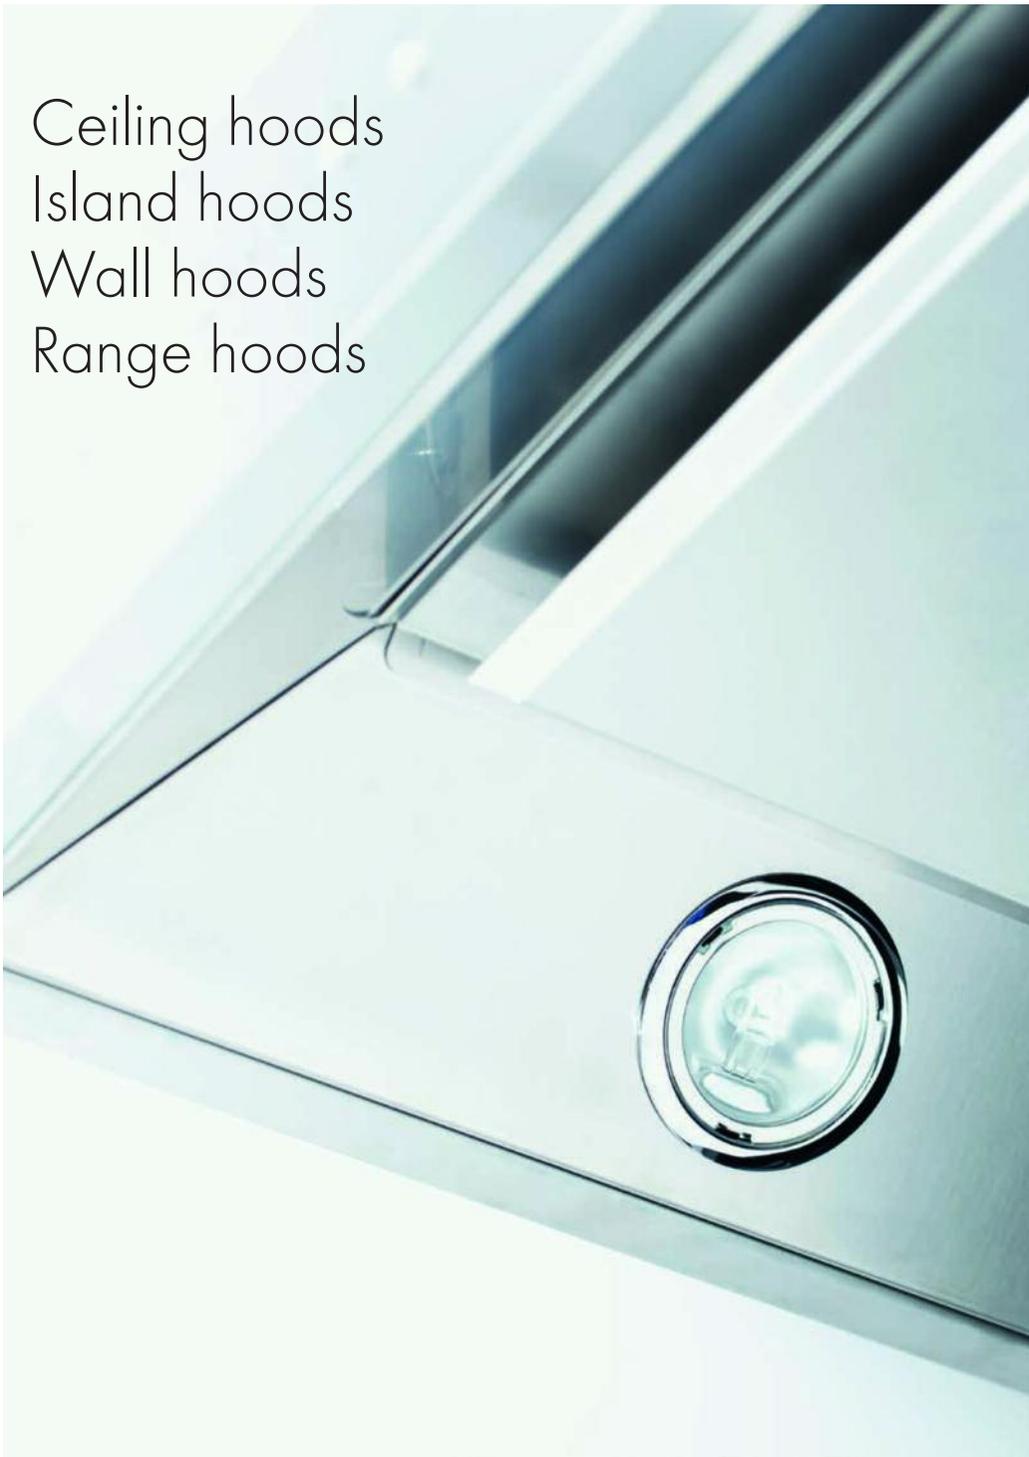

V-ZUG appliances not only look remarkably elegant, they are also incredibly practical. Our innovative design hoods are excellent examples of how we always combine function and design. The new **Premira island hood** with a glass front fits all modern kitchen designs. Whether as extraction or recirculation model, our range hoods are

available in various widths. The Premira hoods offer a high-performance motor, numerous power levels and a high degree of grease separation. For the recirculation model, 5 kg packages of activated charcoal are available. These guarantee maintenance-free operation of up to five years.



NEW CEILING HOOD

In modern kitchen designs, the island often represents the crossover between the kitchen and living area. An island hood can be a real visual highlight, but does restrict visibility into the living area in open-plan spaces. By contrast, a ceiling hood creates more space. These are perfect for modern, elegant kitchens.



THE PREMIRA RANGE

The many advantages of the Premira hoods:

- Built-in hood for concealed installation
- 120 cm wide built-in hood
- Wall and island hoods with flat design (front height of only 55 mm)
- Wall and island hoods with glass front available
- Simple installation
- Low overall hood height
- Economical LED lighting
- Economical BLDC motors
- Quiet operation
- Top recirculation solutions: for up to five years, no replacement of the activated charcoal is needed



Leave the cleaning to the dishwasher

All Adora dishwashers provide enough space for the grease filters. This makes maintenance much easier, because filters need to be cleaned regularly to maintain their effectiveness.

PRODUCT COMPARISON: CEILING, ISLAND AND WALL HOODS


	DSDSRVZ	DI Premira (PUG)	DI Premira (PQ)	DI B	DI SE	DW Forano	DW Premira (PUG)	DW VHR	DW B	DW Premira (PQ)	DW VHR	DW SE	
Brochure page	84	84	85	85	85	86	86	86	87	87	87	88	
Versions													
Stainless steel	✓		✓	✓	✓				✓	✓		✓	
Stainless steel/glass	✓	✓					✓						
Black glass						✓		✓			✓		
Glass front			✓							✓			
140 cm width				✓					✓				
130 cm width			✓										
120 cm width	✓	✓		✓	✓		✓		✓	✓		✓	
100 cm width		✓	✓	✓	✓								
90 cm width							✓	✓	✓	✓	✓	✓	
80 cm width						✓							
70 cm width												✓	
60 cm width												✓	
Extraction	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Recirculation with standard activated charcoal filter					✓						✓	✓	
Recirculation with long-life activated charcoal filter				✓	✓	✓		✓	✓			✓	
Recirculation with 5 kg activated charcoal		✓	✓				✓			✓			
Recirculation with 2.5 kg activated charcoal		✓	✓				✓			✓			
Uses													
Perimeter extraction	✓	✓					✓				✓		
LED lighting	✓	✓	✓				✓	✓		✓	✓		
Halogen lamps				✓	✓	✓			✓			✓	
Colour temperature	K	3000	3000	3000	2800	2800	2800	3000	3000	2800	3000	2700	2800
Number of grease filters		4	7/8	3/4	1/2	3	4	6/8	2	1/2	3/4	2	3/4
Automatic after-running function	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Intensive level	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Grease filter cleaning indicator	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Dimmable light	✓			✓		✓		✓	✓				
Connection for structural ventilation/extraction flap		✓	✓	✓	✓		✓		✓	✓		✓	
Connection for window contact switch		✓	✓	✓			✓		✓	✓			
Operation and display													
Sliding switch													
Number of power levels	4	4	4	4	4	4	4	4	4	4	4	4	
Fan-speed display	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	



DSDSR12 Ceiling hood
Glass (white) DSDSR12g/64003



DSDSR12 Ceiling hood
Stainless steel DSDSR12c/64003



DI Premira DI PQG 10
Stainless steel DIPQG10c/63004

DI Premira DI PQG 12
Stainless steel DIPQG12c/63005



DI Premira DI PQ 10
Glass DIPQ10g/63007
Stainless steel DIPQ10c/63007


DI Premira DI PQ 13
Glass DIPQ13g/63006
Stainless steel DIPQ13c/63006



DI B DI B10
Stainless steel DIB10c/816

DI B DI B12
Stainless steel DIB12c/63008

DI B DI B14
Stainless steel DIB14c/821




DI SE10
Stainless steel DISE10/076

DI SE12
Stainless steel DISE12/077

Front design

Glass
- Appliance dimensions excluding chimney
(front height × W × D):
133 × 1200 × 700 mm
Appliance height: 318 mm (extraction)

Operating modes and features



Performance and effectiveness

- 4 metal grease filters
- Economical BLDC motor
- Economical LEDs
- LED with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe

Special features

- Clean Air function

Extras for version with external motor


Construction kit

For details, see kitchen planning aid

Front design

S
- Appliance dimensions excluding chimney
(front height × W × D):
133 × 1200 × 700 mm
Appliance height: 318 mm (extraction)

Operating modes and features



Performance and effectiveness

- 4 metal grease filters
- Economical BLDC motor
- Economical LEDs
- LED with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe

Special features

- Clean Air function

Extras for version with external motor

Construction kit

For details, see kitchen planning aid

Front design

S
- Appliance dimensions excluding chimney
(front height × W × D):
70 × 1000/1200 × 700 mm
Appliance height including chimney:
490 to 1320 mm (extraction)
580 to 1425 mm (recirculation)

Operating modes and features



Performance and effectiveness

- 7 or 8 metal grease filters
- Economical BLDC motor
- Economical LEDs
- LED with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe

Extras for circulation mode


Package with 5 kg activated charcoal
Maintenance-free for approx. 5 years
Overall hood height: 665 to 1425 mm

Package with 2.5 kg activated charcoal
Maintenance-free for approx. 3 years
Overall hood height: 580 to 660 mm

Front design

S Glass
- Appliance dimensions excluding chimney
(front height × W × D):
55 × 1000/1300 × 700 mm
Appliance height including chimney:
475 to 1305 mm (extraction)
565 to 1410 mm (recirculation)

Operating modes and features



Performance and effectiveness

- 3 or 4 metal grease filters
- Economical BLDC motor
- Economical LEDs
- LED with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe

Extras for circulation mode


Package with 5 kg activated charcoal
Maintenance-free for approx. 5 years
Overall hood height: 650 to 1410 mm

Package with 2.5 kg activated charcoal
Maintenance-free for approx. 3 years
Overall hood height: 565 to 645 mm

Front design

S Glass
- Appliance dimensions excluding chimney
(front height × W × D):
68/80 × 1000/1400 × 700 mm
Appliance height including chimney:
550 to 1250 mm (extraction)
600 to 1250 mm (recirculation)

Operating modes and features



Performance and effectiveness

- 1 metal grease filter

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe
- Optional connection for structural ventilation/extraction flap
- Connection for window contact switch
- Clean Air function

Extras for circulation mode

Recirculation casing with long-life activated charcoal filter

Front design

S
- Appliance dimensions excluding chimney
(front height × W × D):
60 × 1000/1200 × 600 mm
Appliance height including chimney:
550 to 1265 mm (extraction)
650 to 1340 mm (recirculation)

Operating modes and features



Performance and effectiveness

- 3 metal grease filters

Operation and maintenance


- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe
- Easy to operate and clean
- Optional connection for structural ventilation/extraction flap

Extras for circulation mode

Recirculation casing
Standard activated charcoal filter
Long-life activated charcoal filter



DW Forano DW F8
Black glass DWF8g/042



DW Premira DW PQG 9
Stainless steel DWPQG9c/62004

DW Premira DW PQG 12
Stainless steel DWPQG12c/62005



DW VHR9
Glass DWWHR9g/62010



DW B DW B9
Stainless steel DWB9c/993

DW B DW B12
Stainless steel DWB12c/62008

DW B DW B14
Stainless steel DWB14c/994



DW Premira DW PQ 9
Glass DWPQ9g/62007
Stainless steel DWPQ9c/62007

DW Premira DW PQ 12
Glass DWPQ12g/62006
Stainless steel DWPQ12c/62006



DW VMR9
Glass DWVMR9g/62009

Front design

G

- Appliance dimensions excluding chimney (front height × W × D): 470 × 800 × 273 mm
- Appliance height including chimney: 740 to 1274 mm (extraction) 1024 to 1374 mm (recirculation)

Operating modes and features



Performance and effectiveness

- 4 metal grease filters

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe

Special features

- Automatic opening of the range hood
- Clean Air function

Extras for circulation mode

Long-life activated charcoal filter

Front design

S

- Appliance dimensions excluding chimney (front height × W × D): 70 × 900/1200 × 550 mm
- Appliance height including chimney: 475 to 1320 mm (extraction) 665 to 1440 mm (recirculation)

Operating modes and features



Performance and effectiveness

- 3 or 4 metal grease filters
- Economical BLDC motor
- Economical LEDs
- LED with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe

Extras for circulation mode

Package with 5 kg activated charcoal
Maintenance-free for approx. 5 years
Overall hood height: 665 to 1410 mm

Package with 2.5 kg activated charcoal
Maintenance-free for approx. 3 years
Overall hood height: 580 to 660 mm

Front design

S

- Appliance dimensions excluding chimney (front height × W × D): 380 × 898 × 339 mm
- Appliance height including chimney: 805 to 1435 mm (extraction) 463 mm (recirculation, no chimney)

Operating modes and features



Performance and effectiveness

- 2 metal grease filters
- Economical BLDC motor
- Economical LEDs
- LED with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe

Special features

- Clean Air function

Extras for circulation mode

Long-life activated charcoal filter

Front design

S

- Appliance dimensions excluding chimney (front height × W × D): 68/80 × 900/1400 × 550 mm
- Appliance height including chimney: 500 to 1150 mm (extraction) 600 to 1150 mm (recirculation)

Operating modes and features



Performance and effectiveness

- 1 or 2 metal grease filters

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe
- Optional connection for structural ventilation/extraction flap
- Connection for window contact switch
- Clean Air function

Extras for circulation mode

Recirculation casing with long-life activated charcoal filter

Front design

S Glass

- Appliance dimensions excluding chimney (front height × W × D): 55 × 900/1200 × 550 mm
- Appliance height including chimney: 460 to 1305 mm (extraction) 565 to 1425 mm (recirculation)

Operating modes and features



Performance and effectiveness

- 3 or 4 metal grease filters
- Economical BLDC motor
- Economical LEDs
- LED with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe

Extras for circulation mode

Package with 5 kg activated charcoal
Maintenance-free for approx. 5 years
Overall hood height: 650 to 1425 mm

Package with 2.5 kg activated charcoal
Maintenance-free for approx. 3 years
Overall hood height: 565 to 645 mm

Front design

S Glass

- Appliance dimensions excluding chimney (front height × W × D): 512 × 898 × 324 mm
- Appliance height including chimney: 1045 to 1465 mm (extraction) 515 mm (recirculation, no chimney)

Operating modes and features



Performance and effectiveness

- 2 metal grease filters
- Economical BLDC motor
- LED with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe

Extras for circulation mode

Standard activated charcoal filter



DW SE9

Stainless steel DWSE9c/059

DW SE12

Stainless steel DWSE12c/068

Front design



- Appliance dimensions excluding chimney (front height × W × D): 60 × 598/698/898/1198 × 477 mm
- Appliance height including chimney: 615 to 1125 mm (extraction) 700 to 1145 mm (recirculation)

Operating modes and features



Performance and effectiveness

- 2, 3 or 4 metal grease filters

Operation and maintenance

- 4 power levels
- Fan-speed display
- Easy to operate and clean
- Grease filter is dishwasher-safe
- Optional connection for structural ventilation/extraction flap

Extras for circulation mode

Recirculation casing
Standard activated charcoal filter
Long-life activated charcoal filter

PRODUCT COMPARISON: BUILT-IN RANGE HOODS AND HOOD FANS

	DF PQ	DF PQSL	DEHMR	DHL	DF SLG	DEHE
Brochure page	90	90	90	91	91	91
Versions						
Stainless steel		✓	✓	✓	✓	✓
Glass front		✓				
With glass deflector plate	✓				✓	
120 cm width	✓					
110 cm width				✓		
90 cm width	✓	✓			✓	
86 cm width			✓			
82.5 cm width						
80 cm width				✓		
77 cm width			✓			
70 cm width						✓
60 cm width	✓	✓			✓	
52 cm width			✓			✓
Extraction	✓	✓	✓	✓	✓	✓
Recirculation with standard activated charcoal filter					✓	✓
Recirculation with long-life activated charcoal filter			✓	✓	✓	
Recirculation with 5 kg activated charcoal	✓	✓				
Recirculation with 2.5 kg activated charcoal	✓	✓				
Uses						
Perimeter extraction		✓	✓	✓		
LED lighting	✓	✓	✓	✓		
Halogen lamps					✓	✓
Colour temperature	K 3000	3000	3000	4200	2800	2800
Number of grease filters	2/3/4	2/4	1/2	1	1	2
Automatic after-running function	✓	✓	✓		✓	
Grease filter cleaning indicator	✓	✓	✓	✓	✓	
Connection for structural ventilation/extraction flap	✓	✓				
Connection for window contact switch	✓	✓				
Operation and display						
Sliding switch						✓
Number of power levels	4	4	4		4	3
Fan-speed display	✓	✓	✓		✓	✓




DF Premira	DF PQ 6
Stainless steel	DFPQ6c/61015
DF Premira	DF PQ 9
Stainless steel	DFPW9c/61014
DF Premira	DF PQ 12
Stainless steel	DFPW12c/61013

Front design



- Appliance dimensions (front height × W × D): 55 × 598/898/1198 × 495 mm

Operating modes and features



Performance and effectiveness

- 2, 3 or 4 metal grease filters
- Economical BLDC motor
- Economical LEDs with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe
- Quick start

Special features

- Power levels can be adjusted on glass canopy

Extras for circulation mode

- Package with 5 kg activated charcoal
Maintenance-free for approx. 5 years
- Package with 2.5 kg activated charcoal
Maintenance-free for approx. 3 years




DF Premira SL	DF PQSL 6
Stainless steel	DFPQSL6c/61008
DF Premira SL	DF PQSL 9
Stainless steel	DFPQSL9c/61007
Glass	DFPQSL9g/61007

Front design



- Appliance dimensions (front height × W × D): 25 × 598/898 × 495 mm

Operating modes and features



Performance and effectiveness

- 2 or 4 metal grease filters
- Economical BLDC motor
- Economical LEDs with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Fan-speed display
- Grease filter is dishwasher-safe
- Quick start

Special features

- Power levels can be adjusted on deflector plate

Extras for circulation mode

- Package with 5 kg activated charcoal
Maintenance-free for approx. 5 years
- Package with 2.5 kg activated charcoal
Maintenance-free for approx. 3 years




DEHMR5*	
Stainless steel	DEHMR5c/61023
DEHMR7*	
Stainless steel	DEHMR7c/61024
DEHMR8	
Stainless steel	DEHMR8c/61025

Front design



- Hood fan for concealed installation in wall unit
- Appliance dimensions (front height × W × D): 330 × 520/770/860 × 300 mm

Operating modes and features



Performance and effectiveness

- 1 or 2 metal grease filters
- Economical LEDs with warm light, 3000 K

Operation and maintenance

- 4 power levels
- Easy to operate and clean
- Grease filter is dishwasher-safe
- Adapter (Ø 150 to 125 mm) supplied free of charge

Special features

- Clean Air function

* Power: 640 m³/h, energy efficiency: B.

Extras for circulation mode

- Long-life activated charcoal filter




DH L8	
Stainless steel	DHL8/64001
DH L11	
Stainless steel	DHL11/64002

Front design

- Hood fan for concealed installation in wall unit
- Appliance dimensions (front height × W × D): 300 × 800/1100 × 300 mm

Operating modes and features



Performance and effectiveness

- 1 metal grease filter
- Optimum cooking-zone illumination
- Economical LEDs, 4200 K

Operation and maintenance

- Controls on the appliance
- 4 power levels

Special features

- Very good cooking-vapour capture thanks to folding glass plate



DF SLG6	
Stainless steel	DFSLG6/384
DF SLG9	
Stainless steel	DFSLG9/385

Front design



- Width-adjustable curved deflector plate with aluminium handle
- Appliance dimensions (front height × W × D): 16 × 595/895 × 525 mm

Operating modes and features



Performance and effectiveness

- 1 metal grease filter

Operation and maintenance

- 4 power levels
- Controls outside area affected by grease and humidity
- Quick start
- Easy to operate and clean
- Grease filter is dishwasher-safe
- Adapter (Ø 150 to 125 mm) supplied free of charge

Extras for circulation mode

- Standard activated charcoal filter
- Long-life activated charcoal filter



DEHE5	
Stainless steel	DEHE5/61021
DEHE7	
Stainless steel	DEHE7/61022

Front design



- Hood fan for concealed installation in wall unit
- Appliance dimensions (front height × W × D): 310 × 522/702 × 284 mm

Operating modes and features



Performance and effectiveness

- 1 metal grease filter


Operation and maintenance

- 4 power levels
- Easy to operate and clean
- Grease filter is dishwasher-safe
- Adapter (Ø 150 to 125 mm) supplied free of charge

Extras for circulation mode

- Standard activated charcoal filter

Dishwashers

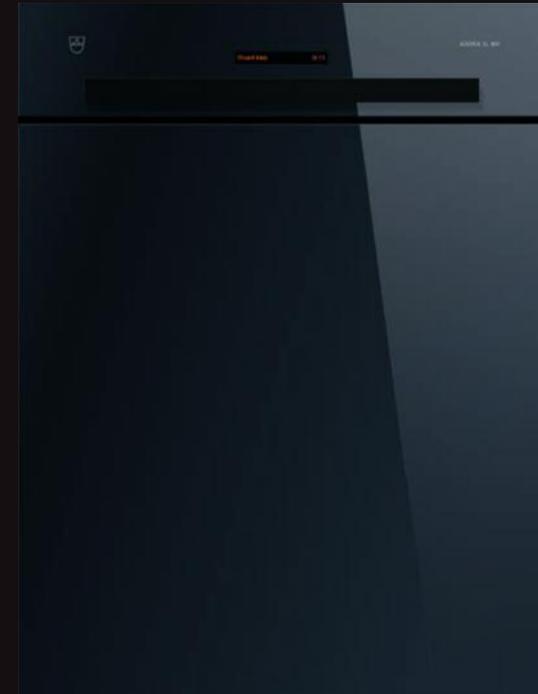

Washing up with an Adora saves not only time but also lots of water compared to washing up by hand. V-ZUG is the only company to develop and manufacture dishwashers in Switzerland. Not only are Adora dishwashers the only ones in the world to feature SteamFinish, they also have a comprehensive range of programmes such as Sprint, Fondue/Raclette and a special programme for

glasses. At the same time, they are also very easy to use, thanks to, for example, the convenient cutlery drawer and the automatic door opener for optimum drying. In addition, the **Adora SL WP** is the world's first dishwasher with heat-pump technology, thus setting new standards in terms of resource consumption.



STEAMFINISH – PURE STEAM FOR A SPARKLING SHINE

The Adora dishwashers from V-ZUG feature unique programmes to guarantee sparkling clean dishes every time. Perfect results are achieved quickly, quietly and economically. However, Adora also stands for modern design and elegance in individual versions.

Developed and manufactured in Switzerland: experience sparkling results with SteamFinish.



Tested and confirmed by: **Labor Veritas**

WORLD'S FIRST DISHWASHER WITH HEAT-PUMP TECHNOLOGY



The Adora SL WP dishwasher combines tried-and-tested technology with an innovative way to produce heat. V-ZUG Ltd is the first manufacturer to integrate a highly efficient heat pump into a dishwasher. This reduces electricity consumption by nearly half compared to conventional dishwashers.

Developed and manufactured in Switzerland: experience the energy-saving dishwashers from V-ZUG.



 **Sparkling clean in just 19 minutes**
When you need quick results, for example at a party, the sprint programme on the Adora SL WP takes just 22 minutes, or 19 minutes on the SL, depending on the electrical connection.

CONVENIENCE REDEFINED – ERGOPLUS CUTLERY DRAWER

The new drawer developed by V-ZUG offers an ergonomic way to put cutlery in the machine in a structured compartment. This means that the individual pieces do not touch, thus helping to ensure that the cutlery is completely clean and preventing any scratches. "Plus" stands for 14 place settings, which represent optimum use of the extra height dishwasher. The further benefits of the new drawer are the height-adjustable wing elements to the left and right, as well as the removable wing element that provides space for long-stemmed glasses.



AMAZING EQUIPMENT



4 LED interior lighting

No need to turn on the kitchen light just to put a glass in the dishwasher – the new pleasant LED interior lighting installed in the SL model means this is no longer necessary. Four LED lamps in the interior make it easier to fill and empty the dishwasher.



AUTO Automatic door opener

With the door opener, the door is automatically opened approximately 100 mm following the wash programme. This helps to cut the drying time, particularly for plastic containers. The door opener also saves valuable energy and is automatic, so it even works if the dishwasher starts overnight.

CONVENIENT, SPACIOUS BASKETS

The Adora not only offers the largest washing compartment, it also provides an excellent selection of baskets, inserts and fittings which can be combined in various ways.



Generous measurements

The washing compartment has been made bigger in the 60 cm wide dishwasher. The new V-ZUG extra height Euro dishwashers with cutlery drawer can take up to 160 items of crockery, cutlery and glasses. This corresponds to 14 standard place settings.



Height-adjustable

Even when loaded, the top basket can be moved into seven different positions in just one simple step. This means, for example, you can put large plates underneath and tall glasses on top.




Vario cutlery basket insert

Items of cutlery such as ladles, wooden spoons, whisks, spatulas and long meat knives can be placed in the Vario cutlery basket insert.

The extra height dishwashers have amazing amounts of space

These jumbo dishwashers have 6.5 cm more height in the washing compartment. Plates with a diameter of up to 33 cm can fit in the bottom basket and glasses of up to 27.5 mm in the top basket.

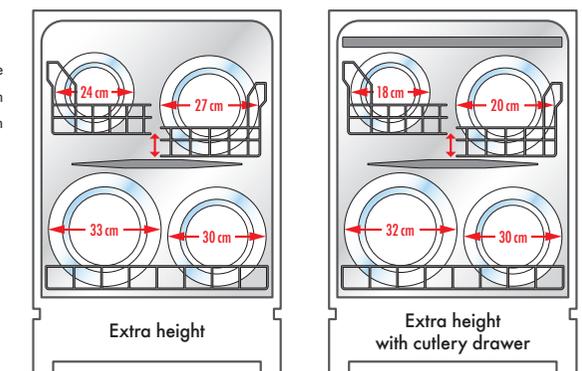

PRODUCT COMPARISON: DISHWASHERS

	Adora SL WP	Adora SL	Adora S	Adora N
Brochure page	99/101	99/101	100/102/103	100/102/103
Versions				
Extra height		✓	✓	✓
Fully integratable	✓	✓	✓	✓
Black glass	✓	✓	✓	✓
Stainless steel			✓	✓
Black design			✓	✓
Features				
Energy efficiency	A+++/-40%	A+++/-10%	A+++/-10%	A+
Heat pump	✓			
ergoPlus cutlery drawer		-/✓		
LED interior lighting	✓	✓		
Automatic door opener	✓	✓	✓	
Unique V-ZUG innovations				
Sprint programme* min.	22	19		
Intelligent four-way sensor system	✓	✓		
Limescale sensor	✓	✓	✓	
SteamFinish	✓	✓		
Daily Quick programme	✓	✓		
Height-adjustable top basket	✓	✓	✓	✓
Uses				
Number of place settings	13	13/14	13	13
Simple installation in tall unit	✓	✓	✓	✓
Number of programmes	10	10	8	5
All-in-one option	✓	✓	✓	✓
Hygiene programme	✓	✓	✓	
Childproof lock	✓	✓	✓	
Operation and display				
Delayed start	✓	✓	✓	✓
Plain text display (15 languages)	✓	✓		
7-segment display			✓	
Appliance height				
Standard mm	867-907	780-896	780-896	780-896
Extra height mm		845-961	845-961	845-961

* Depending on the electrical connection.

For accessories, see page 103



Adora 60 SLWP di

Standard GS60SLZWPdi/41009

The first with
heat-pump technology

Front design



- Black design/chrome designer handle
- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level

From 6 l/0.49 kWh/46 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - Row of folding pins
 - 4 folding glass supports
 - Vario cutlery basket insert
 - Small cutlery basket
- Lower rack features
 - 4 rows of folding pins
 - MultiFlex zone
 - Large cutlery basket
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection



Adora 60 SL di with cutlery drawer

Extra height GS60SLZGdiB/41042

Front design



- Black design/chrome designer handle
- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level

From 5 l/0.8 kWh/42 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - Row of folding pins
 - 4 folding glass supports
 - Small cutlery basket
- Lower rack features
 - 4 rows of folding pins
 - MultiFlex zone
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection



Adora 60 SL di

Standard GS60SLZdi/41005
Extra height GS60SLZGdi/41007

Front design



- Black design/chrome designer handle
- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level

From 5 l/0.7 kWh/42 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - Row of folding pins
 - 4 folding glass supports
 - Vario cutlery basket insert
 - Small cutlery basket
- Lower rack features
 - 4 rows of folding pins
 - MultiFlex zone
 - Large cutlery basket
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection



Adora 60 S di

Standard GS60SZdi/41010
Extra height GS60SZGdi/41037

Front design



- Black design/chrome designer handle
- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level
From 7 l/0.73 kWh/44 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - Row of folding pins
 - 4 folding glass supports
 - Small cutlery basket
- Lower rack features
 - 4 rows of folding pins
 - MultiFlex zone
 - Large cutlery basket
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection



Adora 60 N di

Standard GS60NZdi/41011

Front design



- Black design/chrome designer handle
- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level
From 9.2 l/0.99 kWh/44 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - 2 folding glass supports
- Lower rack features
 - Large cutlery basket
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection

For accessories, see page 103



Adora 60 SLWP Vi

Standard GS60SLZWPVi/41038

Front design



- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level
From 6 l/0.49 kWh/46 dB(A)
(Eco programme)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - Row of folding pins
 - 4 folding glass supports
 - Vario cutlery basket insert
 - Small cutlery basket
- Lower rack features
 - 4 rows of folding pins
 - MultiFlex zone
 - Large cutlery basket
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection

For accessories, see page 103



Adora 60 SL Vi with cutlery drawer

Extra height GS60SLZGVIB/41043

Front design



- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level
From 5 l/0.8 kWh/40 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - Row of folding pins
 - 4 folding glass supports
 - Small cutlery basket
- Lower rack features
 - 4 rows of folding pins
 - MultiFlex zone
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection



Adora 60 SL Vi

Standard GS60SLZVi/41006
Extra height GS60SLZGV/41008

Front design



- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level
From 5 l/0.7 kWh/40 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - Row of folding pins
 - 4 folding glass supports
 - Vario cutlery basket insert
 - Small cutlery basket
- Lower rack features
 - 4 rows of folding pins
 - MultiFlex zone
 - Large cutlery basket
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection

FULLY INTEGRATED



Adora 60 S Vi

Standard GS60SZVi/41035
Extra height GS60SZGVi/41036

Front design



- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level
From 7 l/0.73 kWh/43 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - Row of folding pins
 - 4 folding glass supports
 - Small cutlery basket
- Lower rack features
 - 4 rows of folding pins
 - MultiFlex zone
 - Large cutlery basket
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection

Adora 60 N Vi

Standard GS60NZVi/41030
Extra height GS60NZGVi/41032

Front design



- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level
From 9.2 l/0.99 kWh/44 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - 2 folding glass supports
- Lower rack features
 - Large cutlery basket
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection



Adora 60 Si

Standard GS60SZi/41034
Extra height GS60SZGi/41016

Front design



- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level
From 7 l/0.73 kWh/44 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - Row of folding pins
 - 4 folding glass supports
 - Small cutlery basket
- Lower rack features
 - 4 rows of folding pins
 - MultiFlex zone
 - Large cutlery basket
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection

Adora 60 Ni

Standard GS60NZi/41029

Front design



- For appliance dimensions, see page 98

Programmes and features



Water/electricity consumption/noise level
From 9.2 l/0.99 kWh/44 dB(A)



Additional features

- Special hot-water connection function
- LED indicating salt/shine agent top-up
- Upper rack features
 - 3 racks
 - Additional row for glasses
 - 2 folding glass supports
- Lower rack features
 - Large cutlery basket
 - Basket handle
- Easy pin extensions

Safety systems

- Leak protection

Accessories for dishwashers

Adora 60 SL di/Sdi/Ndi

- Stainless steel front design
 - Height: 632 mm
 - Height: 697 mm
- Black glass front design
 - Height: 632 mm
 - Height: 697 mm
- Cup rack in bottom basket (space for 18 cups)
- Vario cutlery basket insert

Adora 60 SL Vi/S Vi/N Vi

- Cup rack in bottom basket (space for 18 cups)
- Vario cutlery basket insert

Adora 60 Si/Ni

- Stainless steel front design
 - Height: 632 mm
 - Height: 697 mm
- Cup rack in bottom basket (space for 18 cups)
- Vario cutlery basket insert

Refrigerators



V-ZUG refrigerators are the only ones to be developed and produced in Switzerland. The production site in Arbon on Lake Constance is continuously being modernised to ensure that Swiss cutting-edge technology is just as sensational when it comes to refrigerators. The new **Prestige P 60i eco** combines impressive quality with a large usable capacity of 276 l. The Prestige P 60i eco

saves an amazing 30% energy compared to its predecessor. With annual energy consumption of just 154 kWh, this refrigerator uses less energy than an 18 W energy-saving bulb. There are no compromises when it comes to design either. The impressive features are underlined by the use of stainless steel.



High-quality, innovative design

This new, elegant and purist design in brushed stainless steel makes the Prestige P 60i eco refrigerator a real design icon in the kitchen.

EVEN BETTER STORAGE IN MULTI-ZONE APPLIANCES

Multi-zone appliances not only have a traditional cooling area and a freezing compartment, they also have an additional cold storage compartment and/or a cellar compartment. These additional temperature zones allow foods to be stored even better so they keep fresh for longer.



FreshControl zone

The FreshControl zone is based on professional cooling technology with the temperature controlled exactly to approximately 0.5°C to meet the most exacting of requirements. The humidity in the drawers can also be adjusted. Meat, fish, poultry and sausages keep fresh longer with lower humidity and vegetables, salad, herbs and fruit at higher humidity.



The cellar compartment: ideal for beverages as well as foods which are sensitive to cold

With its mild temperature of 8°C to 12°C, the cellar compartment is the perfect place to store foods that are sensitive to the cold, such as potatoes and exotic fruit. Drinks are chilled to a pleasant drinking temperature. The bottle drawer on rails is particularly handy. It contains a removable drinks basket which fits six bottles.



HygienePlus – a new era for hygiene

Thanks to innovative types of plastic, you will now benefit from improved hygiene in your refrigerator. The growth and spread of harmful micro-organisms on the surfaces of the inner walls and refrigerator door is greatly reduced. This means that the development of unpleasant odours is also prevented.

REFRIGERATION TECHNOLOGY FROM V-ZUG – EXPERIENCE MARKET FRESHNESS

V-ZUG refrigerators provide ideal storage conditions for a wide range of different foods. Valuable nutrients and food quality are preserved for significantly longer. All models have outstanding energy figures, feature clever innovations and are impressively easy to use.

Arbon development and production site

We develop and manufacture the most modern refrigerators for both the local and international markets at our Arbon site, which has a floor area of around 22,000 square metres. Refrigeration equipment has been made at this site for over 60 years. The knowledge that comes from this experience is incorporated into new developments, guaranteeing innovative product solutions and the very best quality. The vast majority of our refrigerator portfolio is manufactured in Switzerland.

EASE OF USE FOR DISCERNING USERS

Sophisticated electronics make for ease of use, excellent convenience and a clear overview of the temperature set and the functions activated.



Separate temperature control



Temperature setting accurate to the degree and digital display



TouchControl operation



Additional functions can be activated and deactivated as required.

Quick cooling/quick freezing function

Foods are chilled quickly and gently, as soon as they are placed in the refrigeration or freezing compartment.

Holiday function

On appliances with a separate cooling function, the refrigerator section can be deactivated using the holiday function. This is recommended for extended periods of absence and saves even more energy. The freezer section continues to operate as normal.

Sabbath mode

"Deep sleep" for the refrigerator: the LED lighting and the display fields are deactivated for 28 hours.



Smart-rack system: the clever fixing system means no shelves are required

The smart-rack system makes adjusting the racks and removing them for cleaning quick and easy. The racks simply click into strips on the side walls. The system guarantees a firm hold and also allows the full width of the rack to be used.



Plenty of space, even for big things

The short racks and splittable racks provide plenty of space for very tall containers.



SoftClose – gentle, safe door closing

The new door-closing system increases user-friendliness even further. However forcefully you close the door, the movement is braked and the door closes gently and quietly. Fully integrated models are fitted with this function.

PERFECT LIGHTING AND EXCLUSIVE SHELF FOR STEAMER ACCESSORIES

The new, exclusive shelf and the steamer accessories mean the refrigerator can provide perfect support for complex recipes. The pull-out accessories also provide added benefits for everyday use.

Excellent light distribution in all temperature zones thanks to LED lights

A modern lighting system with quality LEDs distributes light perfectly all around the refrigerator, even when it is packed full. This applies not only to the main cooling compartment, but also to the FreshControl zones, the cellar compartment and the separate freezer compartment.



Loading – cooling – preparing

Complicated recipes with long preparation times highlight the importance of good organisation in the kitchen. The new, exclusive shelf and the steamer accessories mean the refrigerator can be used to cool foods that have already been prepared before the next stage of the process (e.g. baking, steaming). The benefits of the refrigerator are used and all remains calm in the kitchen.

The new shelf and the steamer accessories fit in the following refrigerators:

- Prestige P 60i eco (model 51052)
- Prestige 60i eco (model 51045)
- Futura 60i eco (model 51061)



Glass rack with shelf

For Gastronorm containers:
Trim panel, white plastic
Trim panel, brushed stainless steel



Unperforated plastic container, ½ GN Height: 65 mm



Unperforated stainless-steel cooking tray, ½ GN

Height: 40 mm
Height: 65 mm



White porcelain dish, ½ GN Height: 65 mm

Legend for Gastronorm (GN) dimensions
½ GN: 325 × 265 mm (W × D)

PRODUCT COMPARISON: REFRIGERATORS

		Cooltronic 60i	Noblesse 60i	Prestige P 60i eco	Prestige 60i eco	Prestige 60i	Magnum 60i eco	Future 60i eco	Future 60i	Royal 60i	De Luxe 60i eco	De Luxe 60i	Komfort 60i	Wineorder SL60
Brochure page		111	111	112	112	112	113	114	114	114	115	115	115	117

Versions

Installation height	cm	177.8	177.8	177.8	177.8	177.8	177.8	152.4	152.4	152.4	152.4	152.4	82-89	87.4-88
1-door							✓			✓	✓	✓	✓	✓
2-door		✓	✓	✓	✓	✓		✓	✓					
Door stop		R	R	R	R	L/R	L/R	R	R	R	R	R	R	R
Fully integrable		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	
Black glass														✓
Usable capacity, total	l	262	312	276	276	303	296	225	252	256	281	281	126	149
Freezer compartment	l	48	68	73	73	71	32	72	71	24	24	24	18	
Energy efficiency class		A++	A++	A+++	A+++	A++	A+++	A+++	A++	A++	A+++	A++	A++	A

Unique V-ZUG innovations

FreshControl zone		✓												
Cellar compartment			✓							✓	✓	✓		
Wine climate zone														✓

Uses

LED lights		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Splittable racks or short racks		✓	✓	✓	✓	✓	✓	✓	✓				✓	
Bottle drawer			✓							✓	✓	✓		

Operation and display

Separate temperature control		✓	✓	✓	✓	✓								✓
Digital display		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
TouchControl		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		
Quick cooling and/or quick freezing		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
Holiday function		✓	✓	✓	✓	✓								
Sabbath mode				✓	✓		✓	✓			✓	✓		
SoftClose		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
HygienePlus		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓

**Cooltronic 60i**

Fully integrable KC60i/51029

Appliance information

- Appliance dimensions (H x W x D): 1776 x 548 x 545 mm



- 0.24 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 262 l
- Fridge compartment: 214 l, of which FreshControl zone: 39 l
- Freezer compartment: 48 l

Fridge compartment features

- 4 Smart glass shelves, of which 2 height-adjustable and 1 short shelf
- 1 large fruit and vegetable tray
- 4 spacious door trays
- 2 egg holders for 12 eggs

Freezer compartment features

- 2 drawers
- 1 ice cube tray

Accessories

- Berry tray

**Noblesse 60i**

Fully integrable KN60i/51028

Appliance information

- Appliance dimensions (H x W x D): 1776 x 548 x 545 mm



- 0.19 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 312 l
- Fridge compartment: 244 l
- Freezer compartment: 68 l

Fridge compartment features

- 5 Smart glass shelves, of which 2 height-adjustable and 1 short shelf
- 1 spacious vegetable tray
- 4 spacious door trays
- 2 egg holders for 12 eggs

Freezer compartment features

- 2 support wire shelves
- 1 ice cube tray
- 2 internal door compartments



Prestige P 60i eco

Fully integrable KPRP60i/51052eco

Appliance information



- Appliance dimensions (H × W × D): 1776 × 548 × 545 mm



- 0.15 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 276 l
- Fridge compartment: 203 l
- Freezer compartment: 73 l

Fridge compartment features

- 5 Smart glass shelves, of which 3 height-adjustable and 1 short shelf
- 1 spacious vegetable tray
- 5 spacious door trays
- 2 egg holders for 12 eggs

Freezer compartment features

- 3 drawers
- 1 ice cube tray

Accessories

- Berry tray
- For shelf and steamer accessories, see page 109



Prestige 60i eco

Fully integrable KPR60i/51045eco

Appliance information



- Appliance dimensions (H × W × D): 1776 × 548 × 545 mm



- 0.15 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 276 l
- Fridge compartment: 203 l
- Freezer compartment: 73 l

Fridge compartment features

- 5 Smart glass shelves, of which 3 height-adjustable and 1 short shelf
- 1 spacious vegetable tray
- 5 spacious door trays
- 2 egg holders for 12 eggs

Freezer compartment features

- 3 drawers
- 1 ice cube tray

Accessories

- Berry tray
- For shelf and steamer accessories, see page 109



Prestige 60i

Fully integrable KPR60i/51027

Appliance information



- Appliance dimensions (H × W × D): 1776 × 548 × 545 mm



- 0.21 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 303 l
- Fridge compartment: 232 l
- Freezer compartment: 71 l

Fridge compartment features

- 5 Smart glass shelves, of which 3 height-adjustable and 1 short shelf
- 1 spacious vegetable tray
- 5 spacious door trays
- 2 egg holders for 12 eggs

Freezer compartment features

- 3 drawers
- 1 ice cube tray

Accessories

- Berry tray



Magnum 60i eco

Fully integrable KM60i/51031eco

Appliance information



- Appliance dimensions (H × W × D): 1776 × 548 × 545 mm



- 0.14 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 296 l
- Fridge compartment: 264 l
- Freezer compartment: 32 l

Fridge compartment features

- 5 glass shelves, of which 3 height-adjustable and 1 splittable
- 2 spacious vegetable trays
- 5 spacious door trays
- 1 movable divider
- 2 egg holders for 12 eggs

Freezer compartment features

- 1 support wire shelf
- 1 ice cube tray

Accessories

- Bottle rack

**Futura 60i eco**

Fully integrable KF60i/51061eco

Appliance information

- Appliance dimensions (H × W × D): 1522 × 548 × 545 mm



- 0.17 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 225 l
- Fridge compartment: 153 l
- Freezer compartment: 72 l

Fridge compartment features

- 4 Smart glass shelves, of which 2 height-adjustable and 1 short shelf
- 1 spacious vegetable tray
- 4 spacious door trays
- 2 egg holders for 12 eggs

Freezer compartment features

- 3 drawers
- 1 ice cube tray

Accessories

- Berry tray
- For shelf and steamer accessories, see page 109

**Futura 60i**

Fully integrable KF60i/51020

Appliance information

- Appliance dimensions (H × W × D): 1522 × 548 × 545 mm



- 0.23 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 252 l
- Fridge compartment: 181 l
- Freezer compartment: 71 l

Fridge compartment features

- 4 Smart glass shelves, of which 2 height-adjustable and 1 short shelf
- 1 spacious vegetable tray
- 4 spacious door trays
- 2 egg holders for 12 eggs

Freezer compartment features

- 3 drawers
- 1 ice cube tray

Accessories

- Berry tray

**Royal 60i**

Fully integrable KR60i/51018

Appliance information

- Appliance dimensions (H × W × D): 1522 × 548 × 545 mm



- 0.23 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 256 l
- Fridge compartment: 232 l, of which FreshControl zone: 24 l
- Freezer compartment: 24 l

Fridge compartment features

- 2 height-adjustable Smart glass shelves
- 5 spacious door trays
- 2 egg holders for 12 eggs

Freezer compartment features

- 1 support wire shelf
- 1 ice cube tray

**De Luxe 60i eco**

Fully integrable KL60i/51060eco

Appliance information

- Appliance dimensions (H × W × D): 1522 × 548 × 545 mm



- 0.14 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 281 l
- Fridge compartment: 257 l
- Freezer compartment: 24 l

Fridge compartment features

- 5 Smart glass shelves, of which 3 height-adjustable
- 1 spacious vegetable tray
- 5 spacious door trays
- 2 egg holders for 12 eggs

Freezer compartment features

- 1 support wire shelf
- 1 ice cube tray

**De Luxe 60i**

Fully integrable KL60i/51064

Appliance information

- Appliance dimensions (H × W × D): 1522 × 548 × 545 mm



- 0.20 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 281 l
- Fridge compartment: 257 l
- Freezer compartment: 24 l

Fridge compartment features

- 5 Smart glass shelves, of which 3 height-adjustable
- 1 spacious vegetable tray
- 5 spacious door trays
- 2 egg holders for 12 eggs

Freezer compartment features

- 1 support wire shelf
- 1 ice cube tray

**Komfort 60i**

Fully integrable KK60i/51048

Appliance information

- Appliance dimensions (H × W × D): 819-869 × 597 × 545 mm



- 0.32 kWh per 100 l of usable capacity in 24 hrs
- Total usable capacity: 126 l
- Fridge compartment: 108 l
- Freezer compartment: 18 l

Fridge compartment features

- 3 glass shelves, of which 2 height-adjustable and 1 splittable
- 2 spacious vegetable trays in the base with cover
- 3 door trays, including 1 with 2 sliding compartments
- 1 egg holder for 6 eggs

Freezer compartment features

- 1 ice cube tray

Accompaniment

- Assembly kit for under stone worktop

Wine cooler



A REAL WINE CONNOISSEUR

The Winecooler SL from V-ZUG, the first built-in wine cooler with two height-adjustable climate zones, does not hide your wine away from your guests.

The right temperature makes all the difference

The pleasure derived from a wine is primarily dependent on its quality. But that is not all: the selection of glasses and, above all, the correct serving temperature also play an important role.

Champagne and sparkling wines	5°C to 7°C
Dry white wines	8°C to 10°C
Semi-sweet rosé and white wines	10°C to 13°C
Light red wines	14°C to 16°C
Full-bodied red wines	17°C to 18°C

Perfect environment for wines

The automatic humidity control system guarantees perfect storage conditions for your wine. It also prevents the corks drying out.

Maximum flexibility with two climate zones

The two height-adjustable climate zones for white and red wine can be set independently to the perfect accurate-to-the-degree temperature. The range goes from 5°C to 18°C.

Fine wine in fine surroundings – thanks to full integration

The Winecooler SL has a harmonious exclusive design structure typical of the new FutureLine design from V-ZUG. The black glass front means it makes a perfect, subtle addition to any kitchen. The quality, radiation-impermeable glass door also protects the wine against unwanted UV radiation from sunlight.

LED light sources ensure optimum light distribution


The interior is evenly lit by four modern LED light sources which are fully integrated into the sides. The cold light does not affect the cooling climate and can be set to be on permanently even with the door closed if required. This showcases your fine wines for your guests.

SoftClose – gentle, safe door closing

The new door-closing system increases user-friendliness even further. However forcefully you close the door, the movement is braked and the door closes gently and quietly.

Quiet storage

Specially developed floating compressors guarantee the wine is stored in a vibration-free, quiet environment.

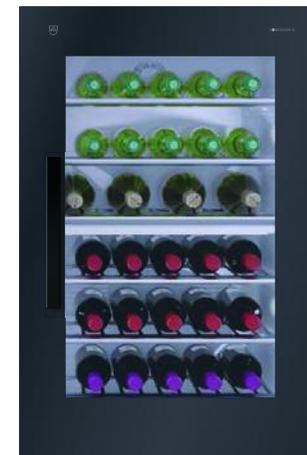

Winecooler SL 60

Black glass KWSL60/629

Front design

- G**
- Black design designer handle
- Appliance dimensions (H × W × D): 886 × 594 × 566 mm



Appliance information

- Energy consumption at 12°C interior temperature: 0.27 kWh/24 hrs
- Usable capacity: 149 l

Features

- Setting range for each zone: 5°C to 18°C
- 2 digital displays for separate zones
- Height-adjustable intermediate bottom for white/red wine
- Supercool function for fast cooling in the white-wine zone
- Chrome-plated support wire shelves in the V-ZUG design style
- Switch for permanent internal lighting
- Capacity: at least 36 bottles of 0.75 l

Options

- Chrome designer handle
- Chrome bar handle

Adora washing machines



V-ZUG has been producing washing machines since the 1920s and over the decades has continued to set standards in terms of functionality and design. The **Adora SLQ WP** is the most environmentally friendly washing machine of all time. Thanks to its innovative heat-pump technology, the top model sets completely new standards in terms of preserving resources – worldwide. Of course the Adora,

which has won prizes for energy efficiency and design, not only protects the environment, but also has convincing new features such as a 29-minute sprint programme and the innovative Steam Anti-Crease programme. Leading washing machine technology – developed and produced in Switzerland.



THE WORLD'S FIRST WASHING MACHINE WITH HEAT-PUMP TECHNOLOGY

The Adora SLQ WP is the most environmentally friendly washing machine of all time. Its innovative heat-pump technology means the top model Adora SLQ WP sets completely new standards when it comes to electricity consumption. The highly efficient heat-pump technology makes even the everyday programmes on the Adora SLQ WP very economical and makes a valuable contribution to environmental protection, wash after wash, day after day.

WORLD FIRST – STEAM ANTI-CREASE INSTEAD OF IRONING



Benefits

The innovative Steam Anti-Crease programme saves considerable time as it renders ironing superfluous in most cases.

Function

The steam produced in the washing machine is passed through fine openings in the drum to the washing. There, it releases its energy and removes the creases from the laundry items.

Praise from others



TESTEX®

The Swiss textile testing institute TESTEX has evidenced and confirmed the excellent results of the Steam Anti-Crease programme.

Operation

Steam Anti-Crease is most suitable for shirts, blouses and T-shirts. This world first can be programmed as an add-on directly after virtually all programmes. It can also be applied to washing that has already been dried and left lying around as a separate Steam Anti-Crease programme. The washing should be hung up to dry as quickly as possible after the Steam Anti-Crease programme. This achieves the best results.

WORLD FIRST – VIBRATION ABSORBING SYSTEM (VAS): UNBEATABLY QUIET

Benefits


The VAS has many benefits. On the one hand, the appliance spins very quietly with low levels of vibration. This extends the service life of the washing machine. On the other hand, it achieves the maximum spin speeds required. Spinning washing really well reduces drying time. Thanks to the VAS, all Adora washing machines meet the increased requirements of the SIA 181 standard and can therefore safely be used in apartments above ground level without additional structural changes.

Function

Spinning the washing creates imbalance in the drum. At the start of the spin cycle, the intelligent sensor system calculates the position and level of imbalance. The imbalance is compensated and balanced out by filling water into the appropriate vanes. This measurement and compensation process is repeated throughout the spin cycle.

Operation

You do not need to worry about anything, all washing machines apply the VAS completely automatically with every wash.

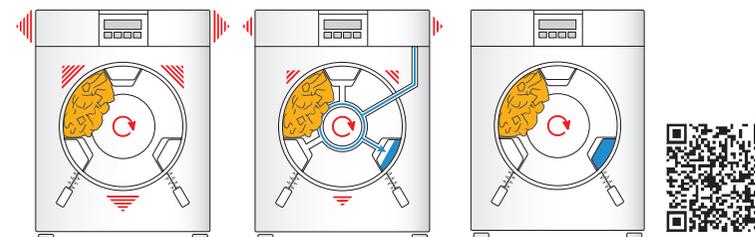

Washing piled up on one side causes imbalance.

The sensor detects this and compensates by adding water.

This recentres the drum and makes it quieter.



WORLD FIRST – ANTI-MITE: WATER AS AN “ANTI-ALLERGEN”

Allergies affect health. The numbers of sufferers is on the increase, and rising numbers of children suffering from allergies are bad news in particular. So allergens need to be taken seriously: they are lurking everywhere, even in textiles. V-ZUG has succeeded in researching new ways of banishing them.

In cooperation with with the aha! Swiss Allergy Centre:



The result is a comprehensive skin protection system in the new Adora: a welcome innovation for anyone suffering from allergies. V-ZUG has been working with leading specialists in its hunt for innovative solutions to protect allergy sufferers.

The innovative anti-mite programme lets allergy-sufferers breathe easier

Allergens are what trigger allergies. These include excretions from the house dust mite, which can cause respiratory problems. House dust mites are very robust. But they cannot survive the new Adora



anti-mite programme.

WORLD FIRST – WETCLEAN: WATER IN ITS GENTLEST ROLE YET



The gentle power of water for your most delicate items of clothing


It is the dawn of a new era for washing, especially for your delicates. Whether it is a little black dress, a long ball gown or a delicate ruched blouse – any delicates that can be washed in water can simply be chucked in the washing machine. But only if it says Adora SLQ on it.

V-ZUG makes the finest sprinkling jets

We are not only careful in our use of water, we are also intelligent. We have developed a completely new technology to ensure the gentle power of water is used for really gentle cleaning. The new Adora SLQ has a separate internal circulation system. The special distribution nozzles mean the washing is gently sprinkled with water from above and thus wetted gently. The result is a very gentle, delicate cleaning process, a kind of pampering session for your textiles.

You rock gently with things you love

Your favourite clothes need to be handled as gently as a baby by its mother. Gentle rocking between the specially designed vanes and the new microstructure of the drum with nearly 14,000 fine openings also add to the gentle power of the water. This means the washing is evenly and very gently wetted. Now and then, the washing is gently turned to ensure careful, all-round cleaning.

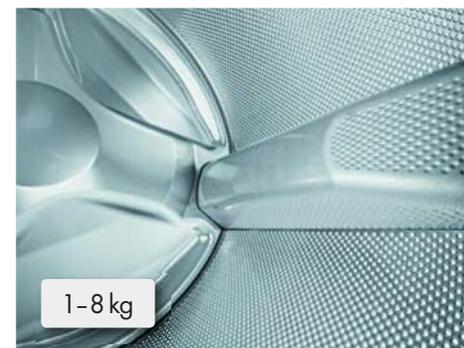

The new drum with microstructure

Although the V-ZUG drum has been the market leader for some 20 years, we have still developed and improved it again. The result is a completely new surface structure, a microstructure with nearly 14,000 specially shaped openings. They make sure your washing is soaked and yet still protected better than ever before. For a load of up to 8 kg of dry washing. Practical tests at the Swiss textile testing institute TESTEX prove that the drum provides maximum protection for your washing.



TESTEX®

EASY TO OPERATE

A pin-sharp TouchDisplay with explanatory pictures and symbols, simple touch-screen operation instead of pressing buttons and knobs and, on top of all this, the clear "Press and go" system. Using a washing machine has never been as simple, intuitive and innovative as with the new Adora models.



The new pivoting control panel

The control panel is now in the middle of the appliance. The panel is ergonomically designed for both left- and right-handers. To make sure that all the controls and display elements are perfectly visible, the position of the panel can be adjusted by 45° with a quick swivel movement.

THE NEW DETERGENT DISPENSER DRAWER



The detergent dispenser drawer of the new Adora generation has an innovative design and generous compartments. The design of the drawer also makes it easier to clean.

PRODUCT COMPARISON: ADORA WASHING MACHINES

	Adora SLQ WP	Adora SLQ	Adora SL	Adora S	Adora L
Brochure page	128	128	128	129	129
Versions					
Heat-pump technology	✓				
Front loader	✓	✓	✓	✓	✓
Design	Stainless steel/black design	✓/-	✓/-	-/✓	-/✓
Chrome door	✓	✓	✓		
White door				✓	✓
Door stop	1/r	1/r	1/r	1/r	1/r
Capacity	kg	1-8	1-8	1-8	1-8
Drum volume	l	60	60	60	60
Energy efficiency class	A+++	A+++	A+++	A+++	A+++
Better than energy efficiency class A+++	-50%	-30%	-20%	-10%	-10%
Spin-drying efficiency class	A	A	A	A	A
Uses					
WetClean	✓	✓			
Steam Anti-Crease	✓	✓	✓	✓	
Hygiene recommendation	✓	✓	✓	✓	✓
Appliance hygiene	✓	✓	✓	✓	
Anti-mite	✓	✓	✓	✓	✓
Vibration Absorbing System (VAS)	✓	✓	✓	✓	✓
Fast sprint programmes 20°C to 60°C	✓	✓	✓	✓	✓
Favourites	✓	✓	✓		
Fabric types	✓	✓	✓	✓	
Extra programmes	✓	✓	✓	✓	
Eco function	✓	✓	✓	✓	
Degree of soiling	✓	✓	✓	✓	
Spin speed	rpm	400-1600	400-1600	400-1600	400-1500
Turbidity Sensor	✓	✓			
Part load economy system	✓	✓	✓	✓	✓
Fleet recirculation	✓	✓			
Operation					
Pivoting control panel	✓	✓	✓	✓	✓
Panel	Acrylic glass	Acrylic glass	Acrylic glass	Film	Film
Control	TouchControl	TouchControl	TouchControl	Buttons	Buttons
Display	TouchDisplay, 10 languages	TouchDisplay, 10 languages	Plain text, 2 lines, 10 languages	Plain text, 2 lines, 10 languages	Digital, 4 characters
Standby energy save mode (0 W)	✓	✓	✓	✓	✓
Delayed start	up to 24 hrs	✓	✓	✓	✓



Adora SLQ WP

Stainless steel WAASLQWPZc/11004

The first with
heat-pump technology

Appliance dimensions

850 × 595 × 597 mm (H × W × D)

Programmes and features



Short programmes

Daily 40°C/60°C 74/92 min.
Sprint 40°C/60°C 35/48 min.

Additional programmes

- Skin protection, appliance hygiene
- Soaking, rinsing
- Conditioning, starching, proofing
- Soap wash, bio wash
- Spinning, 400-1600 rpm

Additional features

- Pivoting control panel
- TouchDisplay
- Fully electronic control
- Time display, programme status display
- Duration remaining indicator
- Part load economy system

Safety systems

- Vibration Absorbing System (VAS)
- Childproof lock
- Foam monitoring
- Leak protection
- Inlet hose with Aqua-Stop



Adora SLQ

Stainless steel WAASLQZc/11006

Appliance dimensions

850 × 595 × 597 mm (H × W × D)

Programmes and features



Short programmes

Daily 40°C/60°C 74/92 min.
Sprint 40°C/60°C 35/48 min.

Additional programmes

- Skin protection, appliance hygiene
- Soaking, rinsing
- Conditioning, starching, proofing
- Soap wash, bio wash
- Spinning, 400-1600 rpm

Additional features

- Pivoting control panel
- TouchDisplay
- Fully electronic control
- Time display, programme status display
- Duration remaining indicator
- Part load economy system

Safety systems

- Vibration Absorbing System (VAS)
- Childproof lock
- Foam monitoring
- Leak protection
- Inlet hose with Aqua-Stop



Adora SL

Stainless steel WAASLZc/11003

Appliance dimensions

850 × 595 × 597 mm (H × W × D)

Programmes and features



Short programmes

Daily 40°C/60°C 77/95 min.
Sprint 40°C/60°C 34/48 min.

Additional programmes

- Skin protection, appliance hygiene
- Soaking, rinsing
- Conditioning, starching, proofing
- Soap wash, bio wash
- Spinning, 400-1600 rpm

Additional features

- Pivoting control panel
- Plain text display, 2 lines
- Fully electronic control
- Time display, programme status display
- Duration remaining indicator
- Part load economy system

Safety systems

- Vibration Absorbing System (VAS)
- Childproof lock
- Foam monitoring
- Leak protection
- Inlet hose with Aqua-Stop



Adora S

Black design WAASZ/11002

Appliance dimensions

850 × 595 × 597 mm (H × W × D)

Programmes and features



Short programmes

Daily 40°C/60°C 75/90 min.
Sprint 40°C/60°C 35/45 min.

Additional programmes

- Skin protection, appliance hygiene
- Soaking, rinsing
- Conditioning, starching
- Soap wash, bio wash
- Spinning, 400-1500 rpm

Additional features

- Pivoting control panel
- Plain text display, 2 lines
- Fully electronic control
- Time display, programme status display
- Duration remaining indicator
- Part load economy system

Safety systems

- Vibration Absorbing System (VAS)
- Childproof lock
- Foam monitoring
- Leak protection
- Inlet hose with Aqua-Stop



Adora L

Black design WAALZ/11001

Appliance dimensions

850 × 595 × 597 mm (H × W × D)

Programmes and features



Short programmes

Daily 40°C/60°C 75/90 min.
Sprint 40°C/60°C 35/45 min.

Additional programmes

- Skin protection
- Soaking, rinsing
- Conditioning, starching
- Soap wash, bio wash
- Spinning, 400-1500 rpm

Additional features

- Pivoting control panel
- Digital display, 4 characters
- Fully electronic control
- Programme status display
- Duration remaining indicator
- Part load economy system

Safety systems

- Vibration Absorbing System (VAS)
- Childproof lock
- Foam monitoring
- Leak protection
- Inlet hose with Aqua-Stop

Type of construction

- Front loader
- Free-standing machine, stackable
- Door stop left/right
- Loading opening: Ø 35 cm
- Door opening angle: 180°

Adora heat-pump dryers



Drying washing with a prestige Adora tumble dryer makes looking after your clothes easier while at the same time improving efficiency. Its strengths really come to the fore when combined with an Adora washing machine, whether installed side by side or stacked. The washing is gently dried in the large drum and is cupboard-dry and ready

to wear again in no time. The heat-pump dryers, which are developed and produced in Zug, also have outstanding environmental credentials and excellent energy efficiency figures. The **Adora TSL WP** model was recently named the most resource-friendly dryer in Europe.

ENVIRONMENTALLY FRIENDLY AND ECONOMICAL DRYING

Sustainable use of resources begins with maximum energy efficiency in the production process and continues with low consumption figures for the appliances. Building the most energy efficient heat-pump dryers for household use takes more than just environmental awareness: it also requires excellent process knowledge, pioneering technologies, quality materials and intelligent designs.



The new Adora tumble dryers have impressively low consumption figures

The top model in efficiency class A+++ achieves top marks of just 152 kWh energy consumption per year.

ADORA HEAT-PUMP DRYER – USE IN CONFINED SPACES

The sealed process circuit in the Adora heat-pump dryer and the very low moisture emissions are decisive factors for its use in buildings constructed to the latest standards.

Moisture and heat stay in the dryer

While the Adora heat-pump dryer does its job, you can continue to use your bathroom or laundry room without annoying moisture or heat. This is extracted from the washing by a highly efficient heat exchanger and does thus not come out – the condensation efficiency of more than 92% means the heat produced remains in the sealed drying system.



A pain: many tumble dryers emit hot, damp air into the bathroom.



Unique: the Adora heat-pump dryers hold the heat and moisture in a sealed circuit.

CLEAR AND CONVENIENT – UNIQUELY USER-FRIENDLY

The text display provides clear, quick information about the different programmes and their progress. The tried and tested, intuitive “Press and go” system can be used to start programmes with a straightforward selection.



The new pivoting control panel

Like the Adora washing machine, the Adora tumble dryer also features a pioneering pivoting control panel. It can be moved into an ergonomic position, which makes it much easier to use. Individual settings also include ideal visibility of the control elements, which is particularly valuable in poor lighting conditions.

MADE-TO-MEASURE DRYING THANKS TO HUGE SELECTION OF PROGRAMMES



Babywear programme

Air-dried washing can remain hard and scratchy and can be irritating to the skin. If you want to spare your little one from annoying skin irritations, you should dry your washing in a V-ZUG dryer. The new babywear programme achieves perfect, hygienic results. Microbiological tests by Labor Veritas confirm how effective it is.




Basket programme

The handy drying basket can be used to dry shoes, gloves, cuddly toys and textiles in a stationary drum for extra protection. Textiles can be simply and easily placed in the dryer. The drying basket can be ordered as an accessory for all new Adora tumble dryers. The basket programme can be selected under fabric types.

Labor Veritas

GENTLE DRYING AND EASY CARE

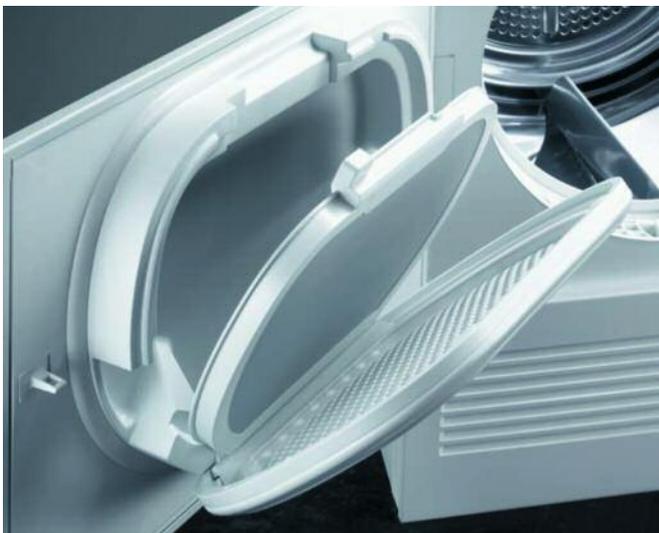

An impressive cleaning system

The large, smooth filter area is perfect for catching dust and lint to make sure your washing always remains soft and fluffy. The new door filter is also simple and easy to clean.



Gentle drying

The large 7 kg drum gently moves the washing to ensure even drying results. The textiles are less creased and easier to iron. The reversing drum (alternating directions) also helps, and this can be set separately with the new ReversePlus function.

The Swiss textile testing institute TESTEX confirms excellent effectiveness and gentle care.



PRODUCT COMPARISON: ADORA HEAT-PUMP DRYERS

	Adora TSL WP	Adora TS WP	Adora TL WP
Brochure page	136	136	137
Versions			
Heat-pump dryers	✓	✓	✓
Design Stainless steel/black design	✓/-	✓/✓	✓/✓
Free-standing machine, stackable	✓	✓	✓
Door stop	1/r	1/r	1/r
Capacity kg	1-7	1-7	1-7
Energy efficiency class	A+++	A++	A++
Uses			
Automatic programmes	27	20	15
Extra dry	✓	✓	✓
Normal dry	✓	✓	✓
Iron dry	✓	✓	✓
Damp	✓	✓	✓
Woolens	✓	✓	
Favourites	✓		
Fabric types	✓	✓	✓
Basket programme	✓	✓	✓
SilentPlus	✓		
Eco	✓		
Sprint	✓		
ReversePlus	✓	✓	
Crease-guard programme	✓	✓	
Timed drying	✓	✓	✓
Extra gentle	✓		
Gentle	✓	✓	✓
Operation			
Pivoting control panel	✓	✓	✓
Panel	Acrylic glass	Film	Film
Control	TouchControl	Buttons	Buttons
Display	Plain text, 2 lines, 10 languages	Plain text, 2 lines, 10 languages	Digital, 4 characters
Delayed start up to 24 hrs	✓	✓	✓
Standby energy save mode (0 W)	✓	✓	✓



Adora TSL WP

Stainless steel WTATSLWPZc/12003

Appliance dimensions

850 × 595 × 600 mm (H × W × D)

Programmes and features



Duration/power consumption with spinning efficiency class A at 1600 rpm (full load)

99 min./0.85 kWh

Sprint programmes

Normal dry, 105 min.

Additional programmes

- Timed drying, 10-120 min.

Additional features

- Pivoting control panel
- Plain text display, 2 lines
- 27 automatic programmes
- Fully electronic control
- Dryness setting
- Programme status display
- Duration remaining indicator
- Residual moisture sensor
- Direct condensate drainage

Safety features

- Temperature control
- Childproof lock
- Electronically monitored double-filter concept



Adora TS WP

Black design WTATSWPZ/12002
Stainless steel WTATSWPZc/12002

Appliance dimensions

850 × 595 × 600 mm (H × W × D)

Programmes and features



Duration/power consumption with spinning efficiency class A at 1600 rpm (full load)

93 min./1.09 kWh

Short programmes

Normal dry, 124 min.

Additional programmes

- Timed drying, 10-120 min.

Additional features

- Pivoting control panel
- Plain text display, 2 lines
- 20 automatic programmes
- Fully electronic control
- Dryness setting
- Programme status display
- Duration remaining indicator
- Residual moisture sensor
- Direct condensate drainage

Safety features

- Temperature control
- Childproof lock
- Electronically monitored double-filter concept

Type of construction

- Adora TSL WP/TS WP heat-pump dryers
- Drum volume: 105 l
- Free-standing machine, stackable
- Loading opening: Ø 42 cm
- Door opening angle: 180°

Options and accessories

- Visual impairment support film (TS WP)
- Drying basket
- Combi drainage set
- 130° door stop (niche installation)
- Convenient storage drawer



Adora TL WP

Black design WTATLWPZ/12001
Stainless steel WTATLWPZc/12001

Appliance dimensions

850 × 595 × 600 mm (H × W × D)

Programmes and features



Duration/power consumption with spinning efficiency class A at 1600 rpm (full load)

99 min./1.16 kWh

Short programmes

Normal dry, 136 min.

Additional programmes

- Timed drying, 10-150 min.

Additional features

- Pivoting control panel
- Digital display, 4 characters
- 15 automatic programmes
- Fully electronic control
- Dryness setting
- Programme status display
- Duration remaining indicator
- Residual moisture sensor
- Direct condensate drainage

Safety features

- Temperature control
- Childproof lock
- Electronically monitored double-filter concept

Type of construction

- Adora TL WP heat-pump dryer
- Drum volume: 105 l
- Free-standing machine, stackable
- Loading opening: Ø 42 cm
- Door opening angle: 180°
- Door stop left/right

Options and accessories

- Visual impairment support film
- Drying basket
- Combi drainage set
- 130° door stop (niche installation)
- Convenient storage drawer

Steamers and electric ovens

Company or brand name		V-ZUG Ltd															
Type of appliance		Steamer						Oven				Compact oven				Small oven	
Type or sales code		Combi Steam MSLQ CST MSLQ 60	Combi Steam HSL CST HSL 60	Steam HSE ST HSE 60	Combi Steam XSL CST XSL 60	Combi Steam XSL CST XSL 60 F	Combi Steam SL CS SL 60	Combi Steam SE CS SE 60	Combi SEP BC SEP 60	Combi SL BC SL 60	Combi SEP BC SEP 60	Combi SE BC SE 60	Combi XSEP BC XSEP 60	Combi XSL BC XSL 60	Combi XSEP BC XSEP 60	Combi XSE BC XSE 60	Combi HSE BC HSE 60
Illustration	Page	37	39	39	38	38	40	40	48	48	49	49	50	50	51	51	51
Consumption data¹⁾																	
Energy efficiency class	A+++ (best) to D (worst)	A	A+	A+	A+	A+	A+	A+	A	A	A	A	A	A	A	A	A
Energy consumption, conventional	kWh/cycle	0.79	–	–	–	–	0.7	0.7	0.85	0.86	0.94	0.93	0.8	0.79	0.88	0.81	0.81
Energy consumption, convection	kWh/cycle	0.67	0.47	–	0.53	0.53	0.63	0.63	0.7	0.7	0.78	0.8	0.66	0.65	0.7	0.69	0.63
Standby consumption in on/off status	W	0.09	0.084	0.084	0.073	0.073	0.062	0.085	0.066	0.066	0.075	0.075	0.066	0.066	0.075	0.075	0.075
Energy consumption for pyrolytic self-cleaning	kWh/cycle	–	–	–	–	–	–	–	3.1	–	3.1	–	3.1	–	3.1	–	–
Performance characteristics²⁾																	
Max. possible temperature for top/bottom heat, convection	°C	230/230	–/230	–/–	–/230	–/230	230/230	230/230	300/280	280/250	300/280	280/250	280/250	280/250	280/250	280/250	250/250
Temperature for steam mode	°C	30-100	30-100	30-100	30-100	30-100	30-100	30-100	–	–	–	–	–	–	–	–	–
Microwave power	W	700	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Usable grill area	cm ²	1100	–	–	–	–	1100	1100	1300	1300	1300	1300	1300	1300	1300	1300	1300
Usable cooking space volume	l	55	34	36	51	51	55	55	68	68	68	68	50	50	50	50	39
Dimensions³⁾																	
Height	cm	59.8	37.9	37.9	45.4	45.4	59.8	59.8	59.8	59.8	59.8	59.8	45.4	45.4	45.4	45.4	37.9
Width	cm	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6	59.6
Depth (from unit front)	cm	56.9	56.8	56.8	56.8	56.8	56.9	56.9	56.9	56.9	56.9	56.9	56.8	56.8	56.8	56.8	56.8
Depth with door open (from unit front)	cm	43.9	29.8	29.8	34.6	34.6	43.9	43.9	43.9	43.9	43.9	43.9	34.6	34.6	34.6	34.6	29.8
Empty weight ⁴⁾	kg	52	28	24	36	36	44	44	54	49	52	48	37	36	37	36	29
Features																	
Oven	large/medium/small	medium	small	medium	medium	medium	medium	medium	large	large	large	large	medium	medium	medium	medium	medium
Internal dimensions	Height	cm	31.9	25.6	25.6	28.0	28.0	31.9	35.1	35.1	35.1	35.1	26.25	26.25	26.25	26.25	20.75
	Width	cm	43.75	35.1	35.1	45.15	45.15	43.75	46.4	46.4	46.4	46.4	46.0	46.0	46.0	46.0	46
	Depth	cm	39.2	38.5	39.75	40.0	40.0	39.2	41.55	41.55	41.55	41.55	41.1	41.1	41.1	41.1	40.15
Illumination/viewing window		●/●	●/●	–/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●
Heating method	Top/bottom heat	●	–	–	–	–	●	●	●	●	●	●	●	●	●	●	●
	Forced convection	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
Hot Air	●	●	–	●	●	●	●	●	●	●	●	●	●	●	●	●	●
Steam	●	●	●	●	●	●	●	●	–	–	–	–	–	–	–	–	
Microwave	●	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
Catalytic cleaning	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	
Pyrolytic self-cleaning	–	–	–	–	–	–	–	–	●	–	●	–	●	–	●	–	
Grill element in place/can be reutilised	●/–	–/–	–/–	–/–	–/–	–/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	
Grill motor/forced convection grilling	–/●	–/–	–/–	–/–	–/–	–/–	–/●	–/●	●/●	●/●	–/●	–/●	–/●	–/●	–/●	–/●	
Time switch/timer	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	●/●	
Appliance drawer/heatable appliance drawer	–/–	–/–	–/–	–/–	–/–	–/–	–/○	–/○	–/○	–/○	–/○	–/○	–/–	–/–	–/–	–/–	
Electrical connection																	
Max. rated output	kW	3.7/5.7	3.5	2.2	3.7/3.8	3.7	3.7/4.7	3.7/4.7	3.4	3.4	3.4	3.4	3.3	3.3	3.3	3.3	3.1
Max. connected load	kW	3.7/5.7	3.5	2.2	3.7/3.8	3.7	3.7/4.7	3.7/4.7	3.4	3.4	3.4	3.4	3.3	3.3	3.3	3.3	3.1
Voltage	V	230~/400 2N~	230~/400 2N~	230~	230~/400 2N~	230~/400 2N~	230~/400 2N~	230~/400 2N~	230~/400 2N~	230~/400 2N~	230~/400 2N~	230~/400 2N~	230~/400 2N~	230~/400 2N~	230~/400 2N~	230~/400 2N~	230~/400 2N~
Fuse	A	1~16/2~16	1~16/2~10	10	1~16/2~10	1~16/2~10	1~16/2~10	1~16/2~10	1~16/2~10	1~16/2~10	1~16/2~10	1~16/2~10	1~16/2~10	1~16/2~10	1~16/2~10	1~16/2~10	1~16/2~10
Safety and service																	
In line with Swiss safety regulations	⑤ tested by Electrosuisse																
Country of origin	CH																
Guarantee	2 years																
Service by	V-ZUG Ltd																
Name and address of supplier	V-ZUG Ltd, Industriestrasse 66, 6301 Zug, Switzerland																

Explanations

- Fitted or yes
- Available at extra cost
- Not fitted or no

Note: Table information as at 01/2015. Subject to further developments.
For showroom appliances, the energy label provides information on the current data.

¹⁾ Values calculated based on the valid EN 50304/60350 norm.

²⁾ For built-in appliances, see dimension information on instruction sheets and in the brochure.

³⁾ For appliances to be cabinet fitted, make sure that the cabinet is able to support the weight of the appliance.

Coffee Centres

Company or brand name		V-ZUG Ltd	
Type of appliance		Fully automatic machine	
Model name		Supremo HSL	Supremo XSL
Model code		CCS HSL 60	CCS XSL 60
Illustration		Page	Page
Consumption data			
Energy efficiency class	A (best) to D (worst)	A	A
Annual energy consumption ¹⁾	kWh	45	45
Energy-saving function		●	●
Programmable automatic switch off	min.	15-180	15-180
Performance characteristics for			
Fully automatic machines		●	●
Capsule machines/single-serve machines		-	-
Espresso machines		-	-
Hot-water nozzle		●	●
Steam nozzle		●	●
Cappuccino frother nozzle		●	●
Hot-chocolate function		-	-
Type of construction			
Free-standing appliance		-	-
Built-in appliance		●	●
Dimensions ²⁾			
Height	cm	378	454
Width	cm	596	596
Depth	cm	412	412
Empty weight	kg	20.5	23
Technical data			
Power supply (electrical connection as per identification plate)			
Voltage	V	230 V~ 50 Hz	230 V~ 50 Hz
Output	W	1350	1350
Capacity			
Water tank	l	1.8	1.8
Bean container	g	200	200
Milk container	l	0.75	0.75
Coffee/milk outlet			
Height adjustable from/to	cm	8-11	8-11
Safety and service			
In line with Swiss safety regulations		Ⓢ Tested by Elektro Suisse	
Country of origin	IT		
Guarantee		2 years	
Service by		V-ZUG Ltd	
Name and address of supplier		V-ZUG Ltd, Industriestrasse 66, 6301 Zug, Switzerland	

Explanations

- Fitted or yes
- Not fitted or no
- ¹⁾ Values calculated based on valid FEA measurement methods.
- ²⁾ Niche dimensions for built-in appliances. Further dimensions can be found in the brochure.

Note: Table information as of 01/2015. Subject to further developments.
For showroom appliances, the energy labels provide information on the current data.

Warming drawers

Sales code		Warming drawer			
Type code		WS 60 144	WS 60 142	WS 60 220	WS 60 283
Illustration		Page	Page	Page	Page
Appliance dimensions					
External dimensions (H × W × D)	mm	142 × 596 × 547	160 × 596 × 547	218 × 596 × 547	281 × 596 × 547
Internal dimensions (H × W × D)	mm	97 × 429 × 457	115 × 429 × 457	173 × 429 × 457	236 × 429 × 457
Volume	dm ³	19	22	34	46
Empty weight	kg	21	21	22.5	24
Electrical connection					
Connection		230 V~ 50 Hz	230 V~ 50 Hz	230 V~ 50 Hz	230 V~ 50 Hz
Connected load		810 W	810 W	810 W	810 W
Fuse		10 A	10 A	10 A	10 A
Mains cable		1.7 m, with plug	1.7 m, with plug	1.7 m, with plug	1.7 m, with plug
Safety and service					
In line with Swiss safety regulations		Ⓢ Tested by Elektro Suisse			
Country of origin	SK				
Guarantee		2 years			
Service by		V-ZUG Ltd			
Name and address of supplier		V-ZUG Ltd, Industriestrasse 66, 6301 Zug, Switzerland			

Ceiling hood and island hoods

Company or brand name		V-ZUG Ltd										
Type of appliance		Ceiling hood					Island hood					
Model name/code		DS5R12	DI PQ 13	DI PQ 10	DI PQG 12	DI PQG 10	DI B 14	DI B 12	DI B 10	DI SE 12	DI SE 10	
Illustration		Page	84	85	85	84	84	85	85	85	85	
Consumption data ³⁾												
Energy efficiency class	A (best) to G (worst)	A	A	A	A	A	C	C	C	D	D	
Fluid-dynamic efficiency class	A (best) to G (worst)	A	A	A	A	A	B	B	B	D	D	
Illumination efficiency class	A (best) to G (worst)	D	A	A	A	A	F	F	F	F	F	
Grease separation class	A (best) to G (worst)	E	B	B	C	C	A	A	A	D	D	
Standby consumption	on/off status	0.85/0	0.8	0.8	0.99/0	0.99/0	0.35/0	0.35/0	0.35/0	0.99/0	0.99/0	
Air flow												
Extraction ²⁾	Intensive level	m ³ /h	830	703	703	679	679	825	825	825	581	581
	Max. level	m ³ /h	630	439	439	423	423	684	684	684	496	496
	Min. level	m ³ /h	230	251	251	255	255	270	270	270	240	240
Recirculation ²⁾	Intensive level	m ³ /h	-	578	578	558	558	550	550	550	364	364
	Max. power	m ³ /h	-	367	367	353	353	420	420	420	324	324
	Min. power	m ³ /h	-	221	221	224	224	204	204	204	173	173
Pressure ²⁾	Intensive level	Pa	630	362	362	370	370	419	419	419	464	464
	Max. level	Pa	530	364	364	365	365	400	400	400	446	446
	Min. level	Pa	420	177	177	168	168	270	270	270	260	260
Noise level ⁴⁾		dB(A)										
Intensive level	dB(A)	74	64	64	62	62	59	59	67	67	67	
Max. level	dB(A)	68	55	55	51	51	53	53	63	63	63	
Min. level	dB(A)	43	41	41	39	39	40	40	44	46	46	
Dimensions ⁴⁾												
Height: extraction/recirculation	cm	31	5.5	5.5	7	7	6.8	6.8	6.8	6	6	
Width	cm	120	130	100	120	100	140	120	100	120	100	
Depth	cm	70	70	70	70	70	70	70	70	60	60	
Depth with pull-out ⁵⁾	cm	-	-	-	-	-	-	-	-	-	-	
Min. distance above gas/electric hobs	cm	65/65	65/50	65/50	65/50	65/50	75/60	75/60	75/60	75/60	75/60	
Weight ⁶⁾	kg	33	35	31.5	35	34	45	40	36	23	21	
Features												
Exhaust connection, diameter	mm	150	150	150	150	150	150	150	150	150	150	
Exhaust connection, position		Side	Top	Top	Top	Top	Top	Top	Top	Top	Top	
Non-return flap valve integrated/provided		-/●	-/●	-/●	-/●	-/●	-/●	-/●	-/●	●/-	●/-	
Extraction/recirculation mode ⁷⁾		●/-	●/● ⁸⁾	●/● ⁸⁾	●/● ⁸⁾	●/● ⁸⁾	●/● ⁸⁾	●/● ⁸⁾	●/● ⁸⁾	●/● ⁸⁾	●/● ⁸⁾	
Number of filters	Metal/canbi	4/-	4/-	3/-	5/3	1/-	4/3	1/-	3/-	3/-	3/-	
Operation	Internal/external	●/●	●/-	●/-	●/-	●/-	●/-	●/-	●/-	●/-	●/-	
	Power levels	Number/infinitely variable	3 + 1/-	3 + 1/-	3 + 1/-	3 + 1/-	3 + 1/-	3 + 1/-	3 + 1/-	3 + 1/-	3 + 1/-	
Power regulation	Electromechanical/electronic	-/●	-/●	-/●	-/●	-/●	-/●	-/●	-/●	-/●	-/●	
Illumination	Hologen/LED	-/●	-/●	-/●	-/●	-/●	-/●	-/●	-/●	-/●	-/●	
Output	W	2 × 7	4 × 2.2	4 × 2.2	4 × 2.2	4 × 2.2	6 × 20	6 × 20	4 × 20	4 × 20	4 × 20	
Motor power	W	1 × 270	1 × 130	1 × 130	1 × 130	1 × 130	1 × 260	1 × 260	1 × 260	1 × 175	1 × 175	
Electrical connection												
Optional connection/connected load	W	-	●/300 ¹⁰⁾	●/300 ¹⁰⁾	●/300 ¹⁰⁾	●/300 ¹⁰⁾	●/300	●/300	●/300	●/200	●/200	
Electrical connection as per identification plate	W	284	138.8	138.8	138.8	138.8	680	680	640	455	455	
Length of connection cable	m	1	1.5	1.5	1.5	1.5	1.2	1.2	1.2	1.5	1.5	
Safety and service												
In line with Swiss safety regulations		Ⓢ Tested by Elektro Suisse										
Country of origin	IT	IT	IT	DE	DE	DE	DE	DE	DE	IT	IT	
Guarantee		2 years										
Service by		V-ZUG Ltd										
Name and address of supplier		V-ZUG Ltd, Industriestrasse 66, 6301 Zug, Switzerland										

Explanations

- Fitted or yes
- Not fitted or no
- ¹⁾ Values calculated based on the valid EU 65/2014 labelling directive.
- ²⁾ Air flow at operating point as per EN 61591.
- ³⁾ Sound level dB(A) (re 1 pW) in accordance with EN 60704-3.
- ⁴⁾ For built-in appliances, see also dimension information on instruction sheets and in the brochure.
- ⁵⁾ Deflector plate pulled out.
- ⁶⁾ Net weight incl. metal filter (make sure that the cabinet, the wall or the ceiling is able to support the appliance).
- ⁷⁾ Can be converted to recirculation mode.
- ⁸⁾ In combination with Zehnder comfort ventilation.
- ⁹⁾ Stainless steel.
- ¹⁰⁾ Can be selected as an option.

Note: Table information as of 01/2015. Subject to further developments.
For showroom appliances, the energy labels provide information on the current data.

Wall hoods, deflector plates and hood fans

Company or brand name		VZUG Ltd																											
Type of appliance		Wall hood												Curved deflector plate			Flat deflector plate/hood fan												
Model name/code	Page	DW PQ 12	DW PQ 9	DW PQG 12	DW PQG 9	DW VHR 9	DW VNR 9	DW Farno	DW SE 12	DW SE 9	DW B 14	DW B 12	DW B 9	DF SLE9	DF SLE6	DHL 11	DHL 8	DEH 7	DEH 5	DEHM R8	DEHM R7	DEHM R5	DF PQ 12	DF PQ 9	DF PQ 6	DF PQSL 9	DF PQSL 6		
Consumption data ¹⁾		87	87	86	86	86	87	86	88	88	87	87	87																
Energy efficiency class	A (best) to G (worst)	A	A	A	A	A+	A	D	D	D	C	C	C	D	D	C	C	D	D	A	B	B	A	A	A	A	A+	A+	
Fluid-dynamic efficiency class	A (best) to G (worst)	A	A	A	A	A	A	D	D	D	B	B	B	E	E	C	C	D	D	A	B	B	A	A	A	A	A	A	
Illumination efficiency class	A (best) to G (worst)	A	A	A	A	A	A	F	F	E	F	F	F	D	C	A	A	D	D	A	A	A	A	A	A	A	A	A	
Grease separation class	A (best) to G (worst)	B	B	C	C	D	C	D	D	D	A	A	A	D	D	E	E	B	B	C	C	C	B	B	B	B	B	B	
Standby consumption	on/off status	0.8	0.8	0.8/0	0.8/0	0.85/0	1.1/0	0.8/0	0.99/0	0.99/0	0.35/0	0.35/0	0.35/0	0.99/0	0.99/0	0.35/0	0.35/0	0/0	0/0	0.85/0	0.85/0	0.85/0	0.8/0	0.8/0	0.8/0	0.8/0	0.7/0		
Air flow																													
Extraction ²⁾	Intensive level	m ³ /h	710	710	679	679	870	823	703	581	581	825	825	825	581	581	563	563	–	–	690	640	640	684	684	684	699	699	
	Max. level	m ³ /h	438	438	423	423	650	647	616	496	496	684	684	684	496	496	469	469	600	600	560	540	540	424	424	424	440	440	
	Min. level	m ³ /h	260	260	255	255	280	368	295	364	364	270	270	270	272	272	228	228	300	300	270	270	253	253	253	278	278		
Recirculation ³⁾	Intensive level	m ³ /h	532	532	556	556	410	464	370	364	364	550	550	550	360	360	322	322	–	–	310	280	280	556	556	556	551	551	
	Max. level	m ³ /h	371	371	358	358	250	447	351	324	324	420	420	420	283	283	233	233	360	360	300	270	270	342	342	342	359	359	
	Min. power	m ³ /h	227	227	222	222	240	394	173	173	204	204	204	210	210	146	146	210	210	250	230	230	227	227	227	200	200		
Pressure ⁴⁾	Intensive level	Pa	364	364	370	370	650	543	370	464	464	419	419	419	345	345	463	463	–	–	550	550	550	362	362	362	380	380	
	Max. level	Pa	363	363	365	365	550	517	361	446	446	400	400	400	338	338	436	436	340	340	540	540	540	345	345	345	353	353	
	Min. level	Pa	172	172	168	168	440	474	232	260	260	270	270	270	167	167	201	201	240	240	460	450	450	158	158	158	179	179	
Noise level ⁵⁾		dB(A)																											
Intensive level		dB(A)	64	64	62	62	73	72	66	67	67	59	59	59	67	67	61	61	–	–	68	71	71	67	67	67	64	64	
Max. level		dB(A)	55	55	51	51	67	66	65	63	63	53	53	53	63	63	57	57	72	72	64	69	69	55	55	55	53	53	
Min. level		dB(A)	41	41	39	39	49	53	51	46	46	40	40	40	48	48	40	40	56	56	51	55	55	40	40	40	40	40	
Dimensions ⁶⁾																													
Height, extraction/recirculation		cm	5.5	5.5	7	7	50	51.5	46	6	6	6.3	6.8	6.8	About 2.5	About 2.5	30	30	30.5	30.5	33	33	33	5.5	5.5	5.5	2.5	2.5	
Width		cm	120	90	120	90	89.8	89.8	80	119.9	89.9	140	120	90	89.9	59.8	110	80	70.2	52.2	86	70	52	119.8	89.8	89.8	89.8	59.8	
Depth		cm	55	55	55	55	33.9	32.5	30	50	50	70	70	70	31.5-35.5	31.5-35.5	30	30	28.4	28.4	30	30	30-32.5	30-32.5	30-32.5	30-34.8	30-34.8		
Depth with pull-out ⁷⁾		cm	–	–	–	–	–	–	–	–	–	–	–	–	Max. 52.5	Max. 52.5	–	–	–	–	–	–	Max. 49	Max. 49	Max. 49	Max. 48	Max. 48		
Min. distance above gas/electric hobs		cm	65/50	65/50	65/50	65/50	45/45	50/40	65/65	75/60	75/60	75/60	75/60	75/60	75/60	75/60	75/60	75/60	65/65	65/65	65/65	65/65	65/50	65/50	65/50	65/50	65/50		
Weight ⁸⁾		kg	29	25.5	32	28.5	16	19	34	20	14	45	40	36	15	15	29	25.5	6	5	9	8	7	27.5	23.5	19.5	16.5	12.5	
Features																													
Exhaust connection, diameter		mm	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
Exhaust connection, position			Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	Top	
Non-return flap valve integrated/provided			–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	
Extraction/recirculation mode ⁹⁾			●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	●/● ¹⁾	
Number of filters	Metal/cambis		4/–	3/–	8	6	2/–	2/–	4/–	4/–	3/–	1/–	1/–	1/–	1/–	1/–	1/–	1/–	2/–	2/–	1/–	2/–	2/–	4/–	3/–	2/–	2/2	1/1	
Operation	Internal/external		●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	●/–	
Power levels	Number/infinity variable		3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	3 + 1/–	
Power regulation	Electromechanical/electronic		–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●
Illumination	Halogens/LED		–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●	–/●
Output		W	3 × 2.2	3 × 2.2	3 × 2.2	2 × 2.2	2 × 1.1	2 × 2.5	2 × 20	3 × 20	2 × 20	6 × 20	4 × 20	4 × 20	2 × 20	2 × 20	4 × 3	4 × 3	2 × 20	2 × 20	2 × 1.1	2 × 1.1	2 × 1.1	3 × 2.2	2 × 2.2	2 × 2.2	2 × 2.2	2 × 2.2	
Motor power		W	1 × 130	1 × 130	1 × 130	1 × 130	1 × 270	1 × 300	1 × 250	1 × 175	1 × 175	1 × 260	1 × 260	1 × 260	2 × 110	2 × 110	1 × 188	1 × 188	1 × 205	1 × 205	1 × 265	1 × 265	1 × 265	1 × 130	1 × 130	1 × 130	1 × 130	1 × 130	
Electrical connection																													
Optional connection/connected load		W	●/300 ¹¹⁾	●/300 ¹¹⁾	●/300 ¹¹⁾	●/300 ¹¹⁾	–/–	–/–	–/–	●/200	●/200	●/300	●/300	●/300	–/–	–/–	–/–	–/–	–/–	–/–	–/–	–/–	●/300 ¹¹⁾						
Electrical connection as per identification plate		W	136.6	134.4	136.6	134.4	272.2	305	290	435	415	680	640	640	260	260	200	200	245	245	267.2	267.2	267.2	136.6	134.4	134.4	134.4	134.4	
Length of connection cable		m	1.5	1.5	1.5	1.5	1.2	1.2	1.2	1.5	1.5	1.2	1.2	1.2	1.5	1.5	1.5	1.5	1.2	1.2	1.2	1.2	1.5	1.5	1.5	1.5	1.5		
Safety and service																													
In line with Swiss safety regulations			☑ Tested by Electrosuisse																										
Country of origin			IT	IT	DE	DE	IT	IT	IT	IT	DE	DE	DE	IT	IT	DE	DE	IT	IT	IT	IT	IT	IT	IT	IT	IT	IT	IT	
Guarantee			2 years																										
Service by			VZUG Ltd																										
Name and address of supplier			VZUG Ltd, Industriehaus 66, 6301 Zug, Switzerland																										

Explanations
 ● Fitted or yes
 – Not fitted or no
 1) Values calculated based on the valid EU 65/2014 labelling directive.
 2) Air flow at operating point as per EN 61591.
 3) Sound level dB(A) (re 1 pW) in accordance with EN 60704-3.

4) For built-in appliances, see also dimension information on instruction sheets and in the brochure.
 5) Deflector plate pulled out.
 6) Net weight incl. metal filter (make sure that the cabinet, the wall or the ceiling is able to support the appliance).
 7) Can be converted to recirculation mode.
 8) In combination with Zehnder comfort ventilation.
 9) Stainless steel.
 10) Can be selected as an option.

Note: Table information as at 01/2015. Subject to further developments.
 For showroom appliances, the energy labels provide information on the current data.

Microwave ovens

Sales code	Miwell Combi XSL 60	Miwell Combi HSL 60	Miwell HSL 60	Miwell L 60
Type code	MWC XSL 60	MWC HSL 60	MW HSL 60	MW L 60
Illustration	Page 56	56	56	57
Performance characteristics				
Microwave power	W 50-900	50-1000	50-1000	140-750
Grill power	W 1600	800	800	-
Dimensions				
Appliance dimensions (H × W × D)	mm 454 × 596 × 567	378 × 596 × 516	378 × 596 × 470	378 × 596 × 320
Cooking space dimensions (H × W × D)	mm 210 × 450 × 420	200 × 405 × 380	200 × 405 × 380	187 × 370 × 290
Volume	l 40	31	31	22
Empty weight	kg 35	29	28	21.5
Electrical connection				
Connection	230 V ~ 50 Hz	230 V ~ 50 Hz	230 V ~ 50 Hz	230 V ~ 50 Hz
Connected load	2800 W	2300 W	2300 W	1300 W
Fuse	16 A	10 A	10 A	10 A
Mains cable	1.4 m, without plug	1.2 m, with plug	1.2 m, with plug	1.2 m, with plug
Safety and service				
In line with Swiss safety regulations	☑ Tested by Ecthosuisse			
Country of origin	IT			
Guarantee	2 years			
Service by	V-ZUG Ltd			
Name and address of supplier	V-ZUG Ltd, Industriestrasse 66, 6301 Zug, Switzerland			

Product declaration for gas hobs

Company or brand name	V-ZUG Ltd				
Model	GK21TG (Induction) Design fits gas edition	GK51TGG	GK41TG	GK21TG	GK11TG
Type	HMI/2GA	HSE-43F4130	HSE-43F4030	HSE-43F2030	HSE-43FW130
Illustration	Page 79	78	78	78	79
Built-in	front edge, side profile	front edge, side profile	front edge, side profile	front edge, side profile	front edge, side profile
Operation	knob/touch control	knob	knob	knob	knob
Heating type	induction	natural gas	natural gas	natural gas	natural gas
Heat output	kW 3.7	13.7	7.7	4.7	6
Power levels	9 + booster function	fully adjustable	fully adjustable	fully adjustable	fully adjustable
Dimensions (W × D × H)	mm 302 × 520 × 57	912 × 520 × 57	602 × 520 × 57	302 × 520 × 57	302 × 520 × 57
Work surface cut-out (W × D)	mm 270 × 2 × 490-500	850 × 490	560 × 490	270 × 2 × 490-500	270 × 2 × 490-500
Net weight	kg 5	18	11	6	8
Voltage/frequency	V, Hz 220-240, 50/60	220-240, 50/60	220-240, 50/60	220-240, 50/60	220-240, 50/60
Connected load	W 3600	1	1	1	1
Minimum fuse protection	A 16	3	3	3	3
Mains cable length	cm 110	100	100	100	100
Safety and service					
Country of origin	ES				
Guarantee	2 years				
Supplier name and address	V-ZUG Ltd, Industriestrasse 66, 6301 Zug/Switzerland				

Glass-ceramic, induction and Toptronic hobs

Model	Stainless steel trim	Faceted model	Flush model	Block design	Weight in kg	External appliance dimensions, W/D in mm	Cut-out in the working, W/D in mm	Connected voltage, connected load	Can be combined with
GK26TMS.ZF			●	●	6.5	384 × 501	390 × 507/shelf dimensions: 373 × 490	230 V ~ 3700 W 16 A	Operating voltage: 230 V ~, 1 pole conductor/neutral conductor/earth conductor
GK46TMS		●		●	10.5	584 × 514	560 × 490	400 V2N ~ 7400 W 16 A	Operating voltage: 230 V ~, 2 pole conductors/neutral conductor/earth conductor
GK46TMS.C	●			●	10.5	584 × 514	560 × 490	400 V2N ~ 7400 W 16 A	
GK46TMS.IF			●	●	10.5	571 × 501	577 × 507/shelf dimensions: 560 × 490	400 V2N ~ 7400 W 16 A	
GK56TMS		●		●	18.5	910 × 514	886 × 490	400 V3N ~ 11,100 W 16 A	
GK56TMS.C	●			●	18.5	910 × 514	886 × 490	400 V3N ~ 11,100 W 16 A	Operating voltage: 230 V ~, 3 pole conductors/neutral conductor/earth conductor
GK56TMS.IF			●	●	18.5	897 × 501	903 × 507/shelf dimensions: 886 × 490	400 V3N ~ 11,100 W 16 A	
GK16TYS.IF Tappan Yuki			●	●	8	384 × 501	390 × 507/shelf dimensions: 373 × 490	230 V ~ 2800 W 16 A	Operating voltage: 230 V ~, 1 pole conductor/neutral conductor/earth conductor
GK26TYS.IF Tappan Yuki			●	●	12.5	571 × 501	577 × 507/shelf dimensions: 560 × 490	400 V2N ~ 5600 W 16 A	Operating voltage: 230 V ~, 2 pole conductors/neutral conductor/earth conductor
GK46/47TMS.C	●			●	12	910 × 410	886 × 386	400 V2N ~ 7400 W 16 A	
GK46TMS.C	●			●	12	774 × 514	750 × 490	400 V2N ~ 7400 W 16 A	
GK46TMS.C/TMS	●			●	12	774 × 514	750 × 490	400 V2N ~ 7400 W 16 A	
GK46TMS.C	●			●	11.5	704 × 514	680 × 490	400 V2N ~ 7400 W 16 A	
GK37TMS.C	●			●	10	584 × 514	560 × 490	400 V2N ~ 7400 W 16 A	
GK37TMS.C		●		●	11	774 × 444	750 × 420	400 V2N ~ 7400 W 16 A	
GK37TMS.F		●		●	11	774 × 444	750 × 420	400 V2N ~ 7400 W 16 A	
GK46/47TMS		●		●	12	910 × 410	886 × 386	400 V2N ~ 7400 W 16 A	
GK46TMS		●		●	12	774 × 514	750 × 490	400 V2N ~ 7400 W 16 A	
GK46TMS/TMS		●		●	12	774 × 514	750 × 490	400 V2N ~ 7400 W 16 A	
GK26TMS		●		●	5.5	289 × 514	265 × 490	230 V ~ 3700 W 16 A	
GK37TMS		●		●	10	584 × 514	560 × 490	400 V2N ~ 7400 W 16 A	
GK37TMS			●	●	11	744 × 414	750 × 420/shelf dimensions: 733 × 403	400 V2N ~ 7400 W 16 A	
GK46/47TMS.F			●	●	12	880 × 380	886 × 386/shelf dimensions: 869 × 369	400 V2N ~ 7400 W 16 A	
GK46TMS.F			●	●	12	761 × 501	767 × 507/shelf dimensions: 750 × 490	400 V2N ~ 7400 W 16 A	
GK46TMS.F/TMS.F			●	●	12	761 × 501	767 × 507/shelf dimensions: 750 × 490	400 V2N ~ 7400 W 16 A	
GK46TMS.F			●	●	11.5	691 × 501	697 × 507/shelf dimensions: 680 × 490	400 V2N ~ 7400 W 16 A	
GK37TMS.F			●	●	10	571 × 501	577 × 507/shelf dimensions: 560 × 490	400 V2N ~ 7400 W 16 A	
GK26TMS.IF			●	●	5.5	281 × 501	287 × 507/shelf dimensions: 270 × 490	230 V ~ 3700 W 16 A	
GK16TMS.IF Wok			●	●	9	384 × 501	390 × 507/shelf dimensions: 373 × 490	230 V ~ 3000 W 16 A	
GK11TMS.Love Grill					12	520 × 302	490 × 270	220 V ~ 2400 W	

Model	Stainless steel trim	Faceted model	Flush model	Block design	Weight in kg	External appliance dimensions, W/D in mm	Cut-out in the working, W/D in mm	Connected voltage, connected load	Can be combined with
GK5STE.C	●			●	18.5	910 × 514	886 × 490	400 V3N ~ 10,300 W 16 A	Operating voltage: 230 V ~ ⁻¹ , 2 pole conductors/neutral conductor/earth conductor
GK5TE.F			●	●	18.5	897 × 501	903 × 507/shelf dimensions: 886 × 490	400 V2N ~ 10,300 W 16 A	
GK4STE.PSC	●			●	11	910 × 410	886 × 386	400 V2N ~ 7600 W 16 A ¹⁾	
GK4STE.BSC	●			●	11	584 × 514	560 × 490	400 V2-3 ~ 7700 W 16-10 A ¹⁾	
GK4STE.ASC	●			●	11	774 × 514	750 × 490	400 V2N ~ 7600 W 16 A ¹⁾	Operating voltage: 400 V ~ ⁻¹ , 2 or 3 pole conductors/earth conductor
GK2STE.IF			●	●	5	281 × 501	287 × 507/shelf dimensions: 270 × 490	230 V ~ 3000 W 16 A	
GK2STE		●		●	5	289 × 514	265 × 490	230 V ~ 3000 W 16 A	

Refrigerators

Company or brand name		V-ZUG Ltd																									
Type of appliance		Fridge/freezer						Fridge/freezer																			
Sales code		Cooltronic 60i		Noblese 60i		Prestige P 60i eco		Prestige 60i eco		Prestige 60i		Magnum 60i eco		Futura 60i eco		Futura 60i		Royal 60i		De Luxe 60i eco/De Luxe 60i		Komfort 60i		Wincooler SL 60			
Illustration		111		111		112		112		112		113		114		114		114		115		115		117			
Appliance type classification																											
Energy efficiency class		A++		A++		A+++		A+++		A++		A++/A++		A+++		A++		A++		A+++/A++		A++		A			
Energy consumption over 365 days ¹⁾		LWh		227		219		154		154		230		148/222		141		212		214		143/204		145		145 ¹⁾	
Appliance properties																											
Usable capacity, total ²⁾		l		262		312		276		276		303		296		225		252		256		281		126		149	
Of which NoFrost compartment		l		--		--		--		--		--		--		--		--		--		--		--		--	
Usable capacity, fridge compartment		l		214		244		203		203		232		244		153		181		232		257		108		149	
Of which cellar compartment, max./min. ³⁾		l/l		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/	
Of which cold storage compartment ⁴⁾		l		39		--		--		--		--		--		--		--		24		--		--		--	
Of which ice cube compartment		l		--		--		--		--		--		--		--		--		--		--		--		--	
Usable capacity, freezer compartment		l		--		--		--		--		--		--		--		--		--		--		--		--	
Of which star compartment		l		48		68		73		73		71		72		71		24		24		24		18		--	
Of which ice cube compartment		l		--		--		--		--		--		--		--		--		--		--		--		--	
Star classification ⁵⁾		****		****		****		****		****		****		****		****		****		****		****		****		--	
Freezer capacity ⁶⁾		kg		5		4		8		8		3		2		2		2		2		2		--			
Storage time in the event of problems ⁷⁾		hrs		20		15		15		15		14		15		15		15		15		14		--			
Climate class ⁸⁾		SN-ST		SN		SN-T		SN-T		SN-T		SN-T		SN-T		SN-T		SN-T		SN-T		SN-T		N-T		SN-ST	
Sound level ⁹⁾		dB(A) (re 1 pW)		38		38		35		35		36		35		37		37		36		33/36		38		39	
Fridge compartment defrost method		Manual		--		--		--		--		--		--		--		--		--		--		--		--	
Parly automatic		--		--		--		--		--		--		--		--		--		--		--		--		--	
Automatic		●		●		●		●		●		●		●		●		●		●		●		●		●	
Freezer compartment defrost method		Manual ¹⁰⁾		●		●		●		●		●		●		●		●		●		●		●		●	
Parly automatic ¹¹⁾		--		--		--		--		--		--		--		--		--		--		--		--		--	
Automatic		--		--		--		--		--		--		--		--		--		--		--		--		--	
Type of construction and designation																											
Free-standing appliance/for under worktop		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/	
With worktop at table height		--		--		--		--		--		--		--		--		--		--		--		--		--	
Under worktop/integratable ¹²⁾		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/		●/●		-/	
Built-in options/integratable ¹³⁾		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●	
Special model, see brochure		--		--		--		--		--		--		--		--		--		--		--		--		--	
Number of outside doors/drawers		2/-		2/-		2/-		2/-		2/-		1/-		2/-		2/-		1/-		1/-		1/-		1/-		1/-	
Door stop ¹⁴⁾		r		r		r		r		r		l/w		r		r		r		r		r		r		l/w	
Decorative frame		in place/can be refitted		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/		-/	
Dimensions ¹⁵⁾																											
Height		cm		177.8		177.8		177.8		177.8		177.8		152.4		152.4		152.4		152.4		152.4		82-89		87.3	
Width		cm		56		56		56		56		56		56		56		56		56		56		60		56	
Depth including wall spacing		cm		55		55		55		55		55		55		55		55		55		55		55		55	
Height without worktop		cm		--		--		--		--		--		--		--		--		--		--		--		--	
Width with door open or drawer pulled out		cm		--		--		--		--		--		--		--		--		--		--		--		--	
Depth with door open or drawer pulled out		cm		115		115		115		115		113		115		115		115		115		115		114.5		114	
Empty weight ¹⁶⁾		kg		75		70		75		75		68		62		62		61		62		61		32		48	
Features																											
Adjustable freezer compartment temperature		●		●		●		●		●		--		--		--		--		--		--		--		--	
Independent of fridge compartment temperature		--		--		--		--		--		●		●		●		●		●		●		●		--	
Linked to fridge compartment temperature		--		--		--		--		--		●		●		●		●		●		●		●		--	
Switch for continuous freezer operation		--		--		--		--		--		--		--		--		--		--		--		--		--	
Indicators																											
Fridge compartment		Normal mode		Green light		--		--		--		--		--		--		--		--		--		--		--	
Temperature display		Inside/outside		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●	
Door open, warning signal		Visual/audiosic		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●	
Freezer compartment		Normal mode		Green light		--		--		--		--		--		--		--		--		--		--		--	
Continuous operation		Yellow light		--		--		--		--		--		--		--		--		--		--		--		--	
Error, warning signal		Visual/audiosic		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●	
Door open, warning signal		Visual/audiosic		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●	
Temperature display		Inside/outside		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●		●/●	
Fridge compartment																											
Egg holders		Number of eggs		12		12		12		12		12		12		12		12		12		12		6		--	
Door compartments with flip or sliding door		Quantity		1		1		1		1		1		1		1		1		1		1		1		--	
Door storage shelves and/or containers		Quantity		3		3		4		4		4		3		3		4		4		4		2		--	
Storage shelves in fridge compartment		Quantity		4		5		5		5		5		4		4		3		3		4		3		6	
Of which adjustable		Quantity		2		3		3		3		3		2		2		2		2		2		2		1	
Containers in fridge compartment		Quantity		3		4		1		1		2		1		1		4		4		4		2		--	
Freezer compartment																											
Door compartments		Quantity		--		2		--		--		--		--		--		--		--		--		--		--	
Internal compartments		Quantity		2		3		3		3		3		1		3		3		2		2		1		--	
Max. internal compartment height		cm		16.2		26.5		16.6		16.6		16.6		28		16.6		16.6		22.8		22.8		13		--	
Internal baskets, containers, drawers		Quantity		2		1		3		3		3		3		3		3		1		--		--		--	
Ice cube trays		Quantity		1		1		1		1		1		1		1		1		1		1		1		--	
Electrical connection																											
As per identification plate		V/A/W		230/10/140		230/10/110		230/10/115		230/10/115		230/10/115		230/10/80		230/10/100		230/10/100		230/10/100		230/10/100		230/10/100		230/10/100	
Safety and service																											
In line with Swiss safety regulations		● Tested by Electrosuisse																									
Country of origin		CH		CH		CH		CH		CH		IT		CH		CH		CH		CH		CH		IT		CH	
Guarantee		2 years																									
Service by		V-ZUG Ltd																									
Set-up and installation instructions		●																									
Name and address of supplier		V-ZUG Ltd, Industriestrasse 66, 6301 Zug, Switzerland																									

Explanations

- Fitted or yes
- Not fitted or no
- ¹⁾ Energy consumption over 365 days is calculated based on DIN EN 153, edition 1990. The figures relate to 230 V, 50 Hz. The consumption figures allow a comparison of different appliances. There might be discrepancies between these and the actual figures.
- ²⁾ Including cellar, cold storage and ice compartment, where they exist.
- ³⁾ Compartment for storage at higher temperatures of between +8°C and +14°C
- ⁴⁾ Compartment for storage at lower temperatures of between +3°C and -2°C.
- ⁵⁾ ● = compartment at +6°C or colder. ● = compartment at -12°C or colder. ● = deep-freeze compartment at -18°C or colder.
- = freezer and deep freezer at -18°C or colder with a minimum freezer capacity.
- ⁶⁾ Depending on the model, the freezer capacity quoted may only be achieved after continuous operation is switched on and cannot be repeated after 24 hrs. Please refer to instructions for use.
- ⁷⁾ Time after which temperature has increased to -9°C with freezer compartment fully loaded. The times are shorter for part loads.
- ⁸⁾ Climate class SN: ambient temperatures from +10°C to +32°C
Climate class N: ambient temperatures from +16°C to +32°C
Climate class ST: ambient temperatures from +16°C to +38°C
Climate class T: ambient temperatures from +16°C to +43°C.
- ⁹⁾ Measured based on the valid EN 60704-2:14 norm.
- ¹⁰⁾ Frozen goods must be removed before defrosting.
- ¹¹⁾ Can be built in if a door panel is used.
- ¹²⁾ Door stop:
l = left, r = right, w = worktable.
- ¹³⁾ Niche dimensions required for built-in appliances and under-worktop appliances (min. dimensions).
- ¹⁴⁾ Make sure that the cabinet or wall is able to support the appliance plus contents.
- ¹⁵⁾ Energy consumption at 12°C internal temperature over 365 days (at an ambient temperature of 25°C).

Note: Table information as at 01/2015. Subject to further developments.

Household dishwashers

Company or brand name	V-ZUG Ltd					
Type or sales code	Adora 60 SL					
Model name/code	GS 60 SLWP/d/Vi	GS 60 SL-d B/Vi B	GS 60 SL-d/Vi	GS 60 SL-d/Vi	GS 60 N/d/Vi	
Illustration	Page	99/101	99/101	100/102/103	100/102/103	
Consumption data for standard programme	Eco programme	Eco programme	Eco programme	Eco programme	Eco programme	
Energy efficiency class ¹⁾	A+++ (best) to D (worst)	A+++	A+++	A+++	A+	
Annual energy consumption	kWh	137	204	196	204	280
Energy consumption per wash cycle ²⁾	kWh	0.49	0.73	0.70	0.73	0.99
Standby consumption on/off status	W	0	0	0	0	0.3
Annual water consumption ¹⁾	l	2445	1876	1820	2576	2576
Water consumption per wash cycle ³⁾	l	8.7	6.7	6.5	9.2	9.2
Performance characteristics for standard programme						
Drying effect class ¹⁾	A (best) to G (worst)	A	A	A	A	A
Duration ¹⁾	min.	160	150	140	140	150
Automatic switch-off time	min.	0	0	0	0	0
Capacity	Place settings	13	14	13	13	13
Noise during normal/standard programme⁴⁾						
If built-in	dB(A) (w 1 µW)	46/44	42/40	42/40	44/44/43	44
Type of construction						
Built-in appliance		●	●	●	●	●
Free-standing machine with worktop		--	--	--	--	--
Free-standing machine for under worktop		--	--	--	--	--
Upper installation		●	●	●	●	●
Can be decorated		●	●	●	●	●
Integrable/fully integratable		●/●	●/●	●/●	●/●	●/●
Dimensions⁵⁾						
Height	cm	87-91	76.5-96.9	76.5-96.9	76.5-96.9	76.5-96.9
Width	cm	60	60	60	60	60
Depth including wall spacing	cm	58	58	58	58	58
Depth with open door	cm	116.5	116.5-123	116.5-123	116.5-123	116.5-123
Height, adjustable	cm	4	11.6	11.6	11.6	11.6
Empty weight	kg	62-67	46-55	46-55	46-55	46-55
Features						
Number of wash programmes		10	10	10	9	5
Heat pump		●				
ergofix cutlery drawer			●			
LED interior lighting		●	●	●		
Automatic door opener		●	●	●	●	
Vario inserts/adjustable to various heights		●/●	●/●	●/●	●/●	●/●
Plain text display			●	●	--	--
Limescale sensor/water hardness control		●/●	●/●	●/●	●/-	●/-
Soil sensor		●	●	●	●	--
SteamFisch		●	●	●	--	--
Automatic programme		●	●	●	●	--
Fondue/Rachette programme		●	●	●	●	--
Sprint programme		●	●	●	--	--
Daily Quick programme		●	●	●	--	--
Hygiene programme		●	●	●	●	--
Glass programme		●	●	●	●	--
All-in-one setting		●	●	●	●	●
Active water stop		●	●	●	●	●
Salt consumption per wash cycle/per place setting	g	7/0.54	7/0.54	7/0.54	9/0.7	11/0.85
Electrical connection						
Voltage/connected load/fuse	V/kW/A	230 V/3.2/16	230 V/3.2/16	230 V/3.2/16	230 V/2.2/10	230 V/2.2/10
Water connection						
Pressure hose G½", length	m	1.5	1.5	1.5	1.5	1.5
Can be connected to	Cold/hot water	●/●	●/●	●/●	●/●	●/●
Water pressure	bar	1-10	1-10	1-10	1-10	1-10
Safety and service						
In line with Swiss safety regulations		Ⓢ Tested by Electrosuisse				
Country of origin		CH				
Guarantee		2 years				
Service by		V-ZUG				
Name and address of supplier		V-ZUG Ltd, Industriestrasse 66, 6301 Zug, Switzerland				

Explanations

● Fitted or yes

-- Not fitted or no

¹⁾ Values calculated based on the valid EN 50242 norm during the normal/standard programme.

Annual consumption based on 280 standard wash cycles with cold-water connection, standby consumption included.

²⁾ Measured based on the valid IEC 60704-2-3 norm during the normal/standard programme.

³⁾ Niche dimensions for built-in appliances. Further dimensions can be found in the brochures.

⁴⁾ Details of switchover options may be found in the brochures.

Note: Table information as at 01/2015. Subject to further developments.

For showroom appliances, the energy labels provide information on the current data.

Adora washing machines

Company or brand name	V-ZUG Ltd					
Type of appliance	Front loader					
Type or sales code	Adora SLQ WP	Adora SLQ	Adora SL	Adora S	Adora L	
Model name/code	11004	11006	11003	11002	11001	
Rated capacity	Max. kg	8	8	8	8	
Consumption data for standard wash cycle¹⁾						
Energy efficiency class	A+++ (best) to D (worst)	A+++	A+++	A+++	A+++	
Annual energy consumption	kWh	98	136	155	175	175
Energy consumption for standard programme 60/60½/40½ ²⁾	kWh	0.52/0.41/0.36	0.78/0.62/0.37	0.94/0.67/0.37	1.00/0.70/0.58	1.00/0.70/0.58
Standby consumption on/off status	W	0/0	0/0	0/0	0/0	0/0
Annual water consumption	l	9800	9900	9900	9900	9900
Performance characteristics						
Spinning efficiency class ^{1,4)}	A (best) to G (worst)	A	A	A	A	A
Residual moisture ⁵⁾	%	44	44	44	44	44
Spin speed ¹⁾	Max. rpm	1600	1600	1600	1500	1500
Programme duration for standard programme 60/60½/40½ ⁶⁾	min.	190/180/180	225/220/215	210/190/190	210/190/190	210/190/190
Automatic switch-off time	min.	0	0	0	0	0
Noise ⁷⁾						
During wash phase	dB(A) (w 1 µW)	50	47	47	48	48
During spin phase	dB(A) (w 1 µW)	71	71	72	73	73
Illustration	Page	128	128	128	129	129
Type of construction						
Free-standing machine with worktop		●	●	●	●	●
Free-standing machine for under worktop		●	●	●	●	●
Underworktop unit (without worktop)		--	--	--	--	--
Mobile		--	--	--	--	--
Door stop ⁸⁾	l/w	l/w	l/w	l/w	l/w	
Dimensions⁹⁾						
H x W x D (including wall spacing)	cm	85.2/59.5/60 (63)	85.2/59.5/60 (63)	85.2/59.5/60 (63)	85.2/59.5/60 (63)	85.2/59.5/60 (63)
Height for under worktop	cm	85.2	85.2	85.2	85.2	85.2
Height with open lid (top loader)	cm	--	--	--	--	--
Depth with open door (front loader)	cm	102	102	102	102	102
Height, adjustable	cm	2	2	2	2	2
Empty weight	kg	84	71	70	64	64
Features						
Washing machine with heat-pump technology		●	--	--	--	--
Panel		Acrylic glass	Acrylic glass	Acrylic glass	Film	Film
Control		Touch	Touch	Touch	Buttons	Buttons
Display		TouchDisplay	TouchDisplay	Plain text, 2 lines	Plain text, 2 lines	Digital, 4 characters
Languages for TouchDisplay/plain text display		14	14	14	14	--
Coloureds 60°C 230 V 10 A	Duration min.	92"	92	95	90	90
Coloureds 60°C Sprint 230 V 10 A	Duration min.	48"	48	48	45	45
Coloureds 40°C 230 V 10 A	Duration min.	74"	74	77	75	75
Coloureds 40°C Sprint 230 V 10 A	Duration min.	35"	35	35	35	35
Steam Anti-Crease		●	●	●	●	--
Vibration Absorbing System (VAS)		●	●	●	●	●
Anti-mite/skin protection		●/●	●/●	●/●	●/●	●/●
Part load economy system		●	●	●	●	●
Favourites		●	●	●	--	--
Fabric types		●	●	●	●	--
Delayed start	up to hrs	24	24	24	24	24
Standby energy save mode	0 W	●	●	●	●	●
Connection cable	m	1.8	1.8	1.8	1.8	1.8
Inlet hose with AquaStop	m	1.25	1.25	1.25	1.25	1.25
Drain hose with elbow	m	1.5	1.5	1.5	1.5	1.5
Installation plate		●	●	●	●	●
Pumping height for drain pump	m	1.2	1.2	1.2	1.2	1.2
Other features	See page	33	33	33	33	33
Power and water supply						
Electrical connection						
Voltage	V	230~	230~	230~	230~	230~
Connected load	kW	3.6	3.6	3.6	2.3	2.3
Fuse	A	16 ¹⁰⁾	16 ¹⁰⁾	16 ¹⁰⁾	10	10
Water connection						
Pressure hose G ½"		●	●	●	●	●
Can be connected to	Cold/hot water (option)	●/-	●/●	●/●	●/●	●/●
Safety and service						
In line with Swiss safety regulations		Ⓢ Tested by Electrosuisse				
Country of origin		CH				
Guarantee		2 years				
Service by		V-ZUG Ltd				
Name and address of supplier		V-ZUG Ltd, Industriestrasse 66, 6301 Zug, Switzerland				

Explanations

● Fitted or yes

-- Not fitted or no

¹⁾ Values calculated based on the valid EN 640456 norm during a standard wash cycle. This is a mix of different programmes (60°C, 40°C, full and part load). Annual energy and water consumption based on 220 standard wash cycles, standby consumption included.

²⁾ 100% water removal means that 1 kg of water is retained in 1 kg of washing (dry weight) after spinning. The lower the percentage, the less damp the washing is. This is important for electricity consumption when drying in a tumble dryer.

³⁾ Door stop: l=left, r=right, w=switchable, u=bottom. For example: l/w is as delivered, with door stop left but switchable.

⁴⁾ Niche dimensions for under-worktop appliances.

Further dimensions can be found in the brochures.

⁵⁾ Details of switchover options may be found in the brochures.

⁶⁾ Spinning efficiency is very important if a tumble dryer is normally used for drying. Washing spun in a washing machine with spinning efficiency class A and then put in a tumble dryer uses half as much energy and therefore generates half the operating costs as if it was spun in a washing machine with a spinning efficiency class G.

⁷⁾ Values calculated based on the valid EN 60704-2-4 norm during the standard cottons 60°C programme with full load.

⁸⁾ 60/60½/40½ stands for a standard cottons 60°C programme with full load or for a standard cottons 60°C/40°C programme with a part load.

⁹⁾ At EcoHybrid level. 

¹⁰⁾ If the appliance is connected to a 230 V/16 A socket, item P53.575 (connection cable: 3 x 1.5 mm²) must be used. Installation to be carried out in accordance with conversion instructions WB.5585.

Note: Table information as at 01/2015. Subject to further developments. For showroom appliances, the energy label provides information on the current data.

Adora tumble dryers

Company or brand name	V20IG Ltd		
Type of appliance	Condenser dryer with heat pump		
Type or sales code	Adora TSL WP	Adora TS WP	Adora TL WP
Model name/code	12008	12002	12001
Rated capacity	7	7	7
Consumption class ¹⁾	A+++ (best) to D (worst)	A++	A++
Energy efficiency class	A+++	A++	A++
Annual energy consumption	152 kWh	184 kWh	200 kWh
Energy consumption for standard programme, full/part load	1,24/0,73 kWh	1,50/0,88 kWh	1,64/0,95 kWh
Standby consumption in on/off status	2,5/0 W	2,5/0 W	2,5/0 W
Performance characteristics			
Average programme duration for standard programme ¹⁾	min. 102	96	106
Programme duration for standard programme, full/part load ¹⁾	min. 130/81	124/76	136/83
Automatic switch-off time	min. 30	30	30
Condensation efficiency class ²⁾	A (best) to G (worst)	A	A
Average condensation efficiency for standard programme ³⁾	% 95	95	94
Moss ⁴⁾	dB(A) (e 1 pM)	65	65
Illustration	See page 136	136	137
Type of construction			
Free-standing machine with workshop	●	●	●
Free-standing machine for under workshop	–	–	–
Under-worktop unit (without workshop)	–	–	–
Free-standing machine for washer-dryer tower	Yes	Yes	Yes
Appliance for wall mounting	–	–	–
Door stop ⁵⁾	1/1/w	1/1/w	1/1/w
Dimensions			
Height	cm 85	85	85
Width	cm 59,5	59,5	59,5
Depth (including wall spacing)	cm >60,5	>60,5	>60,5
Height for under workshop	cm –	–	–
Depth with open door	cm 118	118	118
Height, adjustable	cm 2	2	2
Empty weight	kg 60	60	60
Drying control			
By selecting time	●	●	●
Automatically by means of electronic moisture sensor	●	●	●
Features			
Heat pump condensation system	●	●	●
Panel	Acrylic glass	Film	Film
Control	Touch	Buttons	Buttons
Display	Plain text, 2 lines	Plain text, 2 lines	Digital, 4 characters
Longest for plain text display	14	14	–
Programmes	27	20	15
Tactix type automatic programme	●	●	●
SilentPlus	●	–	–
Eco	●	–	–
Sprint	●	–	–
ReversPlus	●	–	–
Delayed start	up to hrs 24	24	24
Timed drying	min. 10–120	10–120	10–150
Programme duration for cottons (subprogramme) with spinning efficiency A1 (44% residual moisture) spun at around 1600 rpm	min./kWh 99/0,85	93/1,09	99/1,16
Standby energy save mode	0 W	●	●
Protonom loading opening	Ø cm/cm ² 42/1376	42/1376	42/1376
Automatic door opener	●	●	●
Drain hose	m 2	2	2
Pumping height for drain pump	m 1,2	1,2	1,2
Connection cable	m 1,9	1,9	1,9
Insulation plate	●	●	●
Nose emissions	dB(A) 65	65	65
Other features	See page 46	46	47
Power and water supply			
Electrical connection			
Voltage	V 230~	230~	230~
Connected load	kW 1,3	1,3	1,3
Fuse	A 10	10	10
Safety and service			
In line with Swiss safety regulations	Ⓢ Tested by Ekteknuisse		
Country of origin	CH		
Guarantee	2 years		
Service by	V20IG Ltd		
Name and address of supplier	V20IG Ltd, Industriemasse 66, 6301 Zug, Switzerland		

Explanations

- Fitted or yes
- Not fitted or no
- ¹⁾ Values calculated based on the world EN 61121 norm. Annual energy consumption based on 160 drying cycles for the standard cottons programme with full and part loads, standby consumption included. Before drying, the washing was spun at approximately 1000 rpm (residual moisture: 60%).
- ²⁾ Values calculated based on the world EN 60704-2-6 norm for standard cottons programme with full load.
- ³⁾ Door stop: 1 = left, r = right, w = switchable. For example: 1/w is as delivered, with door stop on left but switchable.
- ⁴⁾ The dimensions quoted are the minimum dimensions for the space under the workshop. Further dimensions can be found in the brochures.
- ⁵⁾ Set the level of dryness as per the instructions for use depending on the type of washing.
- ⁶⁾ Automatic compliance with dryness level.
- ⁷⁾ Details of switchover options may be found in the brochures.

Note: Table information as of 01/2015.

Subject to further developments. For showroom appliances, the energy label provides information on the current data.



V-ZUG PRODUCTS
ARE AVAILABLE IN

Switzerland and Australia, Belgium, China, France, Germany, Hong Kong, the Republic of Ireland, Israel, Italy, Lebanon, Luxembourg, Malaysia, the Netherlands, Norway, Russia, Singapore, Sweden, Turkey, Ukraine and the United Kingdom

For products available in your country, please refer to the respective country collection.

FOR MORE
INFORMATION,
PLEASE CONTACT

V-ZUG Ltd
Industriestrasse 66
6301 Zug
Switzerland

Tel: +41 58 767 67 67
Fax: +41 58 767 61 61

info@vzug.com
vzug.com

