




V-ZUG Ltd

Industriestrasse 66, P.O.Box, 6302 Zug/Switzerland

Phone +41 58 767 67 67, Fax +41 58 767 61 67

info@vzug.com, www.vzug.com

Brochure GKD46TIMAS Fusion

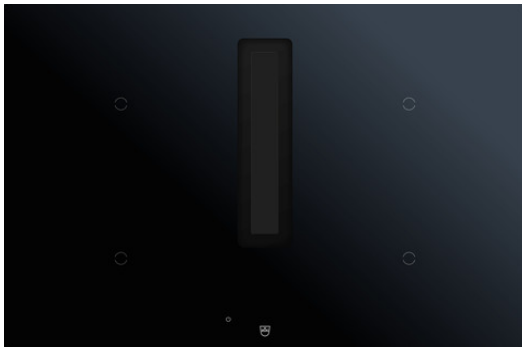

Selected product

- Article no.: 3109460415
- EAN code: 7630029429723
- Hero-Name: Fusion
- OptiGlass
- Controls: TouchControl
- Standard width: 80 cm
- Front design: BlackDesign
- Frame: DualDesign



Details GKD46TIMAS

Produktdatenblatt Kochfelder

- Cooking zones: 4
- Heating technology: induction cooking zones

Design

- Hero-Name: Fusion
- OptiGlass
- Controls: TouchControl
- Standard width: 80 cm
- Front design: BlackDesign
- Frame: DualDesign

Dimensions

- Cut-out height: 8.5 mm
- Cut-out radius: 5 mm
- Appliance height: 206 mm
- Appliance width: 761 mm
- Appliance depth: 501 mm
- Appliance corner radius: 1.5 mm
- Support size width: 750 mm
- Max. support size width: 750 mm
- Support size depth: 490 mm
- Max. support size depth: 490 mm
- Installation height when flush-fitted: 206 mm
- Installation height when surface-mounted: 202 mm
- Cut-out width when flush-mounted: 767 mm
- Cut-out width when surface-mounted: 750 mm
- Max. cut-out width when surface-mounted: 750 mm
- Cut-out depth when flush-mounted: 507 mm
- Cut-out depth when surface-mounted: 490 mm
- Max. cut-out depth when surface-mounted: 490 mm
- Empty weight: 23.5 kg
- Cooking zone 1 position: front left
- Cooking zone 1 dimensions: 18 cm
- Cooking zone 2 dimensions: 21 cm
- Cooking zone 3 dimensions: 21 cm
- Cooking zone 4 dimensions: 18 cm

Display and operation

- Display: Graphic touch display
- Operating time
- Number of languages in display: 10
- Languages in display: de, fr, it, en, nl, ru, uk, tr, he, zh
- Button sound (on/off)

Energy

- Energy efficiency rating: B
- Annual energy consumption: 50.2 kWh
- Fluid dynamic efficiency: 25.9
- Fluid dynamic efficiency rating: B
- Cooking zone 1 max. power: 3000 W
- Cooking zone 2 max. power: 3500 W
- Cooking zone 3 max. power: 3700 W
- Cooking zone 4 max. power: 3000 W
- Type of connection (1): 380-415 V 2N~
- Type of connection (2): 220-240 V~
- Frequency (1): 50-60 Hz
- Frequency (2): 50-60 Hz
- Connected loads (1): 7.4 kW
- Connected loads (2): 7.4 kW
- Fuse protection (1): 16 A
- Fuse protection (2): 32 A
- Plug type: cable

Hob features

- OptiGlass
- Hob category: Induction with integrated range hood
- Operating time with shut-down function
- Residual heat indicator
- Timer
- Cooking zones: 4
- Power levels: 9 + i
- Heating technology: induction cooking zones



Range hood features

- Power levels: 9 + i

Functions

- Extracted air
- Heating function
- Childproof lock
- OptiLink
- Powerplus
- Pause button
- Warming function
- Automatic warm-up function
- Cleaning lock
- Melt function
- Simmer function

Additional data

- Grease absorption capacity rating: C
- Extracted air output, intensive setting: 582.8 m³/h
- Extracted air output, max. setting: 371 m³/h
- Extracted air output, min. setting: 66 m³/h
- Recirculation air output, intensive setting: 521 m³/h
- Recirculation air output, max. setting: 350 m³/h
- Recirculation air output, min. setting: 16 m³/h
- Extracted air noise output, intensive setting: 68 dB(A)
- Extracted air noise level, max. setting: 60 dB(A)
- Extracted air noise output, min. setting: 28 dB(A)
- Recirculation air noise output, intensive setting: 75 dB(A)
- Schalleistung Umluft max. Stufe: 66 dB(A)
- Recirculation air noise output, min. setting: 31 dB(A)
- Feature level: 4

Preisschild Kochfelder

- Cooking zones: 4
- Powerplus
- OptiGlass
- Operating time with shut-down function

Preisschild Dunstabzüge

- Extracted air

Service and interfaces

- WLAN as standard: 802.11 b/g/n
- Warranty: 2 years