
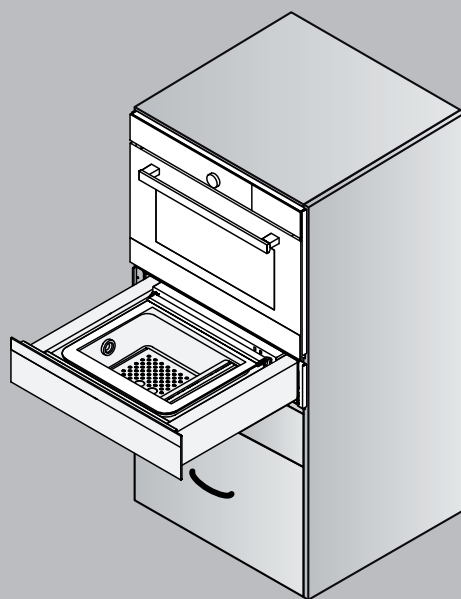
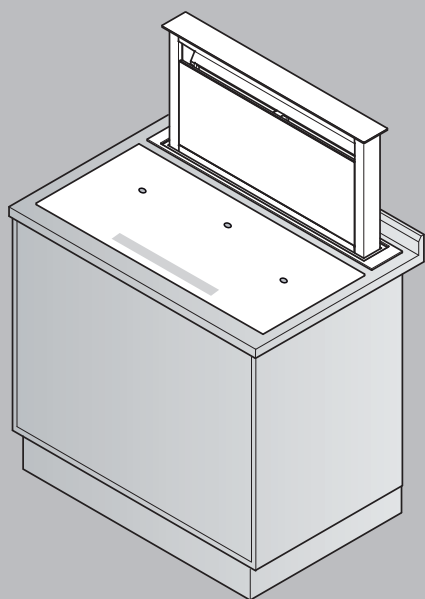
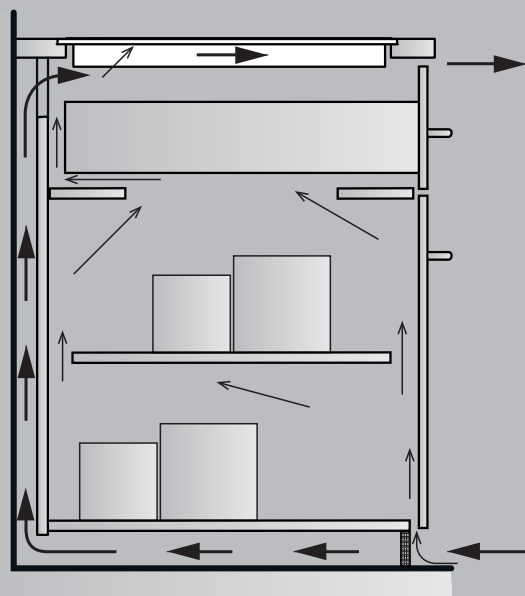


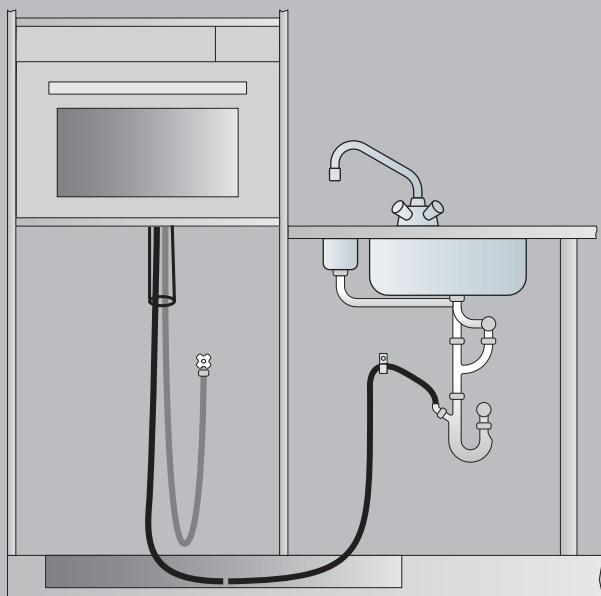

Planning aid

Australia collection
Kitchen appliances
2023

Note on content

Please note

This planning aid applies to the specified model numbers only. Older planning aids for earlier generation models may be requested in electronic form from our Customer Services.

This planning aid is not to be used as installation instructions! The regulations and instructions binding for the appliance installation are to be obtained from the installation instructions packed with the appliances. The installation instructions can also be downloaded from the internet from www.vzug.com/b2b.

Modifications

Text, diagrams and data correspond to the technical standard of the appliances at the time this planning aid went to press. The right to make technical modifications for the purpose of the further development of the appliances is reserved. The German, English, French and Italian versions are binding. V-ZUG accepts no liability for translations in other languages.

Symbols used



Denotes important safety precautions.

Failure to observe said precautions can result in injury or in damage to the appliance or fittings!

- ▶ Indicates an instruction.
- Indicates a list.



Information and precautions that should be observed.



Extraction



Recirculation

Supplementary documents

In this planning aid, occasional reference is made to supplementary documents. These documents can be requested from the Head Office in Zug by sending an e-mail to service-support@vzug.com.

Useful links

- www.vzug.com
- www.vzug.com/b2b
- www.lifestyle.vzug.com



Contents

1 Overview of connections, ranges and dimensions	5
1.1 General operating conditions	5
1.2 Using residual current devices in house wiring system / fault current	5
1.3 Validity	6
1.4 Positions of electrical connections	8
1.5 Built-in EURO	9
1.6 Front dimensions of Excellence appliances	10
2 Steam cookers	12
2.1 General notes	12
2.2 Electrical connection data	12
2.3 Excellence Line 90 cm	13
2.4 Excellence Line 60 cm	13
3 Ovens	17
3.1 General notes	17
3.2 Electrical connection data	17
3.3 Excellence Line 60 cm	17
4 Vacuum drawers, warming drawers & system drawers	19
4.1 General notes	19
4.2 Electrical connection data	19
4.3 Vacuum drawers	20
4.4 Warming drawers	23
4.5 System drawers	25
5 Automatic built-in coffee machines	26
5.1 General notes	26
5.2 Electrical connection data	26
5.3 Front dimensions	26
5.4 CoffeeCenter V6000 45 (25005)	26
6 Combination possibilities	27
6.1 Oven & steam cooker	27
6.2 Oven & automatic built-in coffee machine	28
7 CookTop glass ceramic hobs	29
7.1 General notes	29
7.2 OptiGlass coating	29
7.3 Electrical connection data	29
7.4 Ventilation	30
7.5 Surface-mounted installation with «DualDesign»	31
7.6 Flush installation with «DualDesign»	37
7.7 Installation without protective plate	43
7.8 Installation with protective plate	45
8 Gas hobs	48
8.1 Electrical connection data	48
8.2 Gas connection	49
8.3 Ventilation	50
8.4 Setting up appliance to use local gas type	50
8.5 Surface-mounted installation with «DualDesign»	51
8.6 Flush installation with «DualDesign»	54
9 Combined hob installation	57
9.1 Surface-mounted combination	57
9.2 Examples of surface-mounted combinations	58
9.3 Flush combination	59
9.4 Examples of flush combinations	60
10 CombiCookTop induction hob with hood	61
10.1 Electrical connection data	61
10.2 Dimensions	61
10.3 Scope of delivery	62
10.4 Ventilation of the hob	62
10.5 Surface-mounted installation	63
10.6 Flush installation	64
10.7 Installation overview base unit	65



10.8 Flat channel systems made of plastic (RF3)	67
10.9 Flat channel systems made of metal (RF1)	68
10.10 Recirculation mode	69
10.11 Extraction mode	69
11 Range hoods	71
11.1 General notes	71
11.2 Special hoods	71
11.3 Built-in hoods	84
12 Dishwashers	86
12.1 General notes	86
12.2 Electrical connection data / plumbing in	87
12.3 Installation overview	89
12.4 Drilling plans for decor panel 60 cm	90
12.5 Dishwasher with niche width 60 cm	91
13 Dishwashers with heat pump	95
13.1 General notes	95
13.2 Electrical connection data / Plumbing-in data	96
13.3 Installation summary	97
13.4 Drilling plans for decor panel 60 cm	98
13.5 Dishwasher with niche width 60 cm	99
14 Refrigerators	101
14.1 General notes	101
14.2 Electrical connection data	101
14.3 Ambient conditions	101
14.4 Niche ventilation	102
14.5 Refrigerators	103
14.6 Winecoolers	105
14.7 Freezers	107
15 Accessories	108
15.1 Ovens / steam cookers / microwave ovens / coffee machines / vacuum drawers / warming drawers / system drawers	108
15.2 Hobs and gas hobs	111
15.3 Range hoods	113
15.4 Dishwashers	124
15.5 Refrigerators	125
16 V-ZUG-Home	126
16.1 Internet access	126
16.2 Scope of delivery	126
16.3 Connecting to the home network	126
Index	127
17 Notes	129

1 Overview of connections, ranges and dimensions



Electrical connections must be carried out by qualified experts in accordance with the guidelines and standards for low-voltage installations and the specifications of the local electricity supply companies.

A plug-in appliance may only be connected to a socket outlet with earthing contact, installed according to specifications. An all-pole mains isolating device with 3 mm contact opening should be provided in the house wiring system. Switches, plug and socket devices, circuit breakers and fusible cut-outs which are accessible after installation and which have all-poles switching are permissible as isolating devices. Effective earthing and separately installed neutral and earth conductors ensure safe and fault-free operation. After installation, live parts and cables with basic insulation must not be accessible. Check old installations.

1.1 General operating conditions



Detailed information on the electrical connection data can be found at the beginning of each section.

Value	Nominal value	Minimum	Maximum
Voltage	230 V	207 V	253 V
Voltage	400 V	360 V	440 V
Frequency	50 Hz sinusoidal	49 Hz sinusoidal	51 Hz sinusoidal

- Short duration frequency variation in the mains: $\pm 5\%$
- Long duration frequency stability in the mains (for synchronous clocks): ± 10 ppm
- If used at an altitude of over 2,000 metres, a reduced performance must be expected.

1.2 Using residual current devices in house wiring system / fault current

High fault currents are inherently present in ovens and hobs. The values can be affected by various factors and vary widely. Fault currents of up to approximately 10 mA per appliance are permissible in accordance with the norm. The values are measured in the warm operating state.

If residual current devices (RCDs) are used in the house wiring system, we recommend that the above-mentioned appliances have their own RCD protection, separate from the power supply for the rest of the system. 30 mA or higher should be selected as the tripping current for the residual current device.



1.3 Validity

The model number corresponds to the first alphanumeric of the serial number SN (or FN) on the identification plate.

Model designation	Model number	Type
Steamers		
Steamer V4000 45	23026	S4T-23026
CombiSteamer V4000 45	23031	CS4T-23031
CombiSteamer V6000 45	23032	CS6T-23032
CombiSteamer V6000 45F	23033	CS6T-23033
CombiSteamer V6000 45L Grand	23034	CS6T-23034
CombairSteamer V2000 60	23036	CS2T-23036
CombairSteamer V6000 60	23038	CS6T-23038
CombiSteamer V6000 45M PowerSteam	23041	CSM6T-23041
CombiSteamer V6000 45	23043	CS6T-23043
CombiSteamer V6000 45F	23045	CS6T-23045
CombiSteamer V6000 45L Grand	23046	CS6T-23046
CombiSteamer V6000 45M PowerSteam	23047	CSM6T-23047
CombairSteamer V6000 60	23049	CS6T-23049
Ovens		
Combair V2000 60	21043	C2T-21043
Combair V4000 60	21045	C4T-21045
Combair V6000 60	21047	C6T-21047
Combair V2000 45	21048	C2T-21048
Combair V4000 45	21049	C4T-21049
Combair V6000 45	21050	C6T-21050
Combair V4000 60P	21055	C4T-21055
Combair V6000 60P	21057	C6T-21057
Combair V4000 45P	21058	C4T-21058
Combair V6000 45P	21059	C6T-21059
Combair V6000 45	21067	C6T-21067
Combair V6000 60	21068	C6T-21068
Combair V6000 45P	21070	C6T-21070
Combair V6000 60P	21073	C6T-21073
Vacuum drawers		
VacuDrawer V6000 14	36004	DV6T-36004
VacuDrawer V6000 14	36005	DV6T-36005
Warming drawers		
WarmingDrawer V4000 14	34026	DW4T-34026
WarmingDrawer V4000 14	34027	DW4T-34027
WarmingDrawer V4000 22	34029	DW4T-34029
WarmingDrawer V4000 28	34030	DW4T-34030
WarmingDrawer V4000 31	34031	DW4T-34031



Model designation	Model number	Type
System drawers		
Drawer V2000 14	35005	DS2T-35005
Automatic built-in coffee machines		
CoffeeCenter V6000 45	25005	COC6T-25005
Hobs		
CookTop V6000 I905	31114	CTI6T95MMSOLD
CookTop V4000 I604	31115	CTI4T64MMSOLD
CookTop V4000 I704	31116	CTI4T74MMSOLD
CookTop V6000 I705 FullFlex	31132	CTI6T-31132
CookTop V6000 I906 FullFlex	31134	CTI6T-31134
CookTop Teppan Yaki I40	31140	CTI2T-31140
CookTop V4000 I904	31142	CTI4T-31142
CookTop V4000 I402	31144	CTI4T-31144
Induction hob with integrated hood		
CombiCookTop V2000 I804	31095	CCT2T-31095
CombiCookTop V4000 I804	31096	CCT4T-31096
Gas hobs		
GAS411 multi-slider	31063	GAS411GSBZ
GAS421 multi-slider	31064	GAS421GSBZ
GAS641 multi-slider	31071	GAS641GSBZ
GAS951 multi-slider	31072	GAS951GSBZ
GAS731 dial controls	31075	GAS731GKBZ
Special hoods		
DSTS9 downdraft hood	64004	DSTS9g
DSMS downdraft hood	64005	DSMS
Built-in range hoods		
AiroClearCabinet V4000	64009	AE4T-64009
AiroClearCabinet V4000	64010	AE4T-64010
AiroClearCabinet V4000	64011	AE4T-64011
Dishwashers		
AdoraDish V2000	41108	AS2T-41108
AdoraDish V6000	41118, 41120, 41121	AS6T-41118, AS6T-41120, AS6T-41121
Refrigerators		
CombiCooler V6000 Supreme	51096	CCO6T-51096
Cooler V6000 Supreme	51098	CO6T-51098
Winecoolers		
WineCooler V6000 Supreme	51097	WC6T-51097
WineCooler V4000 90	51102	WC4T-51102
Freezers		
Freezer V6000 Supreme	51099	FR6T-51099

1.4 Positions of electrical connections


For EURO kitchens, allowance from the floor can vary. In this case, the electrical connection should be calculated using the dimension from the bottom edge of the appliance.

Oven above an oven

With this combination, an electrical connection should be provided for each appliance. Depending on the installation height and the type of combination, the connections may be located at different heights.

Wall hoods with telescopic casing

The electrical connection must pass between the exhaust air piping and the lagging sheets. The measurements given in the table ensure that this condition is met.

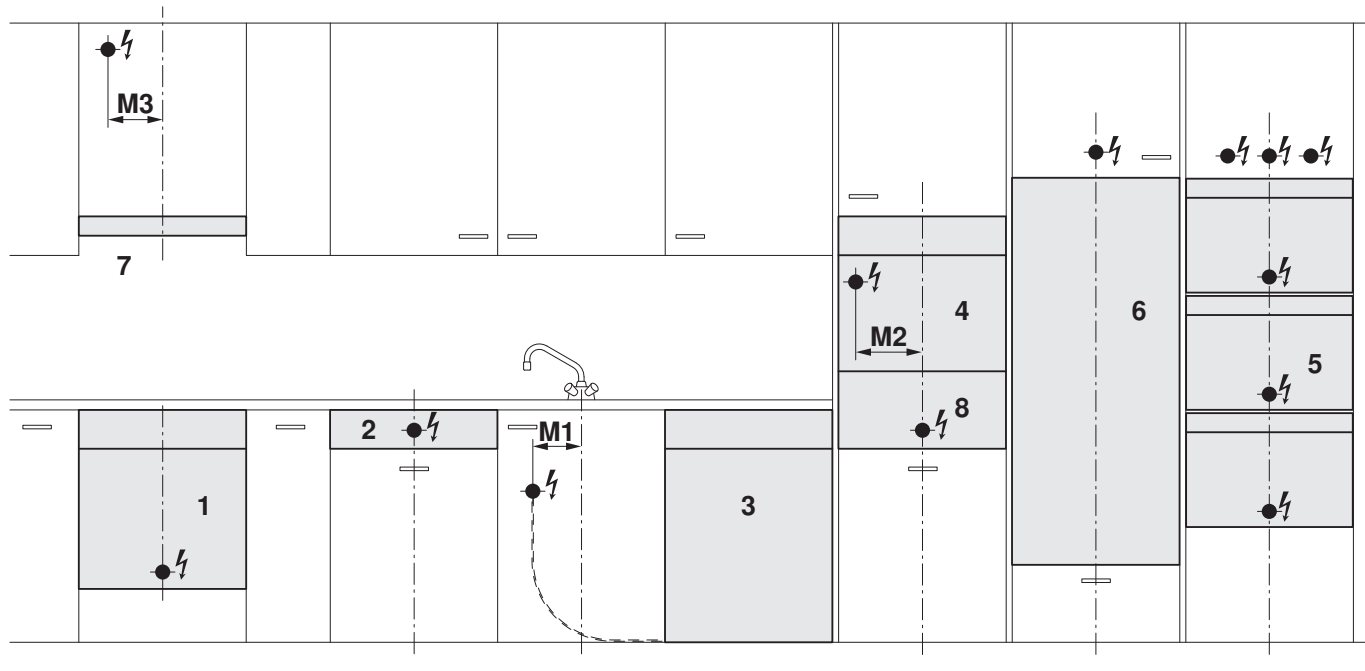

- 1 Oven/Steamer in base unit
- 2 Autarchic hob
- 3 Dishwasher/Refrigerator in base unit
- 4 Automatic built-in coffee machine / Microwave oven
- 5 Oven / Steamer / Microwave oven, also in combination
- 6 Refrigerator, winecooler in tall unit
- 7 Range hood
- 8 Drawers (warming drawer / vacuum drawer / system drawer)

- M1 Distance from centre to dishwasher/refrigerator connection in base unit
- M2 Distance from centre to connection for automatic built-in coffee machine / Microwave (option)
- M3 Distance from centre to range hood connection

 **Provide additional clearance for electrical connections if the installation niche has only the minimum depth.**

1.5 Built-in EURO

No.	Designation	Connection from appliance support	Connection in niche	Type of connection
1	Oven, steamer (height 600 mm)	max. 30 mm (for plinth height 100 mm)	Centre	I
2	Autarchic hob	—	Centre	I
3	Dishwasher	—	M1 = 160 mm	U
	Refrigerator in base unit	—	M1 = 160 mm	U
4	Oven, steamer (height 600 mm)	max. 30 mm	Centre	I
	Oven, steamer (height 380 mm / 450 mm)	max. 30 mm	Centre	I
	Microwave oven (height 380 mm)	max. 300 mm	Centre, M2 = 225 mm (option)	I, U
	Microwave oven (height 450 mm)	max. 400 mm	Centre, M2 = 225 mm (option)	I
	Automatic built-in coffee machine	max. 300 mm	M2 = 225 mm	I, U
5	Double combination (height 600 mm) Triple combination variants	max. 30 mm	Centre	I, U
6	Refrigerator, winecooler in tall unit up to and including 12/6, EURO 1530 mm	—	Centre	U
	Refrigerator in tall unit from 13/6, EURO 1540 mm			
8	Warming drawer, vacuum drawer	—	Centre	U

I See separate installation instructions

M1 Distance from centre to dishwasher/refrigerator connection in base unit




M2 Distance from centre to connection for automatic built-in coffee machine / Microwave (option)

U Flush power socket 220–240 V


1.6 Front dimensions of Excellence appliances

Manufacturing tolerance: ±1 mm


Oven/Steamer in tall unit

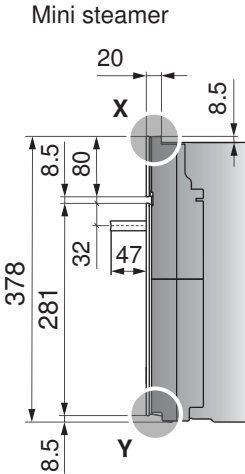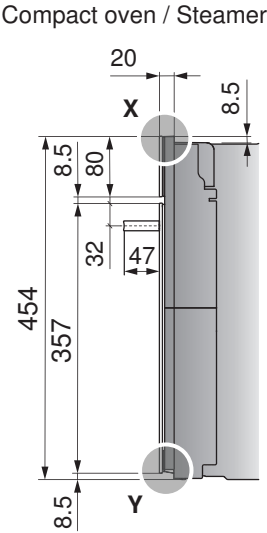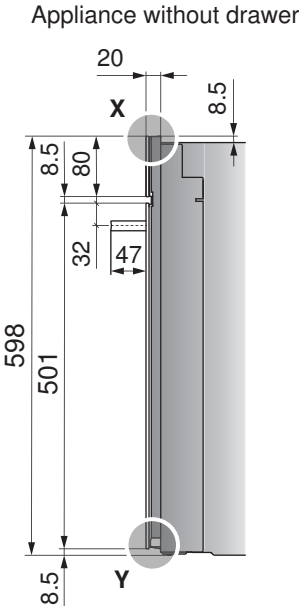

Detail X






Detail Y



- E Appliance height
- F Niche height
- G Overlap

Vacuum, warming and system drawer

Appliance height H	Door glass height H2
310	301.5
281	272.5
218	209.5
160	151.5
142	133.5
74	65.5

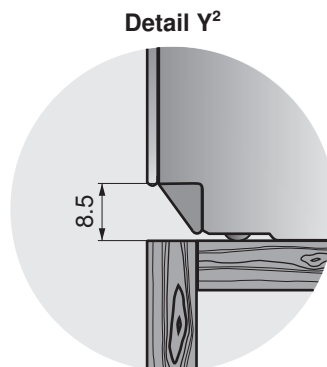

2 Steam cookers

Only use if water hardness >3° French hardness (>1.7° German hardness).

2.1 General notes



Efficient repairs can only be guaranteed if it is possible to uninstall the whole appliance at any time without causing any damage.

The niche and gap dimensions given below must be observed to ensure proper ventilation.

2.2 Electrical connection data



General information on the electrical connections and an overview of the positions can be found in section Overview of connections, ranges and dimensions (see page 5).

Appliance	Model number	Mains connection	Fuse	Rated load	Mains cable
CombairSteamer V2000 60	23036	220–240 V~ 50 Hz	16 A	3700 W	min. 1.8 m, with plug
CombairSteamer V6000 60	23038, 23049				
CombiSteamer V4000 45	23031				
CombiSteamer V6000 45	23032, 23033, 23043, 23045				
CombiSteamer V6000 45L Grand	23034, 23046				
Steamer V4000 45	23026				
CombiSteamer V6000 45M Power- Steam**	23041, 23047	220–240 V~ 50 Hz	16 A	3700 W	min. 1.8 m, without plug
CombiSteamer V6000 45M PowerSteam			25 A***	5100 W	
			400 V 2N~ 50 Hz	16 A	

** The CombiSteamer V6000 45M PowerSteam can also be operated with a single-phase connection (230 V~/16 A). For performance reasons (less power means longer cooking times), it should, where possible, be connected with a two-phase connection.


*** This appliance complies with the requirements of IEC 61000-3-12. If the appliance is to be fitted with a 25 amp fuse, this must be activated in the appliance settings.

2.3 Excellence Line 90 cm

CombiSteamer

CombiSteamer V6000 45L Grand, niche height 450

Valid for the following models: 23034, 23046

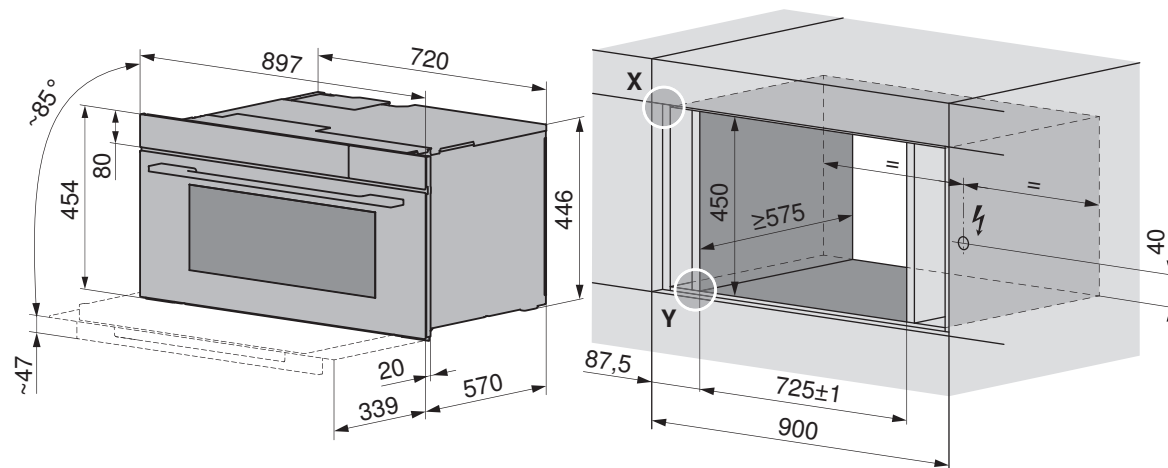


Front dimensions of the appliances: Detail X/Y (see page 10)

2.4 Excellence Line 60 cm

CombairSteamer

CombairSteamer V2000/V6000 60, niche height 600

Valid for the following models: 23036, 23038, 23049

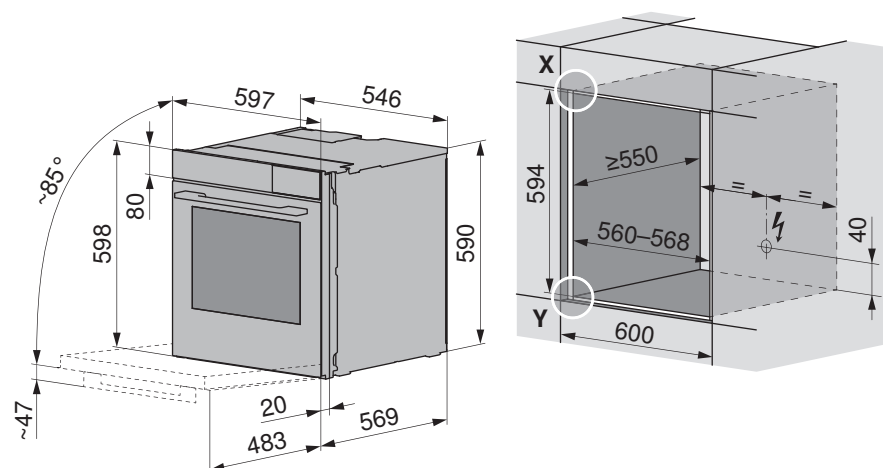


Front dimensions of the appliances: Detail X/Y (see page 10)

CombiSteamer/Steamer

CombiSteamer V6000 45M PowerSteam, CombiSteamer V4000/V6000 45 and Steamer V4000 45, niche height 450

Valid for the following models: 23026, 23031, 23032, 23041, 23043, 23047

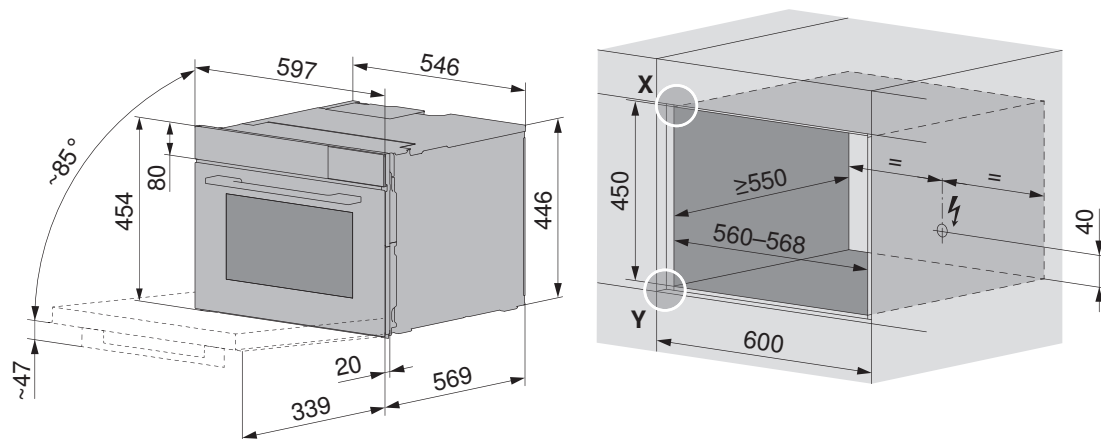


Front dimensions of the appliances: Detail X/Y (see page 10)




CombiSteamer with fixed water connection

CombiSteamer V6000 45F, niche height 450

Valid for the following models: 23033, 23045

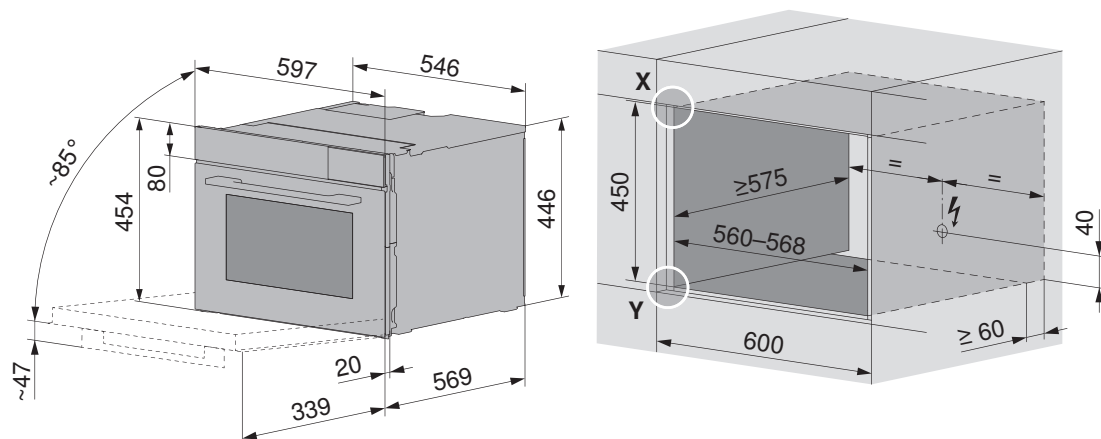

Front dimensions of the appliances: Detail X/Y (see page 10)

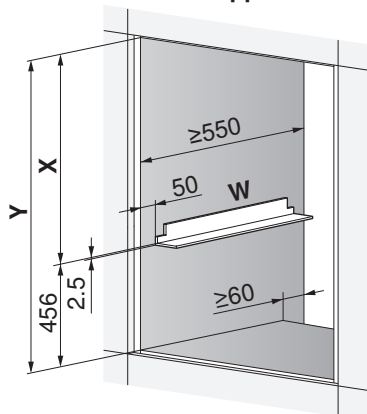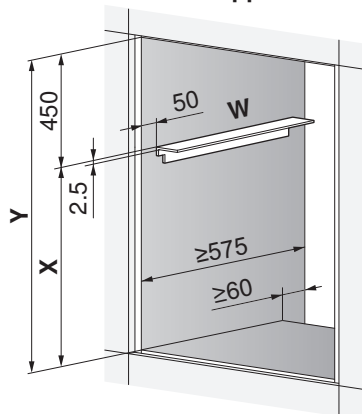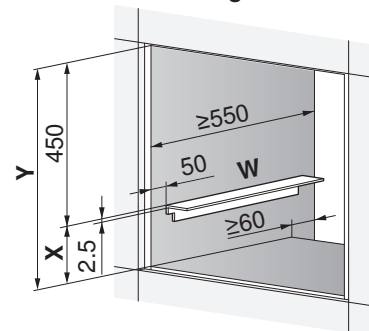Below second appliance

Above second appliance

Above warming drawer


X = Height of second appliance

Y = Niche height


W = Angle set K50572




For an installation depth of under 575 mm, it is recommended that the appliance be installed below other appliances for space reasons.

If installing with a second appliance in the same niche, use the angle set W (K50572).

Installation

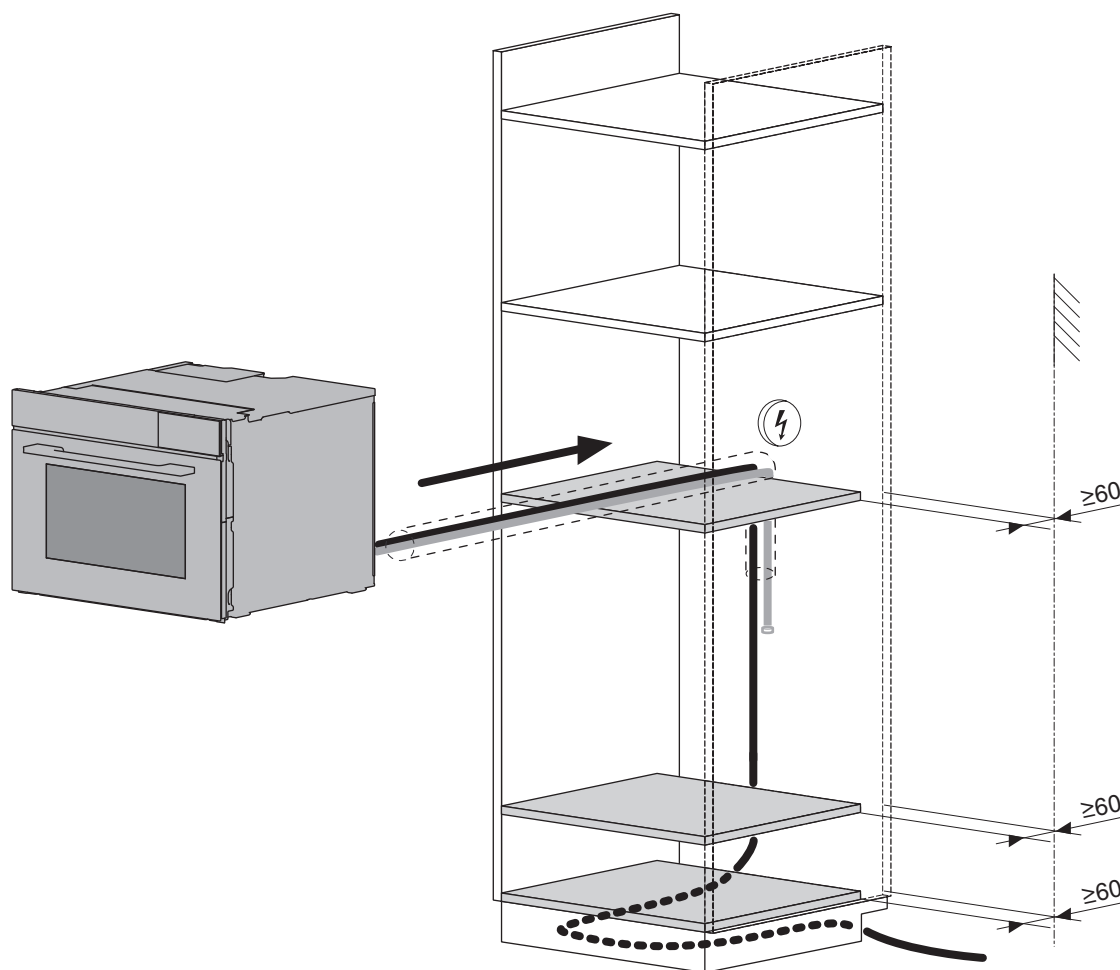

Plumbing in

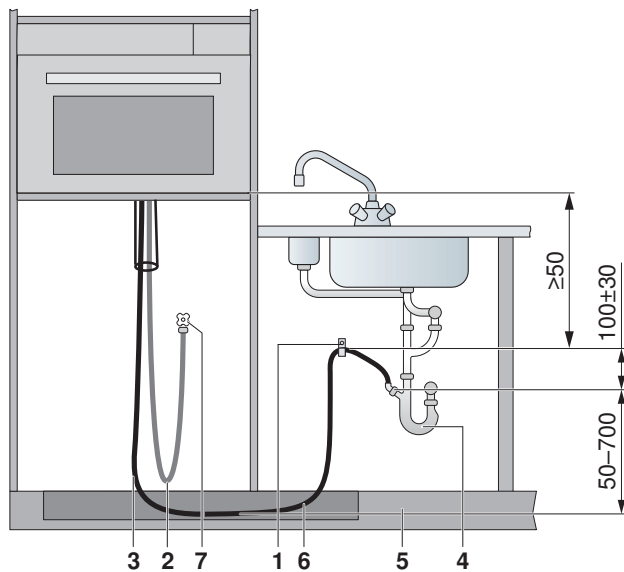

- 1 Hose clamp
- 2 Reinforced inlet hose 2 m, G 3/4"
- 3 Drain hose 3 m, internal diameter of connection 22 mm

On-site installations


- 4 Drain trap
- 5 Plinth panel
- 6 Hose fed through plinth
- 7 Cold water connection with stopcock

Drain

- Length of drain hose: 3 m. An optional 5 m drain hose (Art. no. 1012933) can be ordered if required.



The mounted drain hose must not be lengthened or shortened. The drop from the bottom of the appliance to the drain trap must be at least 50 mm. Install the drain hose without kinks and without any pressure or tension on it.



Cold water connection inlet


Operating pressure: 0.1–1.0 MPa (1–10 bar)

Only use if water hardness >3° French hardness (>1.7° German hardness).

Length of reinforced hose: 2 m



Observe local water authority regulations. Existing hoses that are defective must be replaced. The inlet hose must not be shortened or damaged. Should the flexible inlet hose not be long enough, then a rigid extension of the on-site installation is required. The stopcock must be accessible at all times.

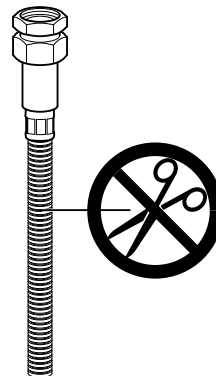

3 Ovens

3.1 General notes



Efficient repairs can only be guaranteed if it is possible to uninstall the whole appliance at any time without causing any damage.

The niche and gap dimensions given below must be observed to ensure proper ventilation.

3.2 Electrical connection data



General information on the electrical connections and an overview of the positions can be found in section Overview of connections, ranges and dimensions (see page 5).


Appliance	Model number	Mains connection	Fuse	Connection cable	Mains cable
Combair V2000 45	21048	220–240 V~ 50 Hz	16 A	3400 W	min. 1.8 m, without plug
Combair V4000 45/45P	21048, 21058				
Combair V6000 45/45P	21050, 21059, 21067, 21070				
Combair V2000 60	21043				
Combair V4000 60/60P	21045, 21055				
Combair V6000 60/60P	21047, 21057, 21068, 21073				

3.3 Excellence Line 60 cm

Oven

Combair V2000 60, Combair V4000/V6000 60/60P, niche height 600

Valid for the following models: 21043, 21045, 21047, 21055, 21057, 21068, 21073

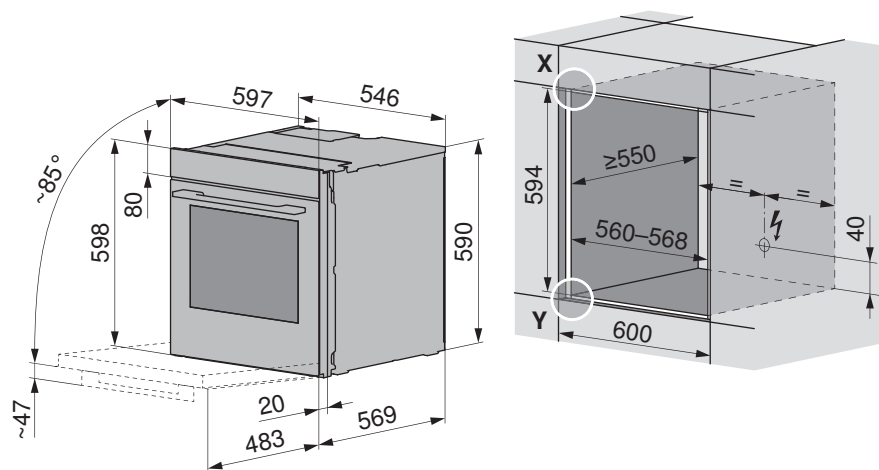


Front dimensions of the appliances: Detail X/Y (see page 10)

Compact oven

Combair V2000 45, Combair V4000/V6000 45/45P, niche height 450

Valid for the following models: 21048–21050, 21058, 21059, 21067, 21070

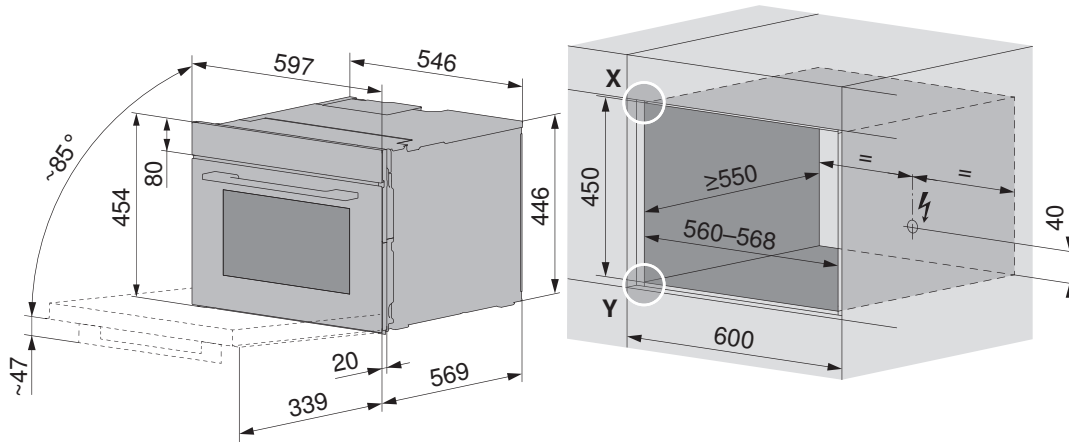

Front dimensions of the appliances: Detail X/Y (see page 10)

4 Vacuum drawers, warming drawers & system drawers

4.1 General notes



Efficient repairs can only be guaranteed if it is possible to uninstall the whole appliance at any time without causing any damage.

4.2 Electrical connection data



Plan a separate inlet for the electrical connection for each appliance.



General information on the electrical connections and an overview of the positions can be found in section Overview of connections, ranges and dimensions (see page 5).

Appliance	Mains connection	Fuse	Rated load	Mains cable
Vacuum drawers	220–240 V~ 50 Hz	10 A	320 W	1.7 m, with plug
Warming drawers			810 W	

4.3 Vacuum drawers



The Angle set for combination possibilities and Anti-tip set for VacuDrawer V6000 (see page 110) are not included in the scope of delivery.

An Anti-tip set for VacuDrawer V6000 (see page 110) must be ordered if there is a **CoffeeCenter** or **no** appliance is installed above the vacuum drawer.




For installation next to warming drawer, order Trim kit (edge protection) (see page 109) at the same time.




For installation with a CombiSteamer with fixed water connection, an installation depth of ≥ 575 mm must be taken into CombiSteamer with fixed water connection (see page 14).


DV6T-36004 Built-in solo

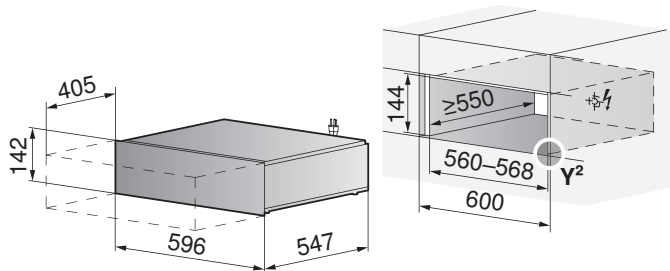


DV6T-36005 Built-in solo, fully integrated

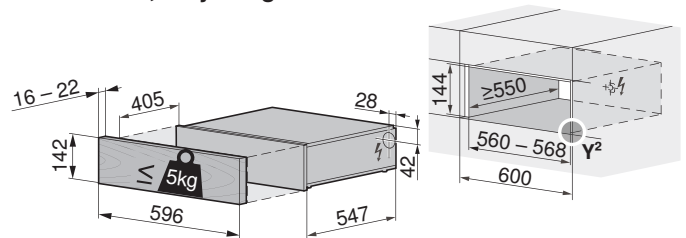

Installing with compact oven or steamer

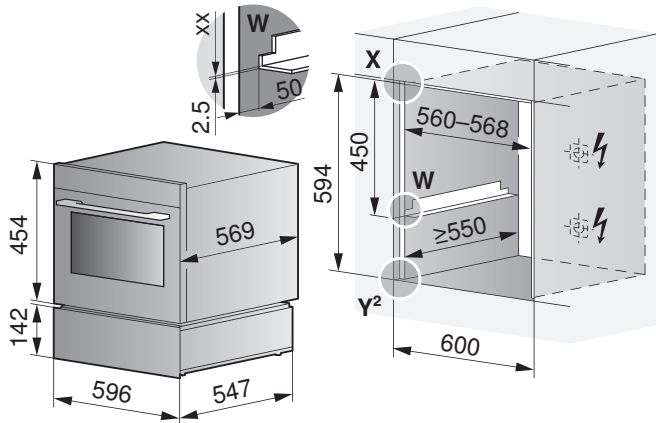

Installing with oven & compact oven or steamer

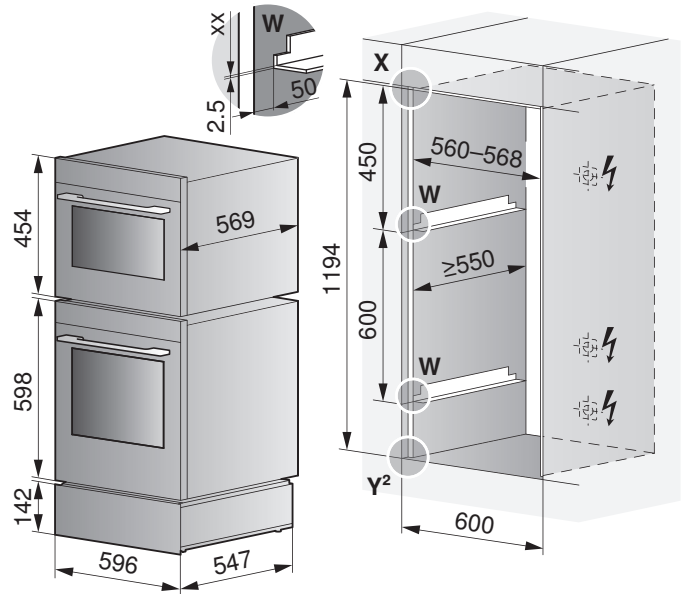

Front dimensions of the appliances: Front dimensions of Excellence appliances (see page 10)


Installing the vacuum drawer below the kitchen worktop correctly



Do not install appliance behind a cabinet door.

If the kitchen worktop protrudes too far out from the cabinet, it could collide with the **glass lid** of the vacuum drawer. Observe the dimensions table.

Design integrated

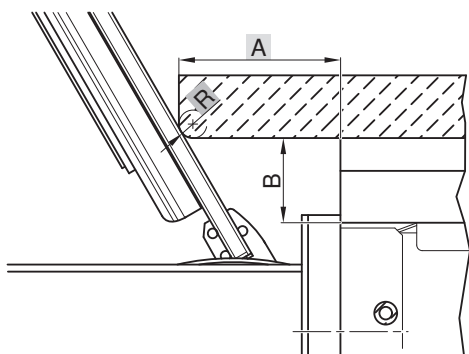


		R [mm]					
		0	2	4	6	8	10
A [mm]	36	5.528					
	38	8.992	7.528	6.064			
	40	12.456	10.992	9.528	8.064	6.600	5.136
	42	15.920	14.456	12.992	11.528	10.064	8.600
	44	19.384	17.920	16.456	14.992	13.528	12.064
	46	22.848	21.384	19.920	18.456	16.992	15.528
	48	26.313	24.848	23.384	21.920	20.456	18.992
	50	29.777	28.313	26.848	25.384	23.920	22.456
	52	33.241	31.777	30.313	28.848	27.384	25.920
	54	36.705	35.241	33.777	32.313	30.848	29.384
	56	40.169	38.705	37.241	35.777	34.313	32.848
	58	43.633	42.169	40.705	39.241	37.777	36.313
	60	47.097	45.633	44.169	42.705	41.241	39.777

B [mm]



Fully integrated

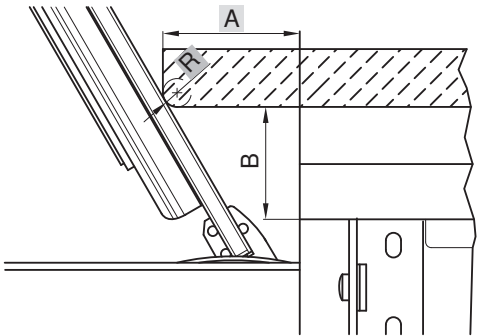

		R [mm]						
		0	2	4	6	8	10	
A [mm]	24	7.850	6.386					B [mm]
	26	11.314	9.850	8.386	6.922	5.458		
	28	14.778	13.314	11.850	10.386	8.922	7.458	
	30	18.243	16.778	15.314	13.850	12.386	10.922	
	32	21.707	20.243	18.778	17.314	15.850	14.386	
	34	25.171	23.707	22.243	20.778	19.314	17.850	
	36	28.635	27.171	25.707	24.243	22.778	21.314	
	38	32.099	30.635	29.171	27.707	26.243	24.778	
	40	35.563	34.099	32.635	31.171	29.707	28.243	
	42	39.027	37.563	36.099	34.635	33.171	31.707	
	44	42.491	41.027	39.563	38.099	36.635	35.171	
	46	45.955	44.491	43.027	41.563	40.099	38.635	
	48	49.419	47.955	46.491	45.027	43.563	42.099	

Special installation situations can be obtained here.




4.4 Warming drawers



The mounting angles are not included in the scope of delivery. Order angle set K50572 at the same time.


DW4T-34026

Built-in solo

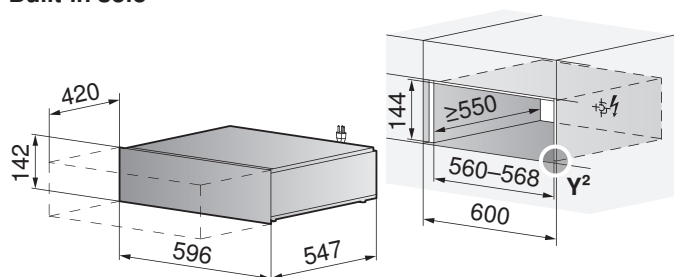


DW4T-34027


Built-in solo, fully integrated

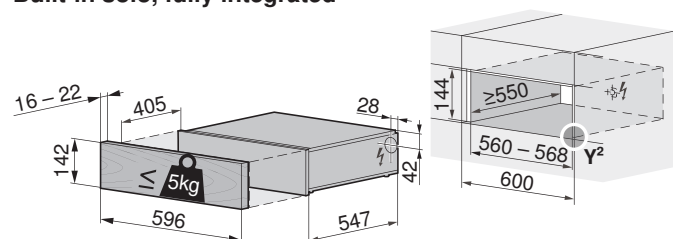

Installing with compact oven or steamer

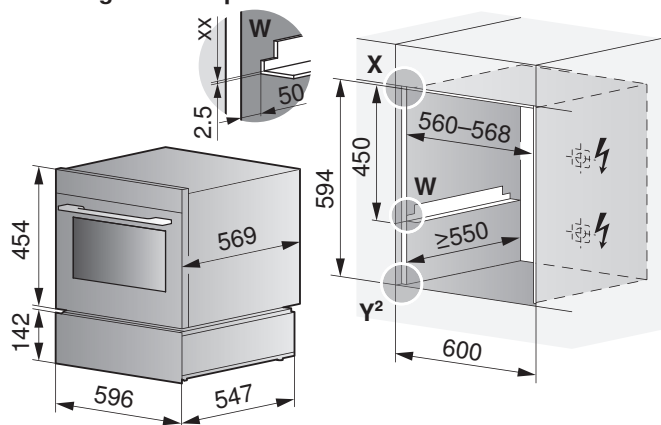


Installing with oven & compact oven or steamer

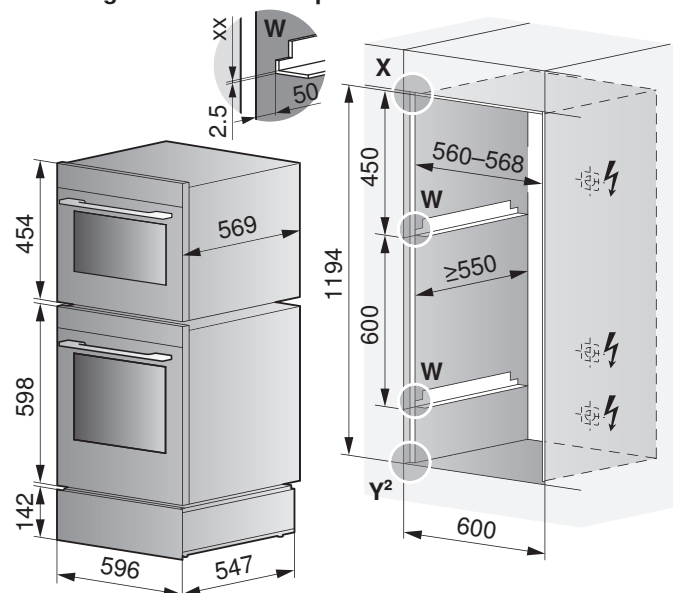


Front dimensions of the appliances: Detail X/Y²

DW4T-34029

Built-in solo

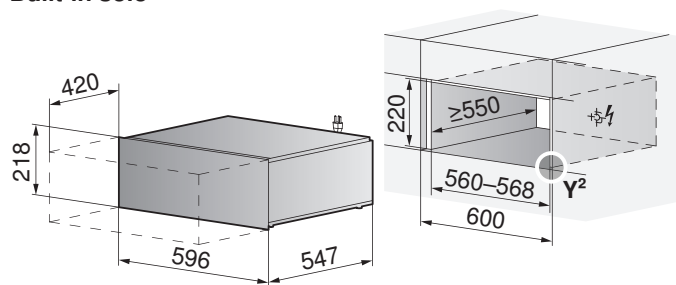


Installing with steamer

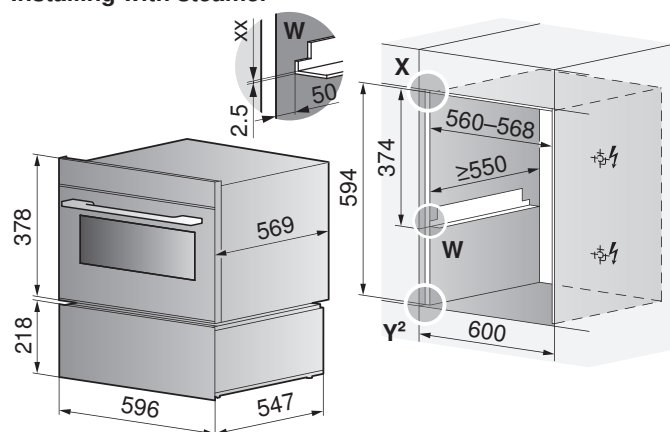


DW4T-34030

Built-in solo

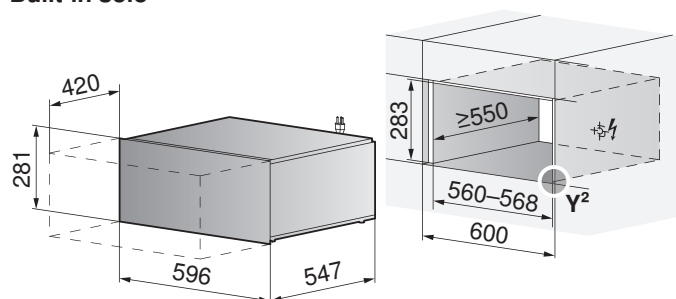


Installing with an oven

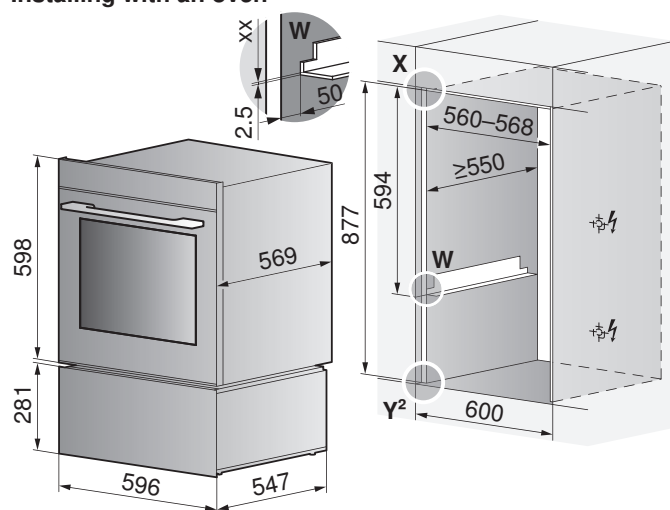


Front dimensions of the appliances: Detail X/Y²

DW4T-34031

Built-in solo

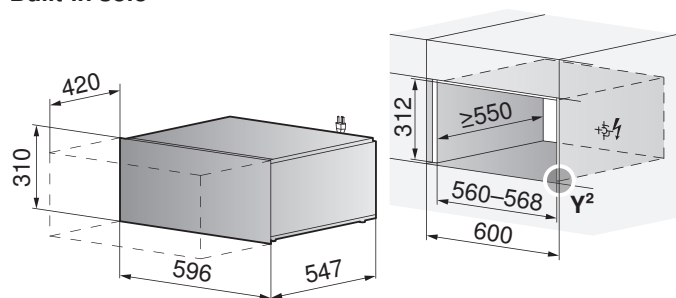

Installing with an oven

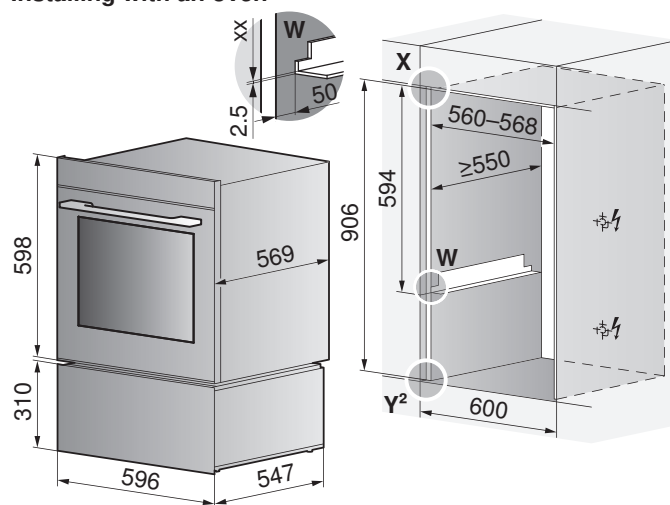


Front dimensions of the appliances: Detail X/Y²

4.5 System drawers

DS2T-35005

Installing with coffee-center

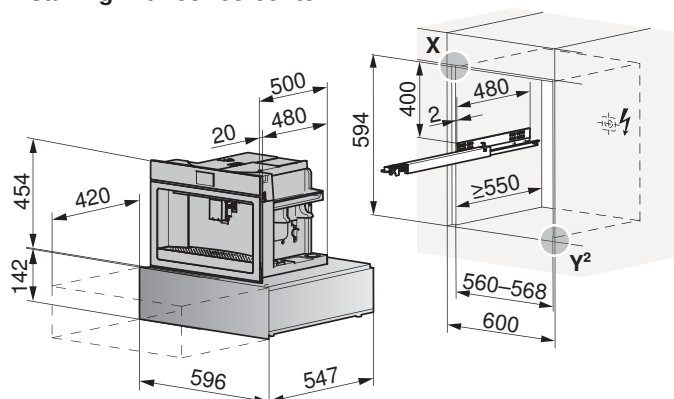

Front dimensions of the appliances: Detail X/Y² (see page 10)



The telescopic runner for the assembly and operation of the coffee-center is included in the scope of delivery of the coffee-center.



5 Automatic built-in coffee machines

 Depth of fitted unit must be at least 530 mm.

5.1 General notes

 Efficient repairs can only be guaranteed if it is possible to uninstall the whole appliance at any time without causing any damage.


5.2 Electrical connection data

 General information on the electrical connections and an overview of the positions can be found in section Overview of connections, ranges and dimensions (see page 5).


Mains connection	Fuse	Rated load	Mains cable
220–240 V~ 50–60 Hz	10 A	1350 W	1.8 m, with plug

5.3 Front dimensions

Detail Z



5.4 CoffeeCenter V6000 45 (25005)

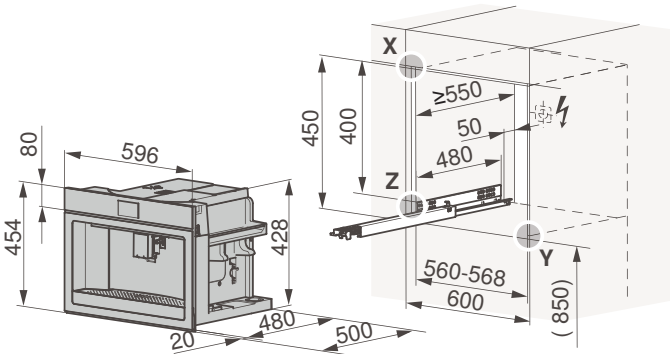

Front dimensions of the appliances: Detail X/Y (see page 10) and Detail Z (see page 26)

6 Combination possibilities




General information on the electrical connections and an overview of the positions can be found in section Overview of connections, ranges and dimensions (see page 5).

6.1 Oven & steam cooker




If installing with a second appliance in the same niche, use angle set **W** (K50572).

Oven & compact oven / steamer

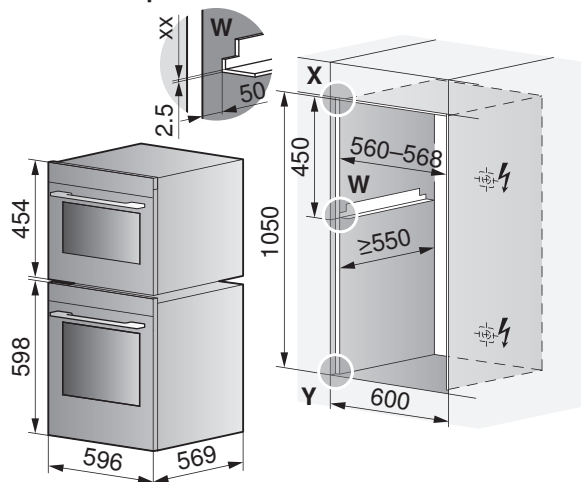


Oven & compact oven & steamer

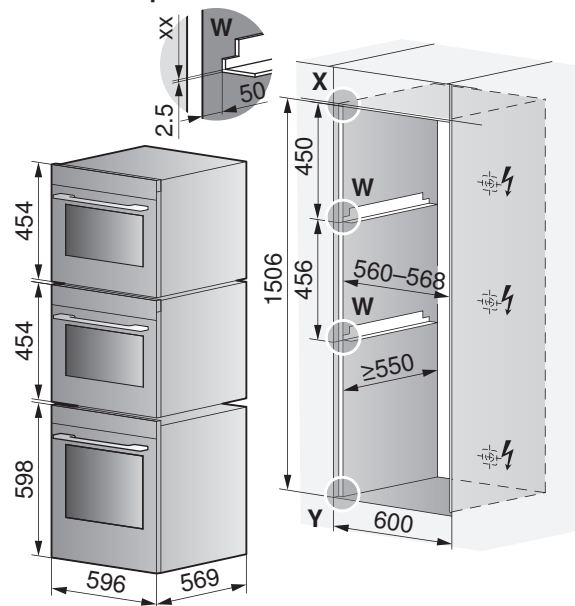

Front dimensions of the appliances: Detail X/Y (see page 10)

Compact oven & steamer

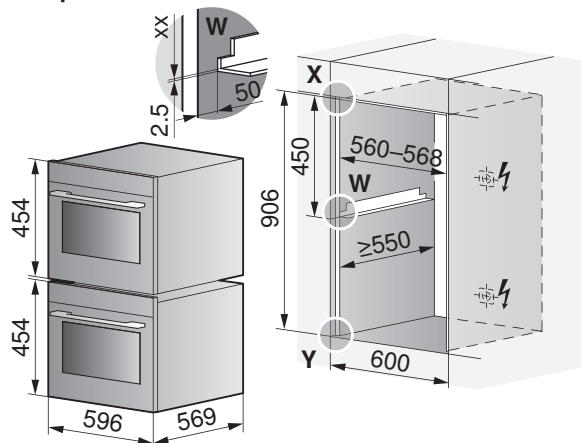


Front dimensions of the appliances: Detail X/Y (see page 10)



If installing with a second appliance in the same niche, use angle set **W** (K50572).

CombiSteamer V6000 45L Grand – Installation in double niche

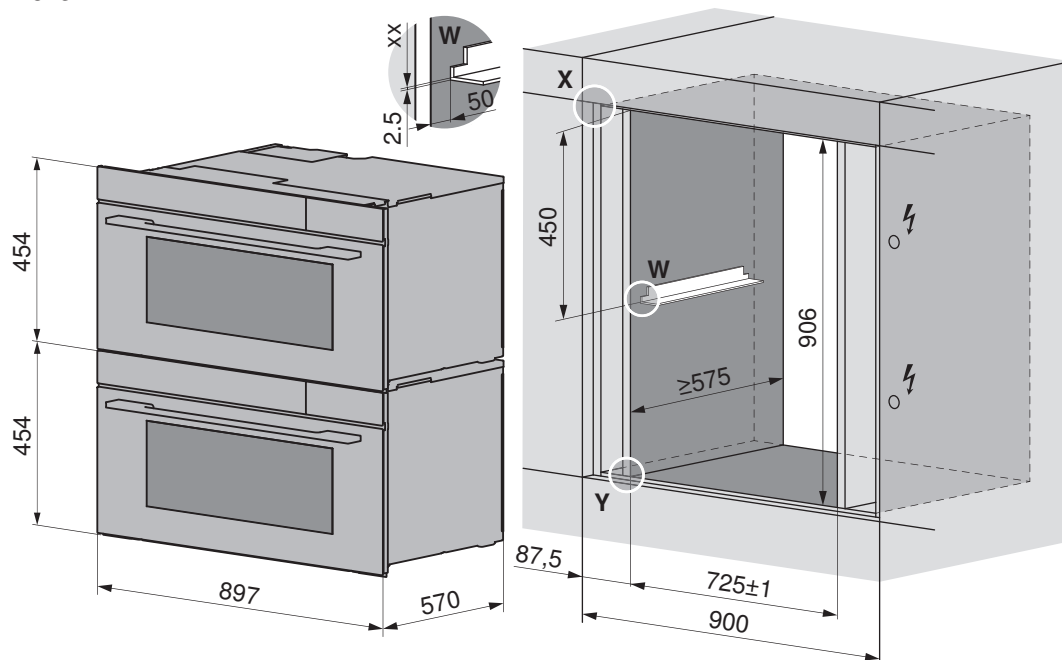


Front dimensions of the appliances: Detail X/Y (see page 10)

6.2 Oven & automatic built-in coffee machine




The telescopic runner for the assembly and operation is included in the scope of delivery.

CoffeeCenter V6000 45 & oven

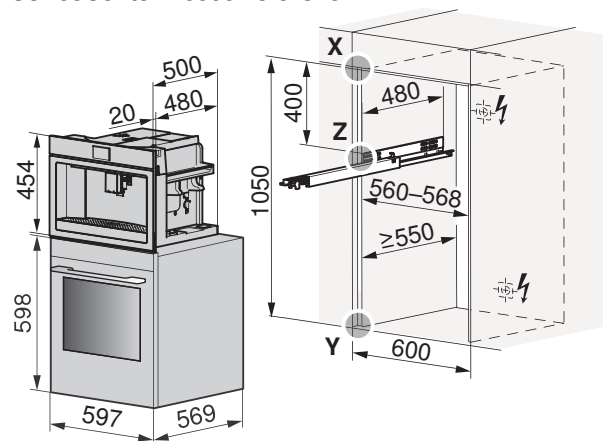

CoffeeCenter V6000 45 & compact oven / steamer

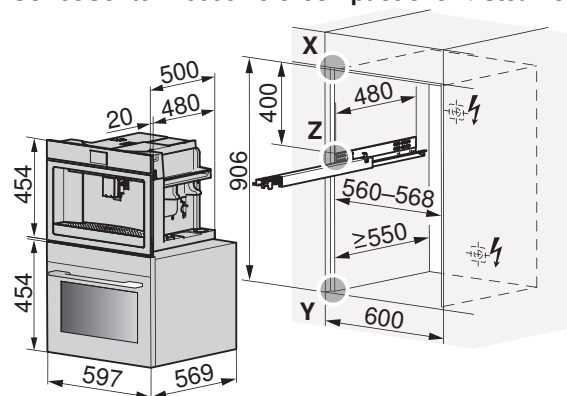

Front dimensions of the appliances: Detail X/Y (see page 10) and Detail Z (see page 26)

7 CookTop glass ceramic hobs

7.1 General notes



Induction hobs require adequate ventilation (see page 30).

If a drawer is installed directly underneath, a protective plate is recommended in the vicinity of the mains cable and to protect the ventilation openings. The ventilation protective plate set can be used for this purpose. Accessories (see page 111).



Efficient repairs can only be guaranteed if it is possible to uninstall the whole appliance at any time without causing any damage.

The layout of the hobs to be installed may differ from the hobs illustrated here!

7.2 OptiGlass coating

Halogen or LED light bulbs are recommended for illuminating hobs with the OptiGlass coating. The use of fluorescent tube lighting to illuminate hobs with the OptiGlass coating causes the glass surface to shimmer.

7.3 Electrical connection data




General information on the electrical connections and an overview of the positions can be found in section Overview of connections, ranges and dimensions (see page 5).

Appliance	Mains connection	Fuse	Rated load	Mains cable
CookTop Teppan Yaki I40	220–240 V~ 50–60 Hz	16 A	2800 W	1.7 m, without plug
CookTop V4000 I402			3700 W	
CookTop V4000 I604/I704		32 A	7400 W	
CookTop V4000 I904	220–240 V~ 50–60 Hz	32 A	7400 W	
CookTop V6000 I905, CookTop V6000 I906 FullFlex	220–240 V~ 50–60 Hz	32 A	7400 W	
		48 A	11100 W	
	380–415 V 3N~ 50–60 Hz	16 A		
CookTop V6000 I705 FullFlex	220–240 V~ 50–60 Hz	32 A	7400 W	

7.4 Ventilation

For installation of a V-ZUG induction hob, the following minimum requirements apply:


1. The hot air exhaust should be provided by a ventilation slit of $\geq 2 \text{ mm}$ at the front.
2. A space of $\geq 10 \text{ mm}$ in height is required beneath the appliance.
3. Not only exhaust air but also replacement air in the cabinet should be taken into account. There are different ways to do this, including :
 - a) The rear panel of the base unit must be open around the work surface cut-out to guarantee continuous air circulation through the ventilation slits. The air must be drawn in from outside the cabinet and be able to circulate freely from inside the cabinet to the hob. The lower plinth must not be hermetically sealed. This can be achieved through a shadow gap at the plinth panel or through the use of a ventilation grille.
 - b) Alternatively, a concealed fresh air supply can ensure air circulation inside the cabinet. In order that enough cold air can be drawn in, there must be a continuous circulation of fresh air that extends outside the cabinet. The lower drawer panel should therefore not hermetically seal the cabinet.

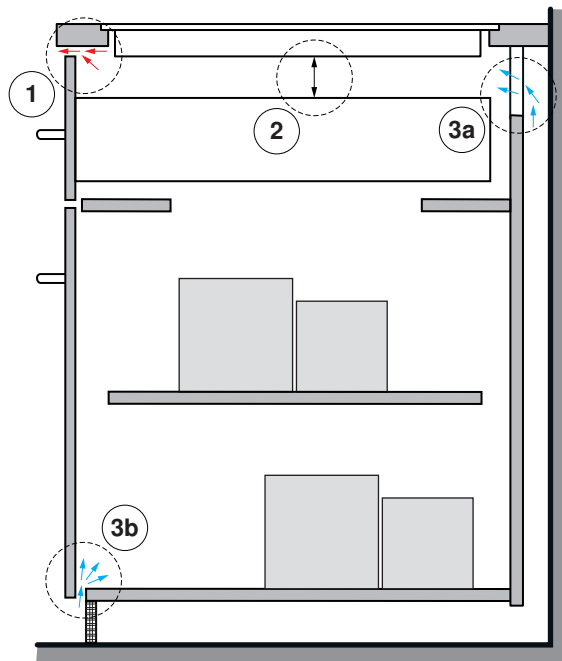

Recommendation

If the hob is being used at the power limit, a reduction in power after a certain amount of time is normal. All induction hobs available on the market can be observed to work in the same way. Should, through cooking behaviour, such an instance occur more often, performance can be improved by optimizing ventilation. To this end, the installation of a ventilation protective plate with seal is generally recommended (see page 45).

Ventilation protective plates only achieve the desired effect with the seal in place. The foam seals are available separately so that protective plates from other manufacturers can be retrofitted (see page 111).

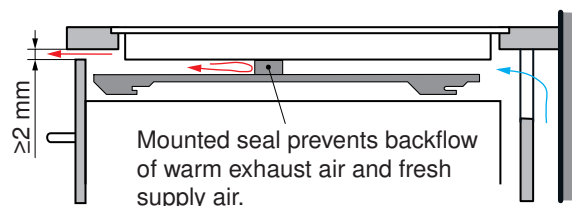

7.5 Surface-mounted installation with «DualDesign»





The installation of a ventilation protection plate with seal is strongly recommended.





- Corner radii of cut-out, aim for ≤ 5 mm
- Corner radii of appliance 2 mm

CookTop V6000 I906 FullFlex (31134)

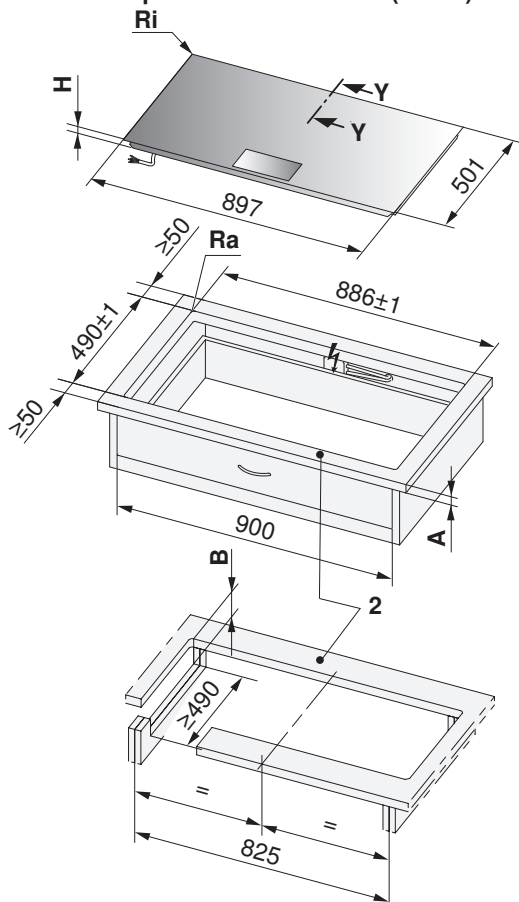

CookTop V6000 I705 FullFlex (31132)

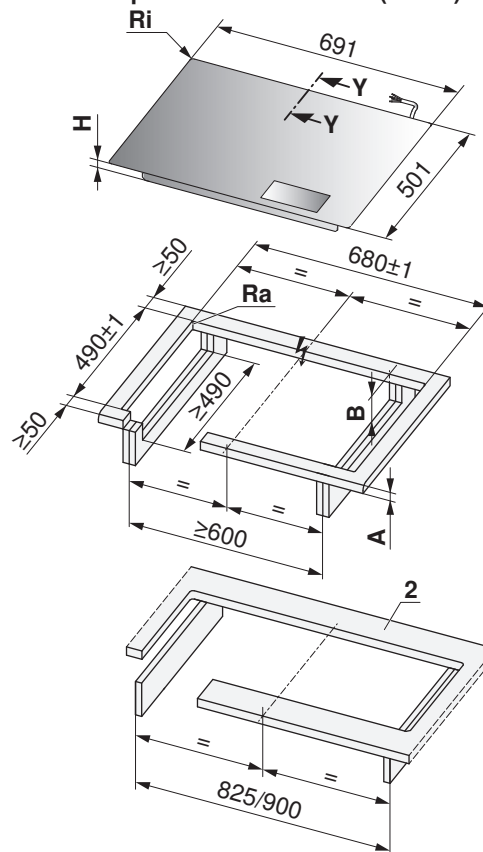

* The required clearance must be observed!

- 2 The front and rear pegs are reinforced underneath. The strut width is determined by the producer of the stone worktop. The minimum peg width can vary according to the properties of the stone.

Type	A Depends on producer	B	H	Corner radius Ra/Ri
CookTop V6000 I906 FullFlex, CookTop V6000 I705 FullFlex	≤ 40 mm	≥ 82 mm	72 mm	5/2 mm



- A** Worktop depth
B Required clearance for service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the hob
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet
T Ventilation protective plate
U Air inlet



Surface-mounted installation with «DualDesign»



- Corner radii of cut-out, aim for ≤5 mm
- Corner radii of appliance 2 mm

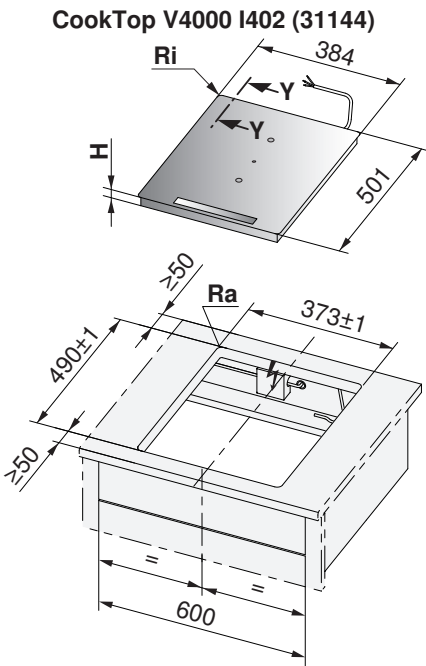

* The required clearance must be observed!

Type	B	H	Corner radius Ra/Ri
CookTop V4000	≥61.7 mm	51.7 mm	5/2 mm



- B** Required clearance for ventilation and service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the hob (ventilation opening)
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet

Surface-mounted installation with «DualDesign»



- Corner radii of cut-out, aim for ≤ 5 mm
- Corner radii of appliance 2 mm

CookTop Teppan Yaki I40 (31140)

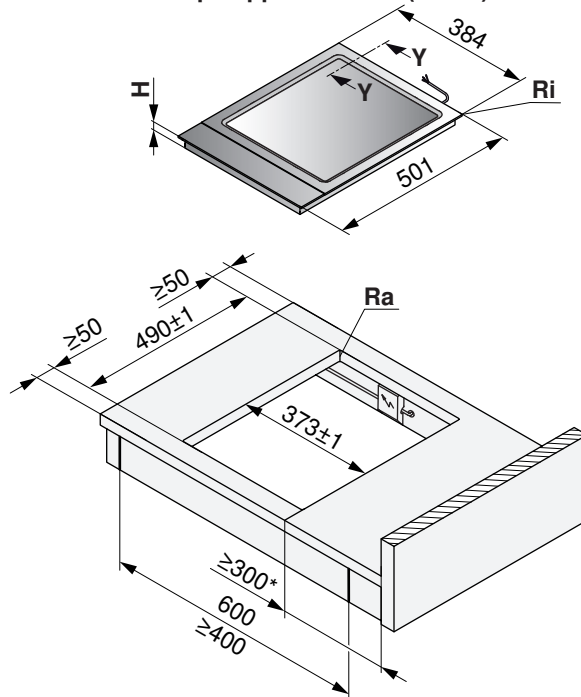

* On both sides for technical reasons.


Type	B	H	Corner radius Ra/Ri
CookTop Teppan Yaki	≥ 74 mm	64 mm	0–5/2 mm

- B** Required clearance for ventilation and service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the hob (ventilation opening)
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet
T Side panel

Combination installation

For surface-mounted combination installation, the side strip set 1028587 and the intermediate support 1014361 (stainless steel) or 1019199 (black) are needed.

- The side strips must be fixed on the left-hand and right-hand side of the appliance with four screws on each side.

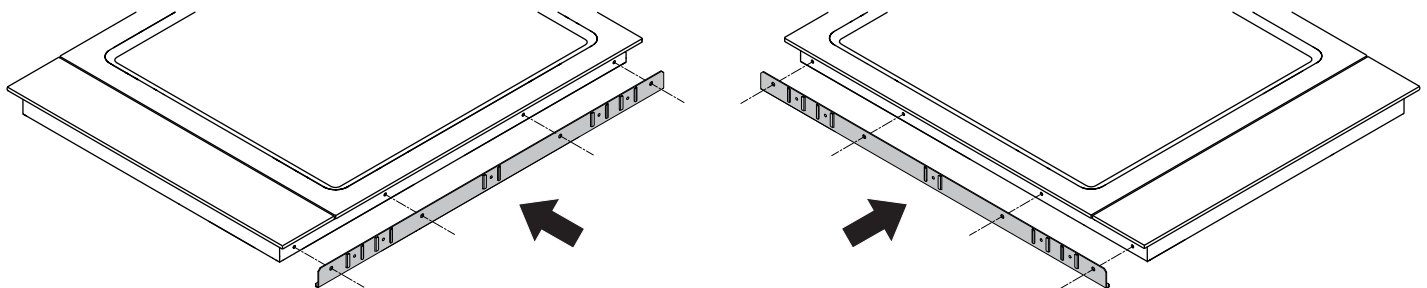

Surface-mounted combination installation is described in document 1013773.




Surface-mounted installation with «DualDesign»





- Corner radii of cut-out, aim for ≤5 mm
- Corner radii of appliance 2 mm

CookTop V4000 I604 (31115)

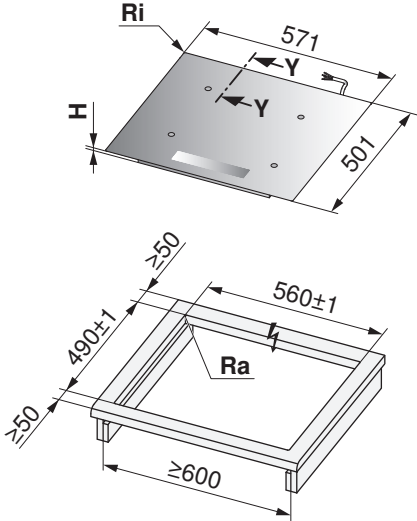

CookTop V4000 I704 (31116)

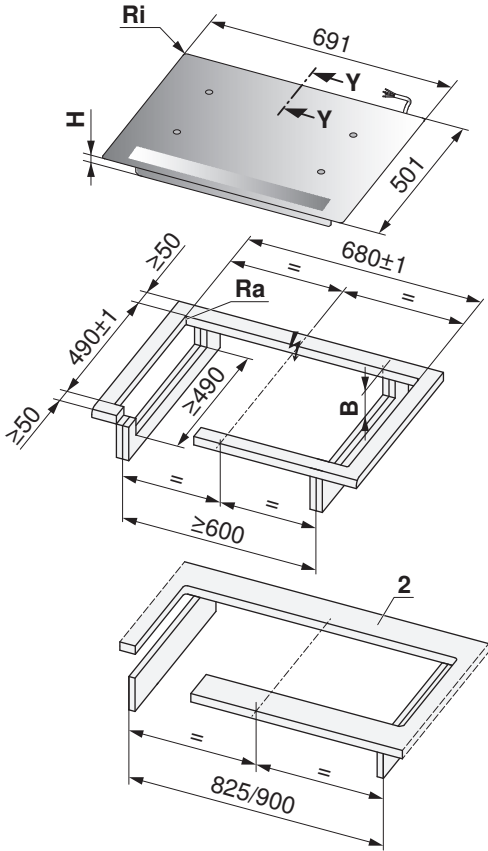

* The required clearance must be observed!

- 2 The front and rear pegs are reinforced underneath. The strut width is determined by the producer of the stone worktop. The minimum peg width can vary according to the properties of the stone.




Type	B	H	Corner radius Ra/Ri
CookTop V4000	≥60 mm	50 mm	5/2 mm

- B** Required clearance for ventilation and service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the hob (ventilation opening)
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet

Surface-mounted installation with «DualDesign»



- Corner radii of cut-out, aim for ≤ 5 mm
- Corner radii of appliance 2 mm

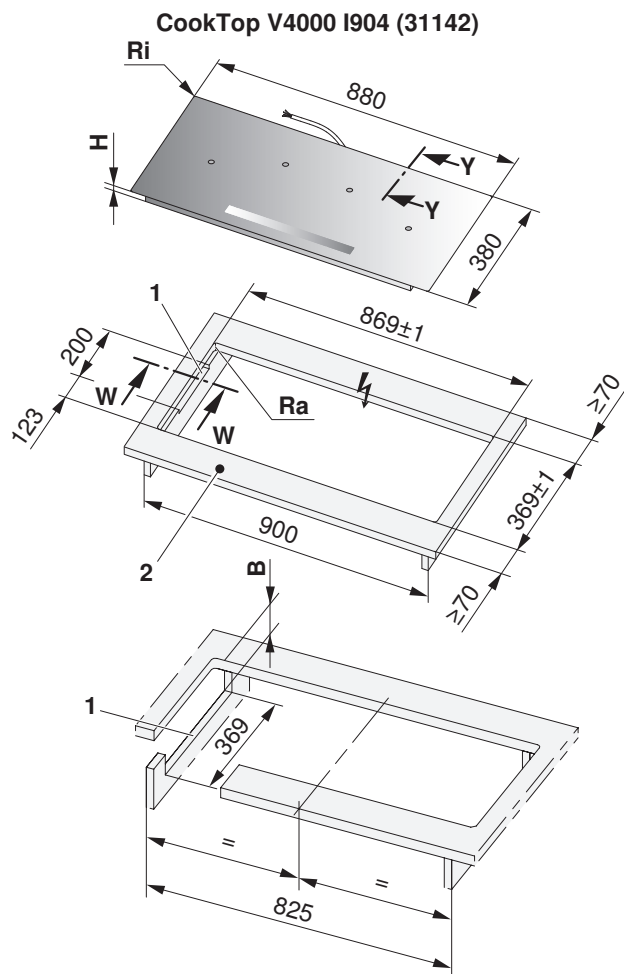

* The required clearance must be observed!

- 1 Mounting cut-outs in side walls left/right for a niche width of ≥ 900 mm, necessary for the ventilation of the appliance.
- 2 The front and rear pegs are reinforced underneath. The strut width is determined by the producer of the stone worktop. The minimum peg width can vary according to the properties of the stone.

Type	B	H	Corner radius Ra/Ri
CookTop V4000	≥ 61 mm	51 mm	5/2 mm



- B** Required clearance for ventilation and service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the hob (ventilation opening)
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet



Surface-mounted installation with «DualDesign»



- Corner radii of cut-out, aim for ≤ 5 mm
- Corner radii of appliance 2 mm

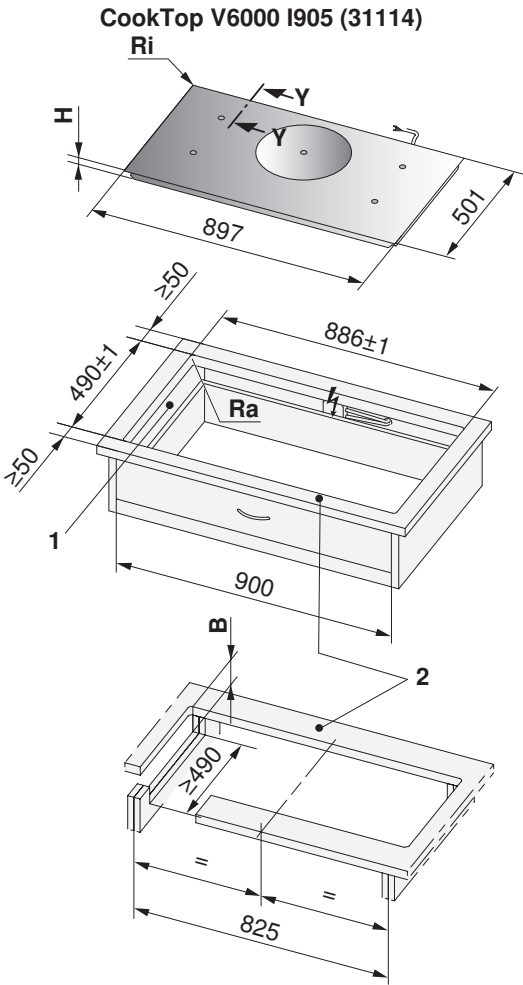

* The required clearance must be observed!

- 1 Mounting cut-outs in side walls left/right for a niche width of ≥ 900 mm, necessary for the ventilation of the appliance.
- 2 The front and rear pegs are reinforced underneath. The strut width is determined by the producer of the stone worktop. The minimum peg width can vary according to the properties of the stone.

Type	B	H	Corner radius Ra/Ri
CookTop V6000	≥ 63.3 mm	53.3 mm	5/2 mm

- B** Required clearance for ventilation and service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the hob (ventilation opening)
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet

7.6 Flush installation with «DualDesign»



Hob must be removable from below!




The installation of a ventilation protection plate with seal is strongly recommended.





- Corner radii of cut-out, aim for ≤ 5 mm
- Corner radii of appliance 2 mm

CookTop V6000 I906 FullFlex (31134)

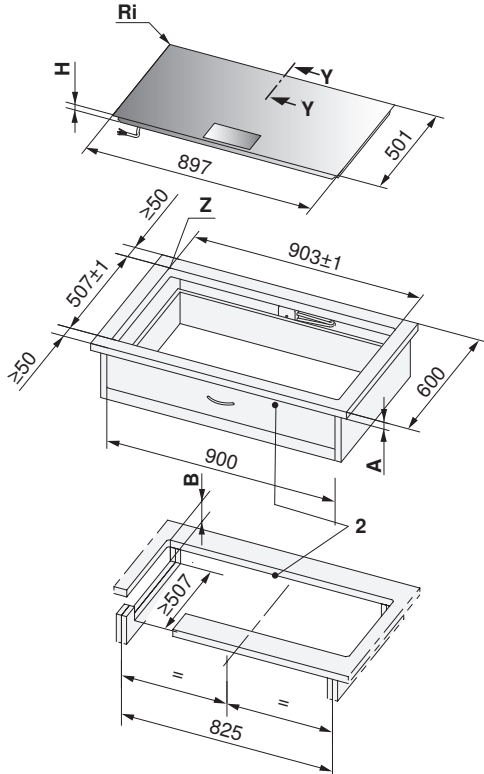

CookTop V6000 I705 FullFlex (31132)

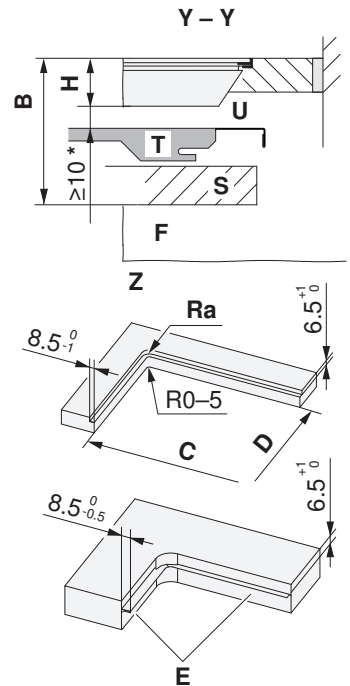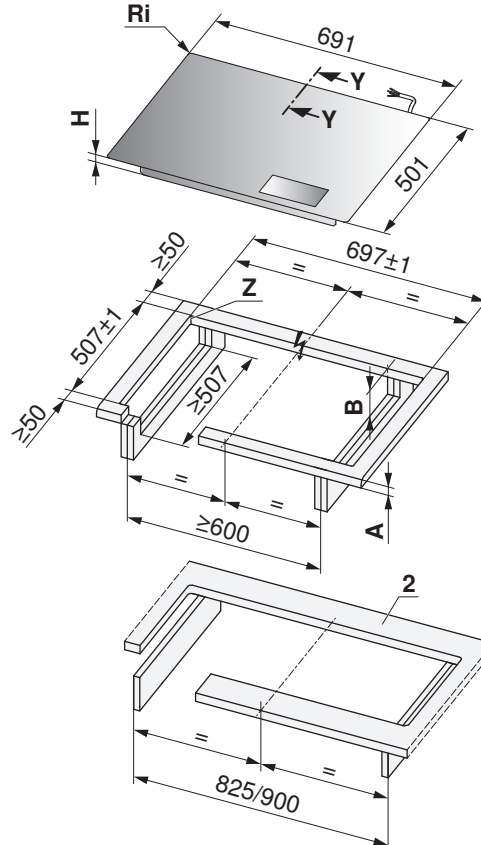

* The required clearance must be observed!

- 2 The front and rear pegs are reinforced underneath. The strut width is determined by the producer of the stone worktop. The minimum peg width can vary according to the properties of the stone.




Type	A Depends on producer	B	C/D	H	Corner radius Ra/Ri
CookTop V6000 I906 FullFlex	≤ 40 mm	≥ 150 mm	886/490 mm	76 mm	5/2 mm
CookTop V6000 I705 FullFlex			680/490 mm		

- A** Worktop depth
B Required clearance for service replacement over the entire cut-out area.
E Steel angle bonded or screw mounted
F Side panel
H Dimension from the top of the work surface to the underside of the hob
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet
T Ventilation protective plate
U Air inlet

Flush installation with «DualDesign»



- Corner radii of cut-out, aim for ≤ 5 mm
- Corner radii of appliance 2 mm

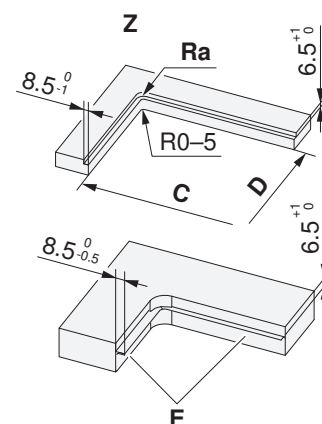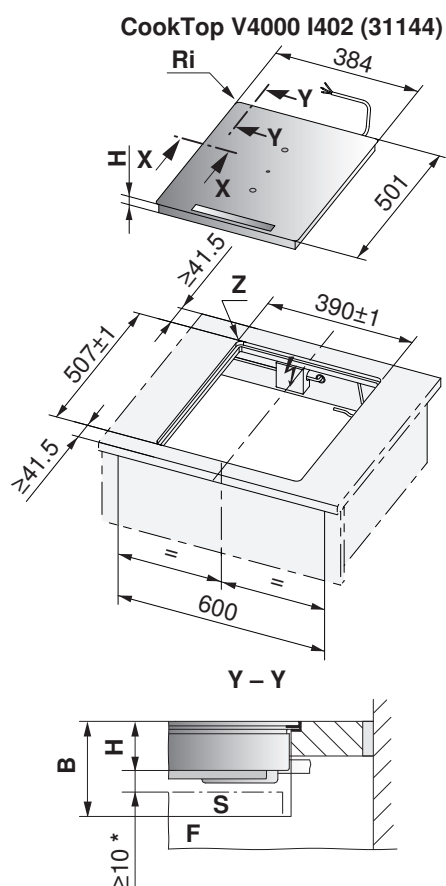

* The required clearance must be observed!


Type	B	C/D	H	Corner radius Ra/Ri
CookTop V4000 I402	≥ 75 mm	373/490 mm	51.7 mm	5/2 mm

- B** Required clearance for ventilation and service replacement over the entire cut-out area.
E Steel angle bonded or screw mounted
F Side panel
H Dimension from the top of the work surface to the underside of the hob (ventilation opening)
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet

Flush installation with «DualDesign»



- Corner radii of cut-out, aim for ≤ 5 mm
- Corner radii of appliance 2 mm

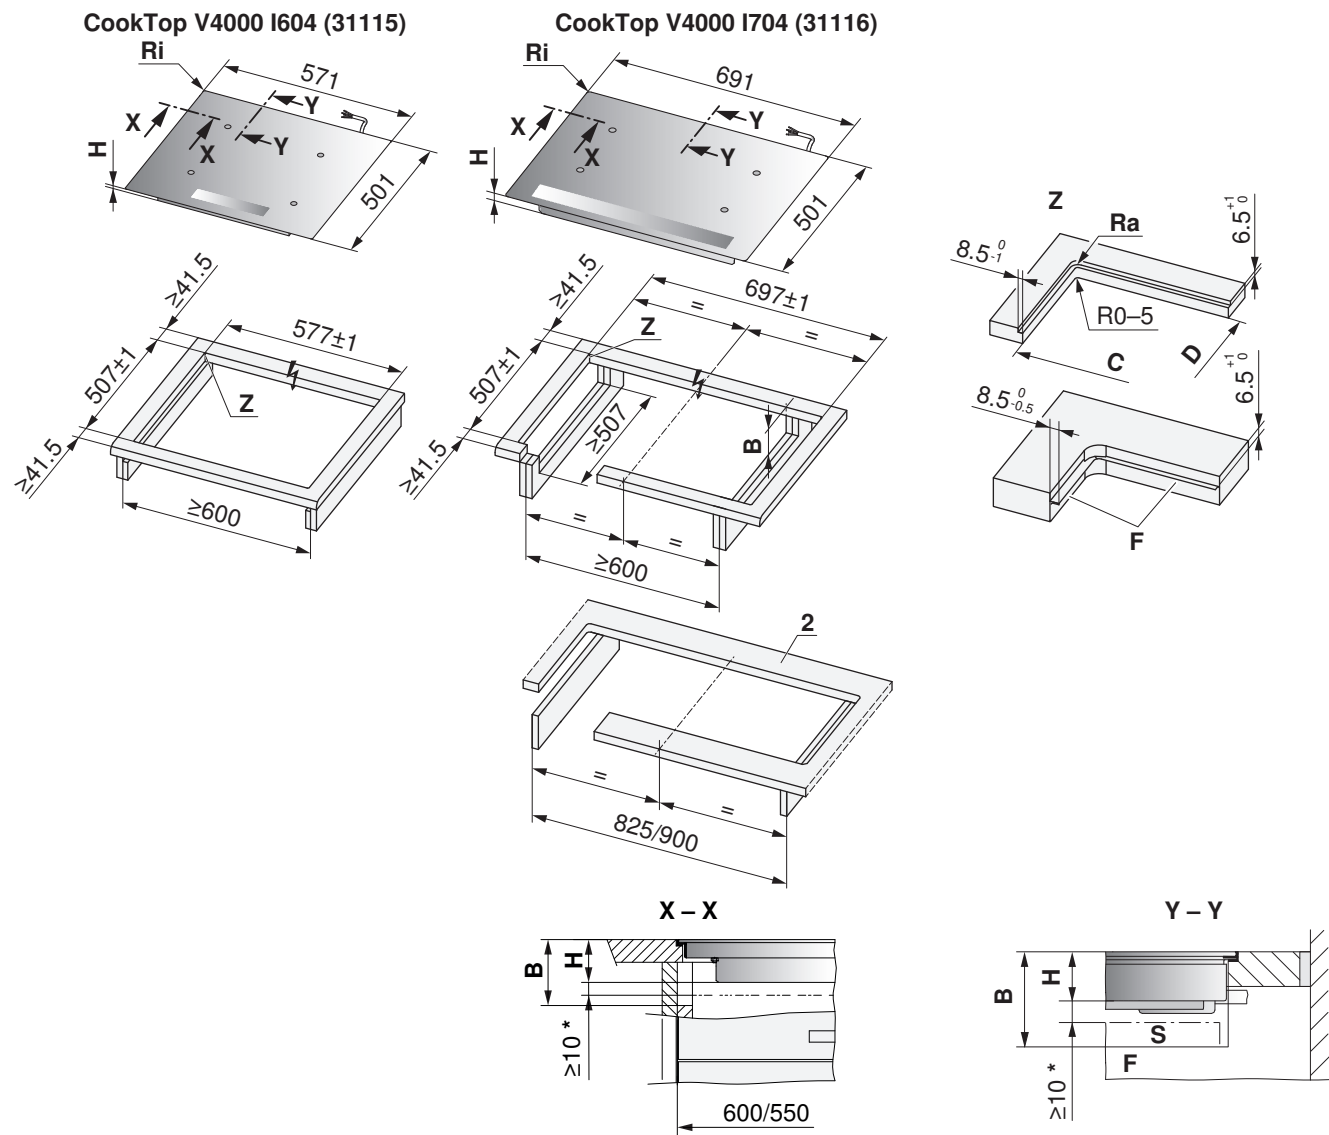

* The required clearance (for ventilation) must be observed!

- 2** The front and rear pegs are reinforced underneath. The strut width is determined by the producer of the stone worktop. The minimum peg width can vary according to the properties of the stone.

Type	B	C/D	H	Corner radius Ra/Ri
CookTop V4000 I604	≥ 75 mm	560/490 mm	51.7 mm	5/2 mm
CookTop V4000 I704		680/490 mm		





- B** Required clearance for ventilation and service replacement over the entire cut-out area.
E Steel angle bonded or screw mounted
F Side panel
H Dimension from the top of the work surface to the underside of the hob (ventilation opening)
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet

Flush installation with «DualDesign»



- Corner radii of cut-out, aim for ≤ 5 mm
- Corner radii of appliance 2 mm

CookTop V4000 I904 (31142)

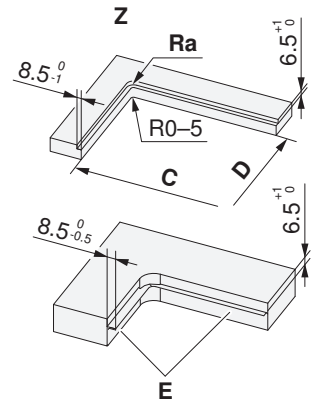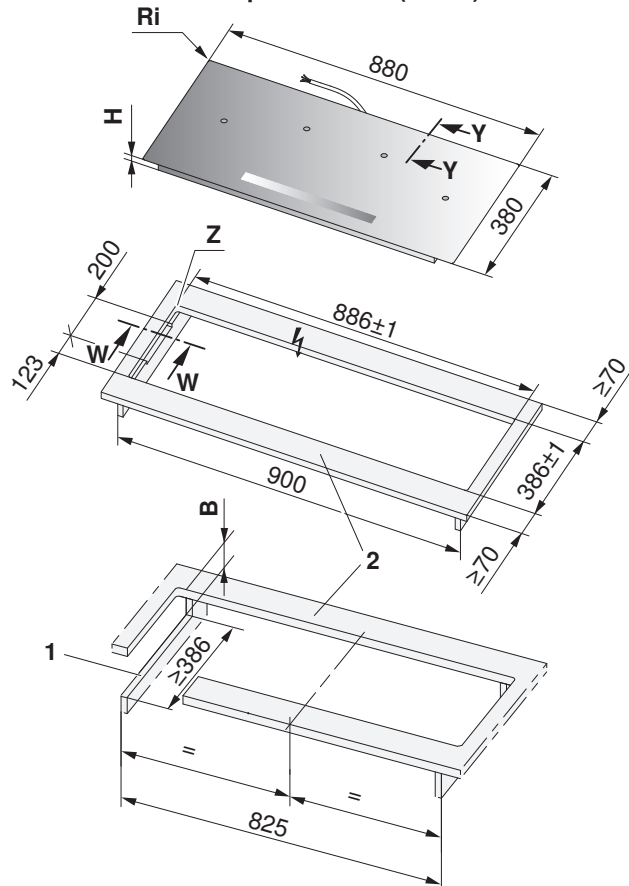

* The required clearance must be observed!

- 1 Mounting cut-outs in side walls left/right for a niche width of ≥ 900 mm, necessary for the ventilation of the appliance.
- 2 The front and rear pegs are reinforced underneath. The strut width is determined by the producer of the stone worktop. The minimum peg width can vary according to the properties of the stone.

Type	B	C/D	H	Corner radius Ra/Ri
CookTop V4000	≥ 75 mm	869/369 mm	51 mm	5/2 mm



- B** Required clearance for ventilation and service replacement over the entire cut-out area.
E Steel angle bonded or screw mounted
F Side panel
H Dimension from the top of the work surface to the underside of the hob (ventilation opening)
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet



Flush installation with «DualDesign»



- Corner radii of cut-out, aim for ≤5 mm
- Corner radii of appliance 2 mm

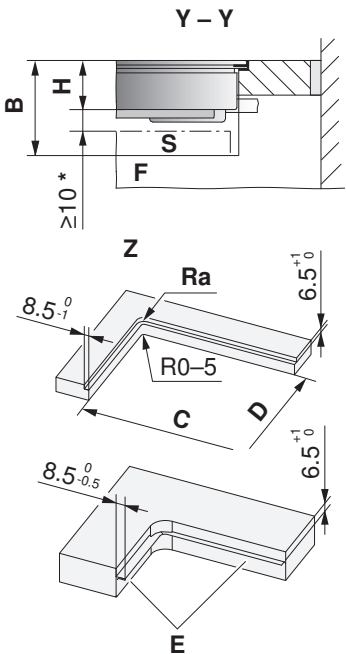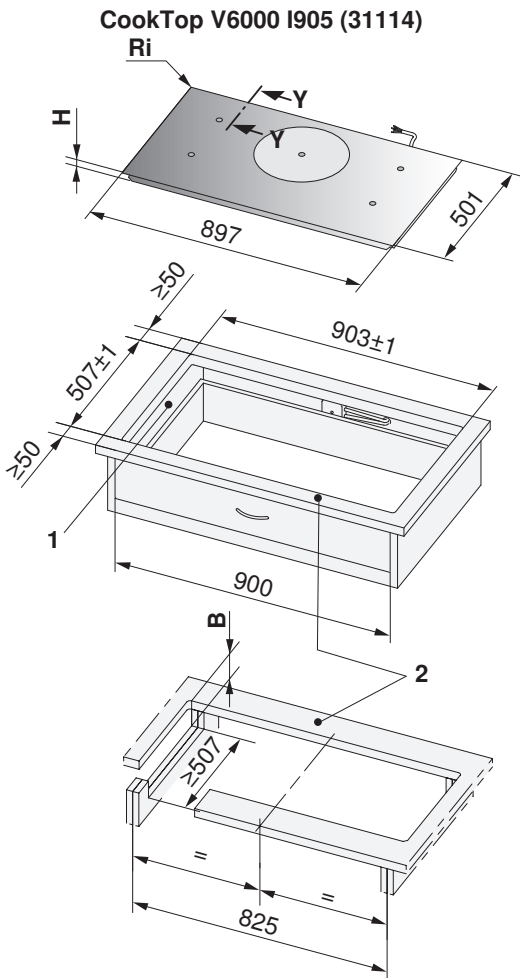

* The required clearance must be observed!

- 1 Mounting cut-outs in side walls left/right for a niche width of ≥900 mm, necessary for the ventilation of the appliance.
- 2 The front and rear pegs are reinforced underneath. The strut width is determined by the producer of the stone worktop. The minimum peg width can vary according to the properties of the stone.

Type	B	C/D	H	Corner radius Ra/Ri
CookTop V6000	≥75 mm	886/490 mm	53.3 mm	5/2 mm


- B** Required clearance for ventilation and service replacement over the entire cut-out area.
E Steel angle bonded or screw mounted
F Side panel
H Dimension from the top of the work surface to the underside of the hob (ventilation opening)
Ra Outer corner radii of cut-out
Ri Corner radii of appliance
S Drawer/Cabinet

7.7 Installation without protective plate




Requirements for optimal ventilation (see page 30).

CookTop V4000 I604 (31115)

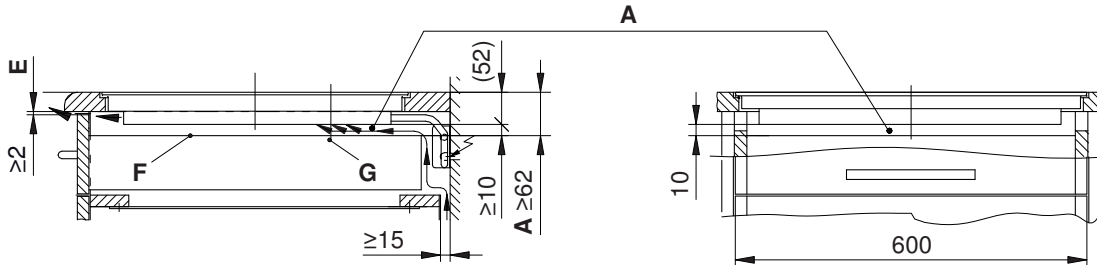


CookTop V4000 I704 (31116)

See diagram above

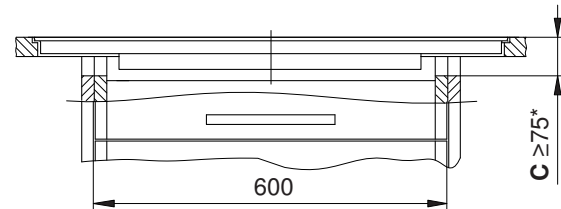

CookTop V6000 I905 (31114)

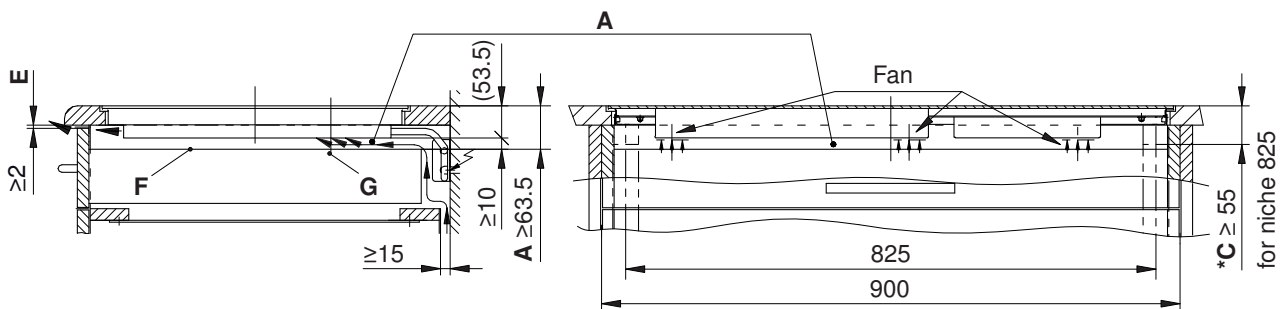

* Required for flush appliances

A Necessary space below the worktop for the ventilation of the appliance

B Cut-out in the side walls left/right is necessary for the ventilation of the appliance.


C Cut-out in the side walls for disassembly from below, only for flush version

E Air gap over entire width of cabinet element


F Drawer

G Fan

CookTop V4000 I904 (31142)

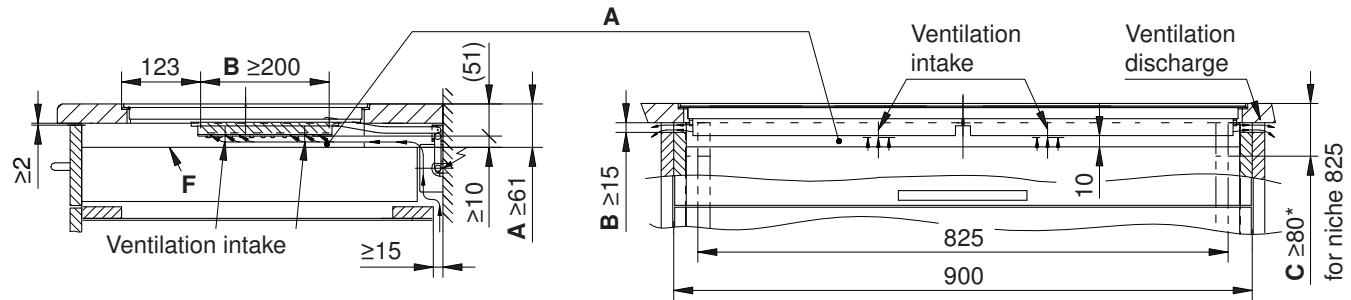

CookTop Teppan Yaki I40 (31140)

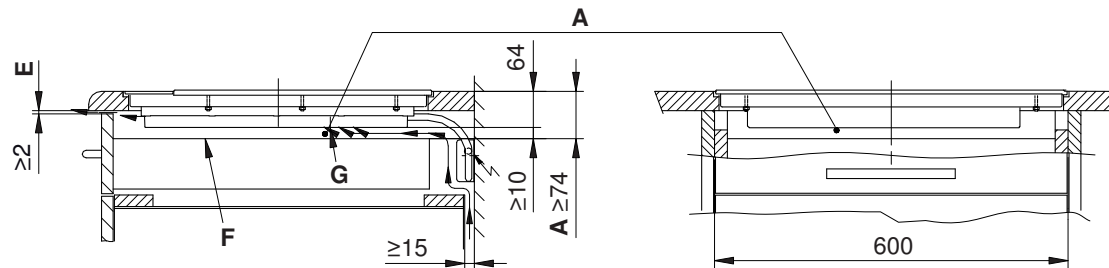

- * Required for flush appliances
- A** Necessary space below the worktop for the ventilation of the appliance
 - B** Cut-out in the side walls left/right is necessary for the ventilation of the appliance.
 - C** Cut-out in the side walls for disassembly from below, only for flush version
 - E** Air gap over entire width of cabinet element
 - F** Drawer
 - G** Fan


7.8 Installation with protective plate

For more information, see the Accessories (see page 108) section.




Requirements for optimal ventilation (see page 30).

CookTop V4000 I604 (31115)

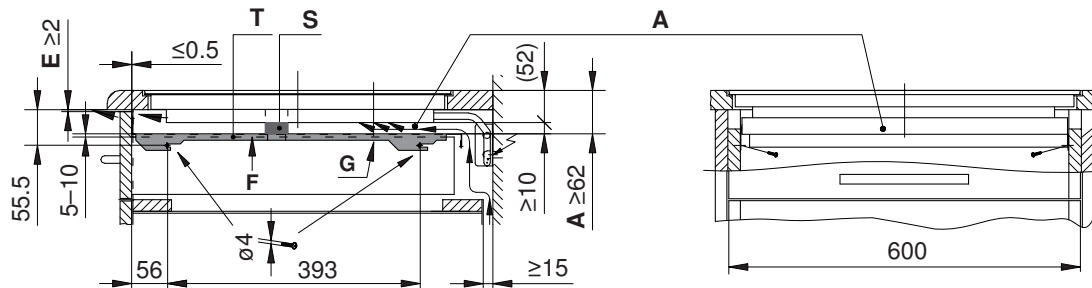


CookTop V4000 I704 (31116)

See diagram above

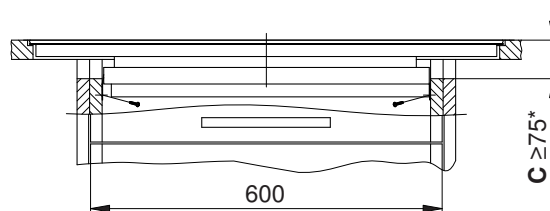


CookTop V6000 I905 (31114)

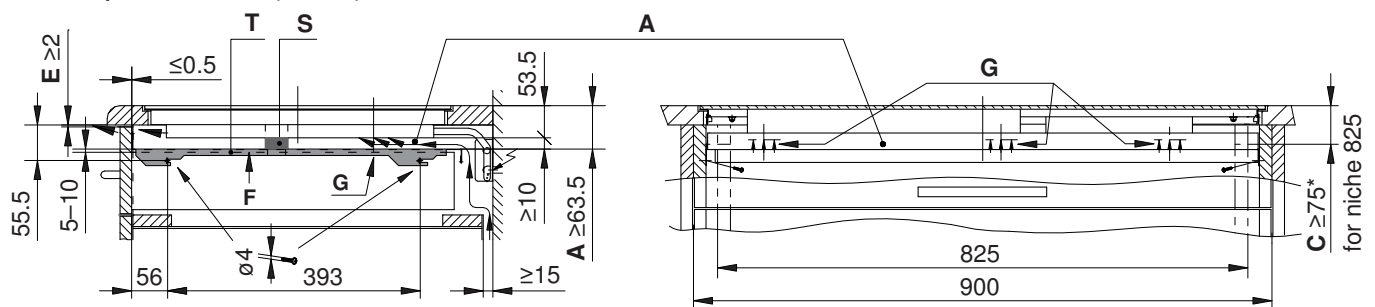


* Required for flush appliances

- A** Necessary space below the worktop for the ventilation of the appliance
- B** Cut-out in the side walls left/right is necessary for the ventilation of the appliance.
- C** Cut-out in the side walls for disassembly from below, only for flush version
- E** Air gap over entire width of cabinet element
- F** Drawer
- G** Fan
- S** Well-fitting seal over width of cabinet element
- T** Ventilation protective plate

CookTop V4000 I904 (31142)

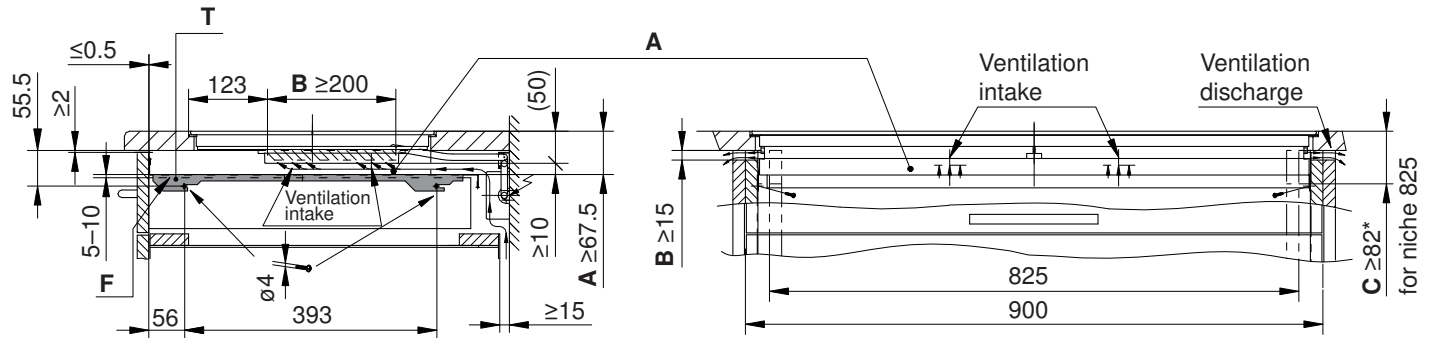

CookTop Teppan Yaki I40 (31140)

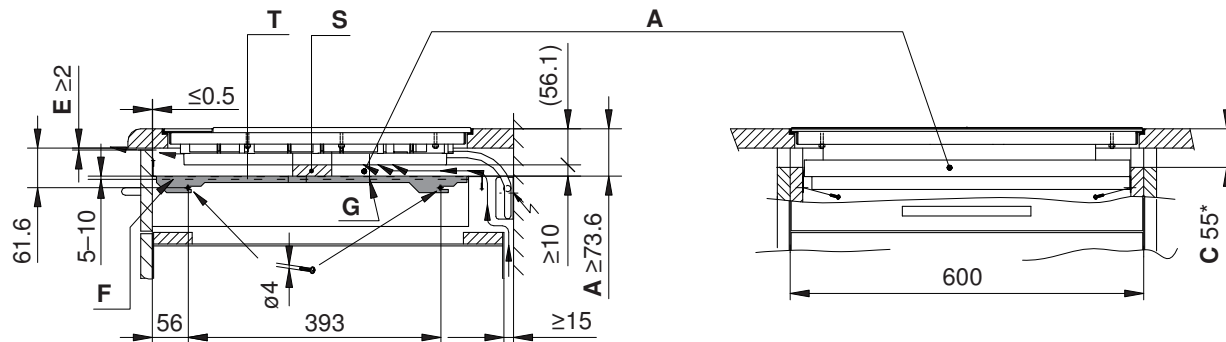

*


Required for flush appliances

- A** Necessary space below the worktop for the ventilation of the appliance
- B** Cut-out in the side walls left/right is necessary for the ventilation of the appliance.
- C** Cut-out in the side walls for disassembly from below, only for flush version
- E** Air gap over entire width of cabinet element
- F** Drawer
- G** Fan
- S** Well-fitting seal over width of cabinet element
- T** Ventilation protective plate

CookTop V6000 I906 FullFlex (31134)




The installation of a ventilation protection plate with seal is strongly recommended.

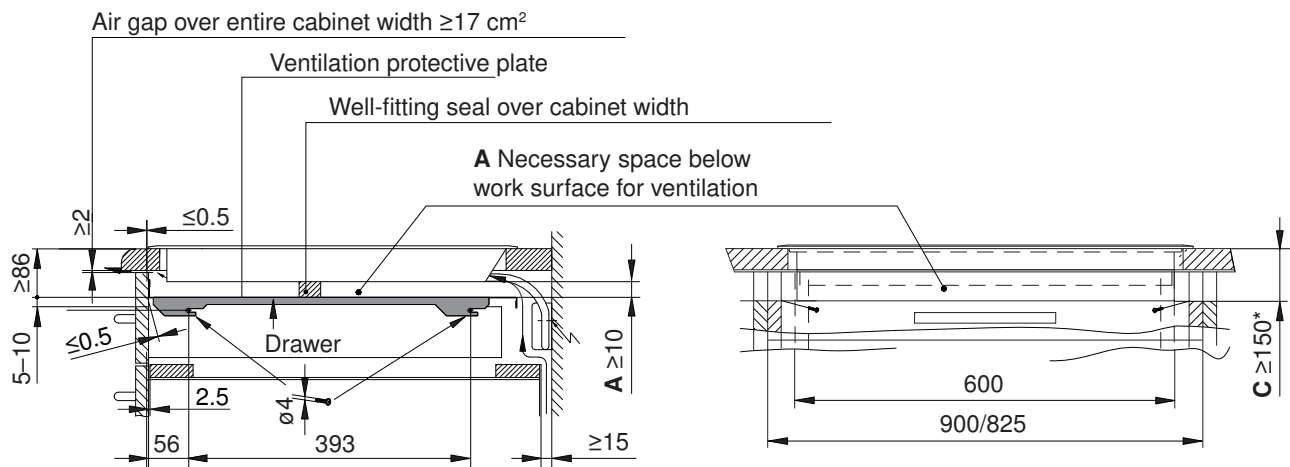

CookTop V6000 I705 FullFlex (31132)



The installation of a ventilation protection plate with seal is strongly recommended.

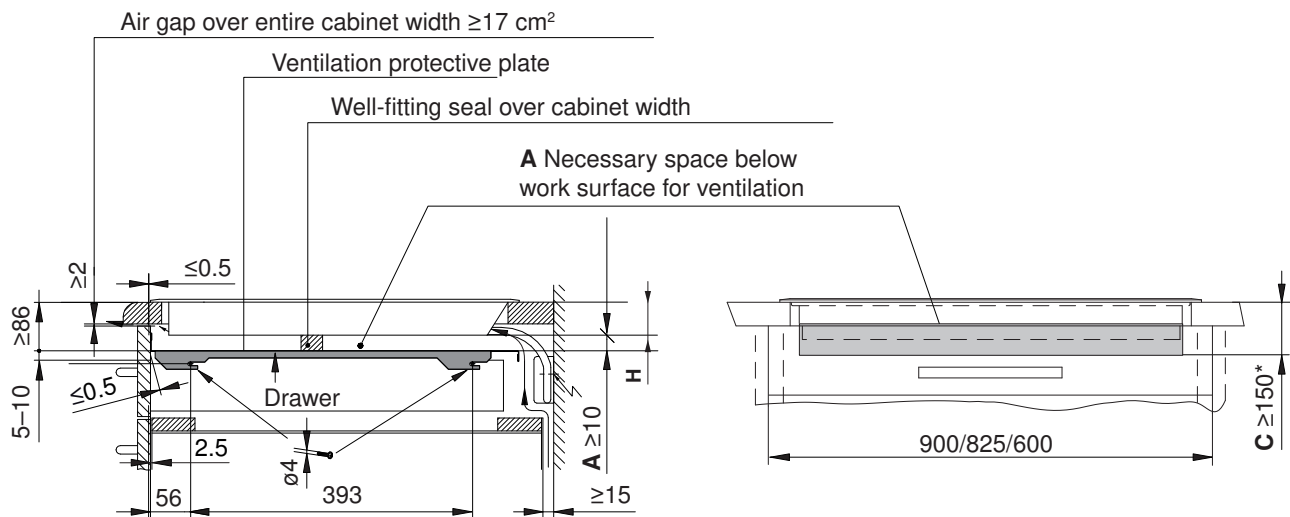

* Required for flush appliances


- A Necessary space below the worktop for the ventilation of the appliance
- B Cut-out in the side walls left/right is necessary for the ventilation of the appliance.
- C Cut-out in the side walls for disassembly from below, only for flush version
- E Air gap over entire width of cabinet element
- F Drawer
- G Fan
- S Well-fitting seal over width of cabinet element
- T Ventilation protective plate

8 Gas hobs



The distance from the appliance cut-out to the back wall must be ≥ 50 mm and to the side walls ≥ 200 mm. Parts such as side walls and reinforcing strips which protrude into the installation space under the cooking zone must be made of fire-resistant material.

The distance between the underside of the appliance tray and any part of the cabinet beneath that is made of combustible material must be ≥ 20 mm.

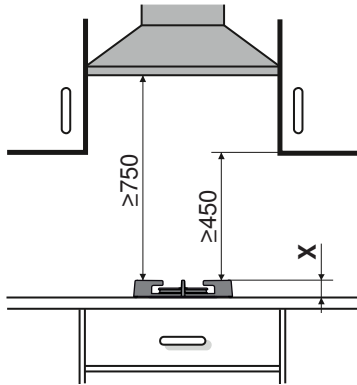

When a range hood is installed above the gas hob, the minimum distance given for the particular range hood must be observed.

Furthermore, the minimum distances illustrated must be strictly complied with even if a lower value is stated for the range hood.

A gas hob cannot be built in directly over another appliance due to the installation depth and the gas connection.

Model number	Type	X
31063	GAS411GSBZ	73.1
31072	GAS951GSBZ	
31075	GAS731GKBZ	
31064	GAS421GSBZ	46.7
31071	GAS641GSBZ	

8.1 Electrical connection data




General information on the electrical connections and an overview of the positions can be found in section Overview of connections, ranges and dimensions (see page 5).

Appliance	Mains connection	Fuse	Rated load	Mains cable
GAS411GSBZ, GAS421GSBZ, GAS641GSBZ, GAS731GKBZ, GAS951GSBZ	220–240 V~50–60 Hz	≥ 3 A	<20 W	1.7 m, with plug

8.2 Gas connection



The gas connection and the conversion to another gas type must be carried out by an authorized installer.

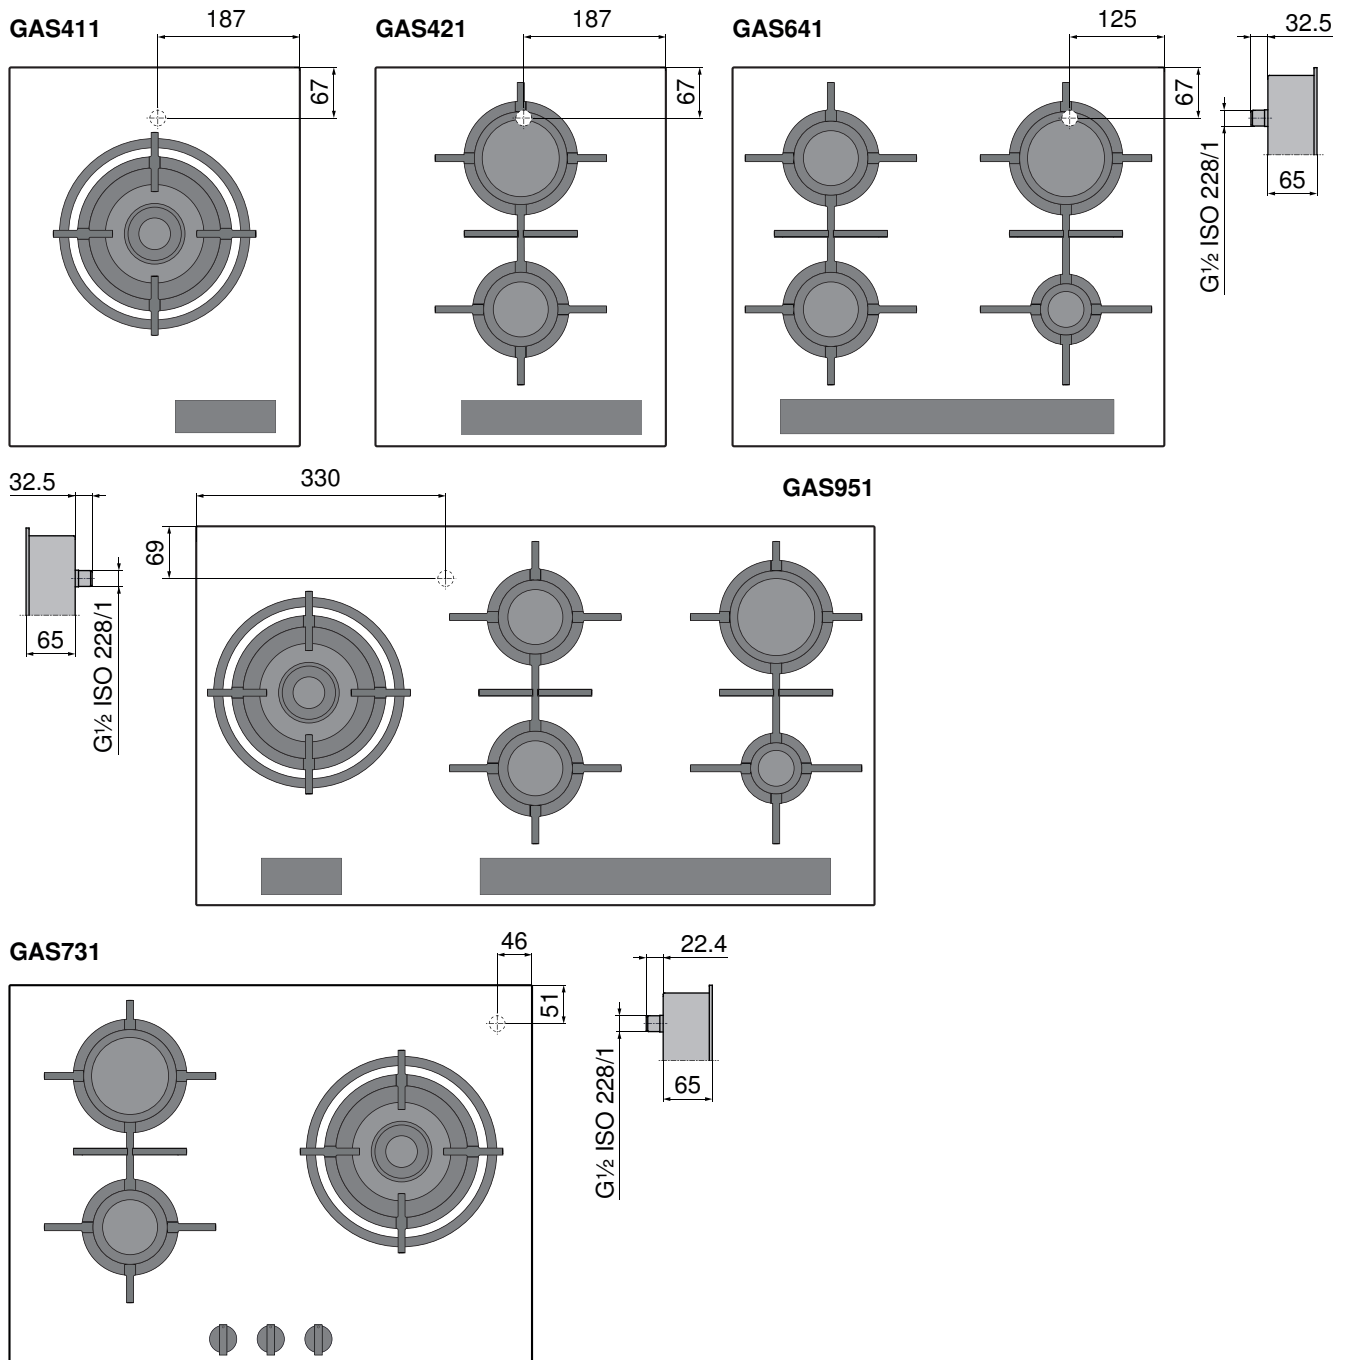

- The gas connection must be positioned so that the stop-cock and the supply connection point are accessible with the appliance installed.
- The gas connection must be positioned so that it does not get detrimentally hot during operation. In particular, the gas hose assemblies and the appliance's connection fittings must be clear of hot exhaust gases (e.g. from an oven).
- It must be ensured that the gas hose and the mains connection do not touch any hot parts of the appliance, otherwise the gas hose and the mains cable could become damaged through heat.
- A flexible connection lead (max. length 1.5 m) must be positioned so that it runs freely and does not come into contact with any movable parts of the kitchen cabinets (e.g. a drawer).

½-inch metric thread

The gas connection on the appliance has a ½-inch external thread in accordance with ISO 228/1. If the gas installation on site already has a corresponding counterpart, the gas appliance can be directly connected to it.

1/2-inch conical thread


If the gas connection has a conical thread, the transition piece and sealing ring must first be screwed onto the appliance. The transition piece has a conical external thread R 1/2-inch in accordance with ISO 7/11. In the case of a conical screw connection, the thread makes the seal, which is why the thread must be sealed with hemp or Teflon tape.



8.3 Ventilation

In order to guarantee minimum ventilation, a space of ≥20 mm height is necessary beneath the appliance.

- A** The rear panel of the base unit must be open around the work surface cut-out to guarantee continuous air circulation through the ventilation slits. The air must be drawn in from outside the cabinet and be able to circulate freely from inside the cabinet to the hob. The lower plinth must not be hermetically sealed. This can be achieved through a shadow gap at the plinth panel or the use of a ventilation grille.
- B** Alternatively, a concealed fresh air supply can ensure air circulation inside the cabinet. In order that enough cold air can be drawn in, there must be a continuous circulation of fresh air that extends outside the cabinet. The air must be drawn in from outside the cabinet and be able to circulate freely from inside the cabinet to the hob. The lower drawer panel should therefore not hermetically seal the cabinet.

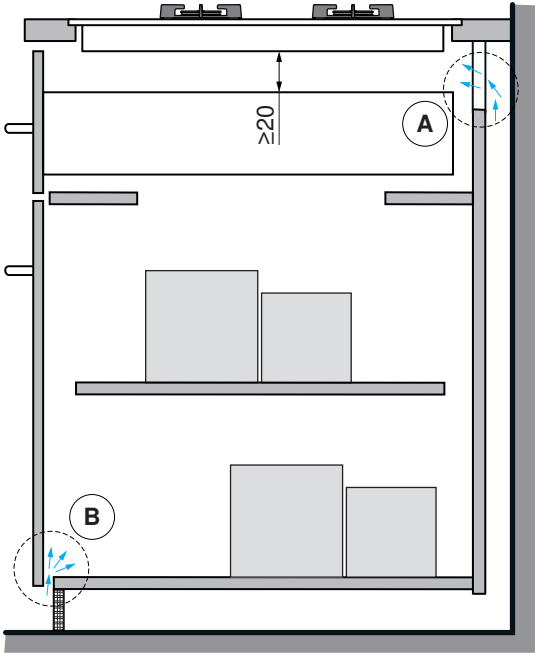

8.4 Setting up appliance to use local gas type


The appliance settings must match the local gas type and connection pressure. If the gas type and connection pressure have not been preset, the appliance has to be converted using the nozzle set supplied or other nozzle sets available as accessories. Information on the default gas setting as well as on the supplied and optional nozzle sets by country can be found in the catalogue. Conversion to another gas type is described in detail in the relevant installation instructions.

Overview of nozzle sets

Type	Default gas setting	Nozzle set (supplied)	Additional nozzle sets available for country-specific combinations of gas type and connection pressure
GAS411GSBZ	Natural gas AU (G20), 1.0 kPa	Universal liquid gas (G30/G31), 2.75 kPa	No other nozzle sets are permitted
GAS421GSBZ			
GAS641GSBZ			
GAS731GKBZ			
GAS951GSBZ			

* Validity with model no.

8.5 Surface-mounted installation with «DualDesign»

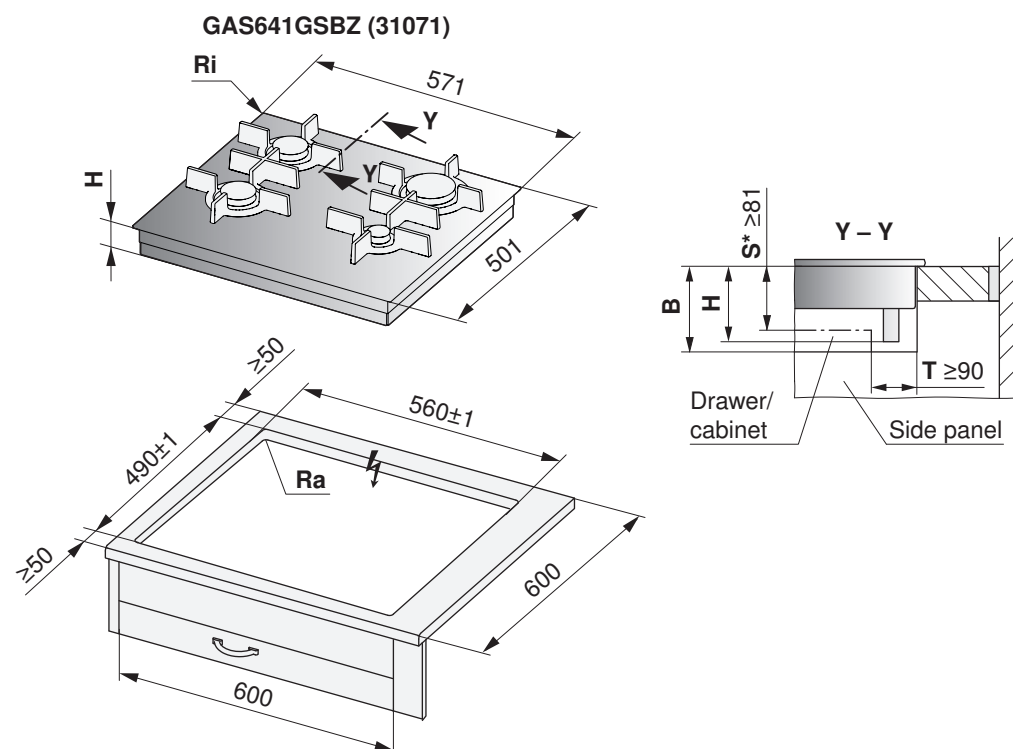


* The required clearance must be observed!

Type	B	H	Corner radius Ra/Ri
GAS641GSBZ	≥95 mm	94 mm	0–5/2 mm

- B** Required clearance for service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the gas connection
Ri Corner radii of appliance **Ra** Outer corner radii of cut-out
S Minimum distance between the top of the work surface and any drawer
T Minimum distance between the cut-out in the back and any drawer



Surface-mounted installation with «DualDesign»

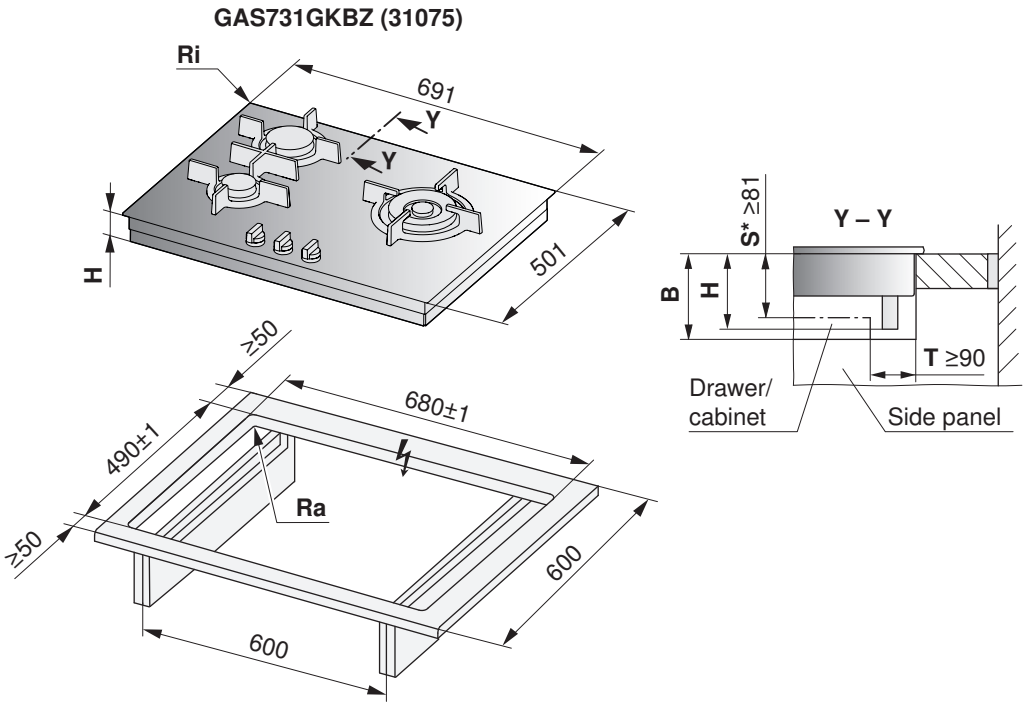


* The required clearance must be observed!

Type	B	H	Corner radius Ra/Ri
GAS731GKBZ	≥95 mm	84 mm	0–5/2 mm

- B** Required clearance for service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the gas connection
Ri Corner radii of appliance **Ra** Outer corner radii of cut-out
S Minimum distance between the top of the work surface and any drawer
T Minimum distance between the cut-out in the back and any drawer

Surface-mounted installation with «DualDesign»

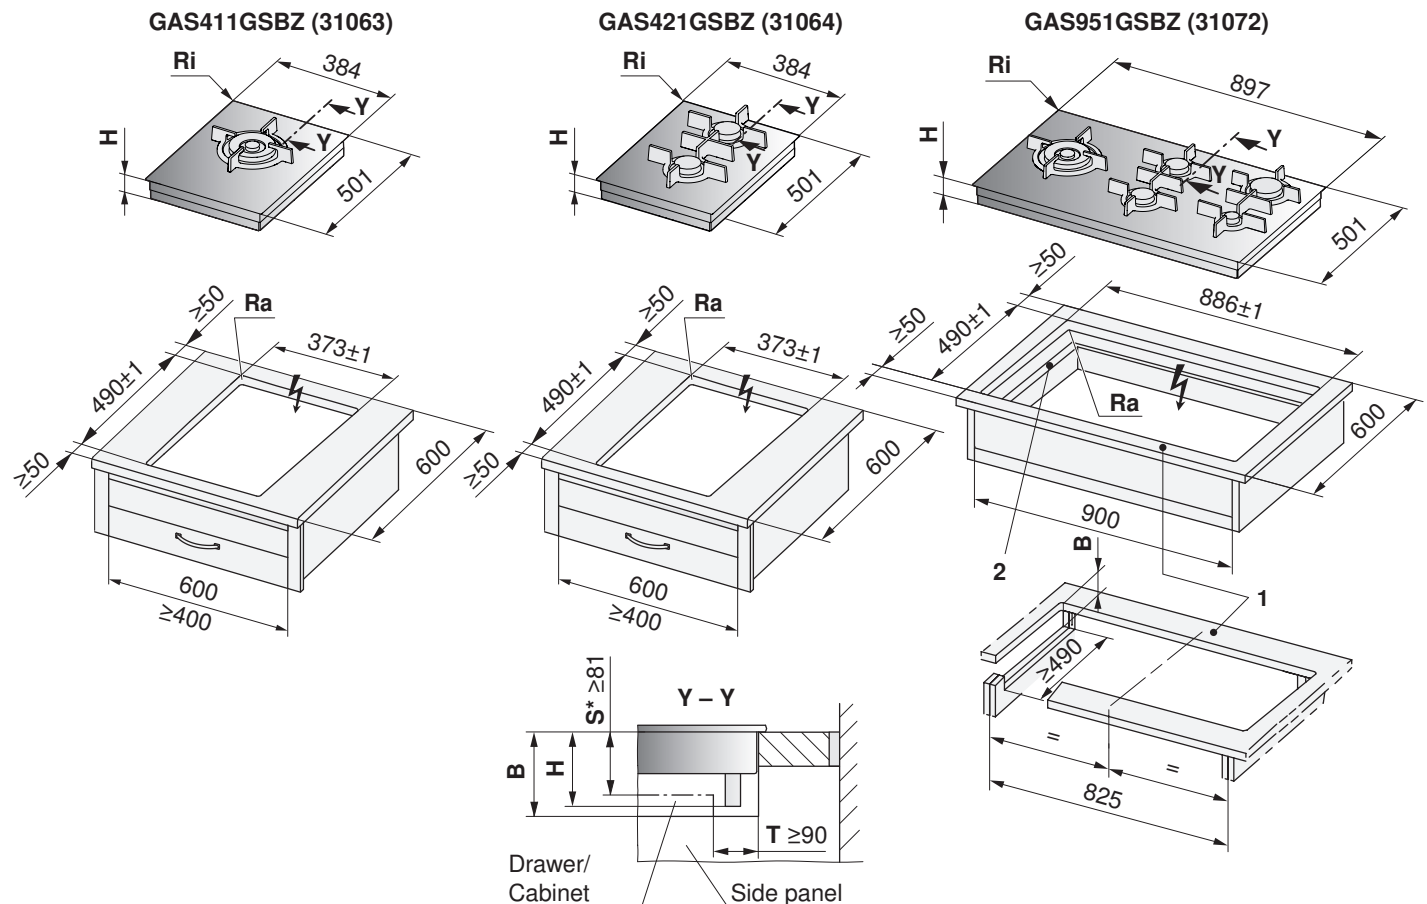

* The required clearance must be observed!


- 1 Front and rear struts may be reinforced on the underside. The strut width is determined by the producer of the stone worktop. The minimum strut width can vary according to the property of the stone.
- 2 For niche width 900 mm, cut-outs in side walls left/right are necessary for servicing work where the appliance base must be removed from below.

Type	B	H	Corner radius Ra/Ri
GAS411GSBZ, GAS421GSBZ, GAS951GSBZ	≥95 mm	94 mm	0–5/2 mm

- B** Required clearance for service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the gas connection
Ri Corner radii of appliance **Ra** Outer corner radii of cut-out
S Minimum distance between the top of the work surface and any drawer
T Minimum distance between the cut-out in the back and any drawer



8.6 Flush installation with «DualDesign»

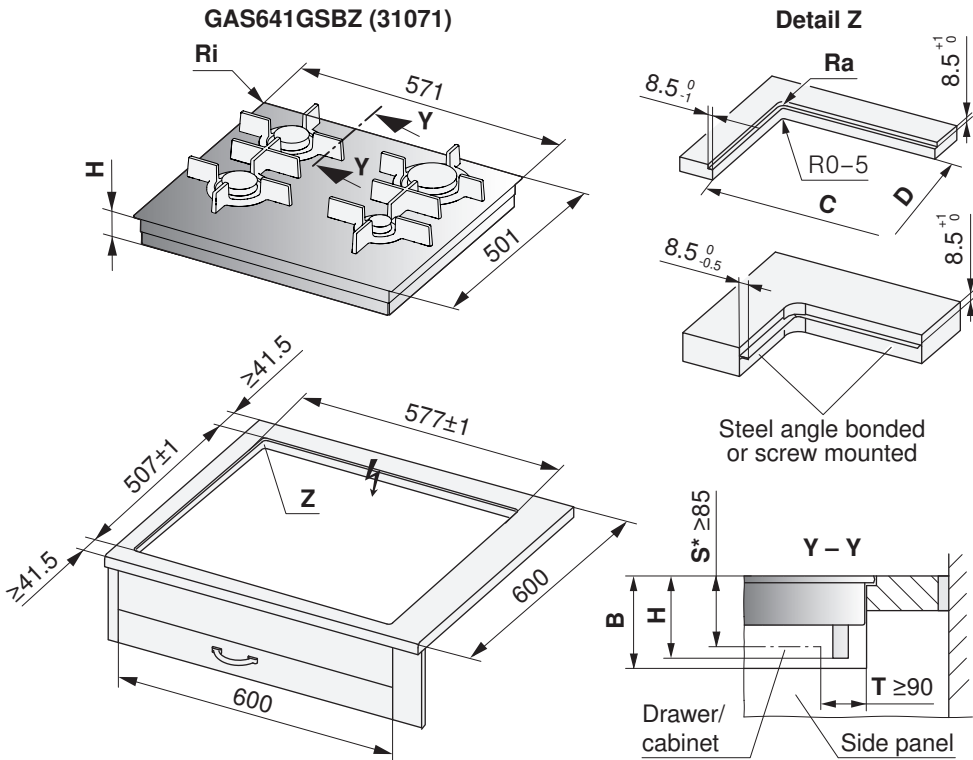


* The required clearance must be observed!

Type	B	H	Corner radius Ra/Ri	C/D
GAS641GSBZ	≥175 mm	98 mm	5/2 mm	560/490 mm

- B** Required clearance for service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the gas connection
Ri Corner radii of appliance
Ra Outer corner radii of cut-out
S Minimum distance between the top of the work surface and any drawer
T Minimum distance between the cut-out in the back and any drawer

Flush installation with «DualDesign»

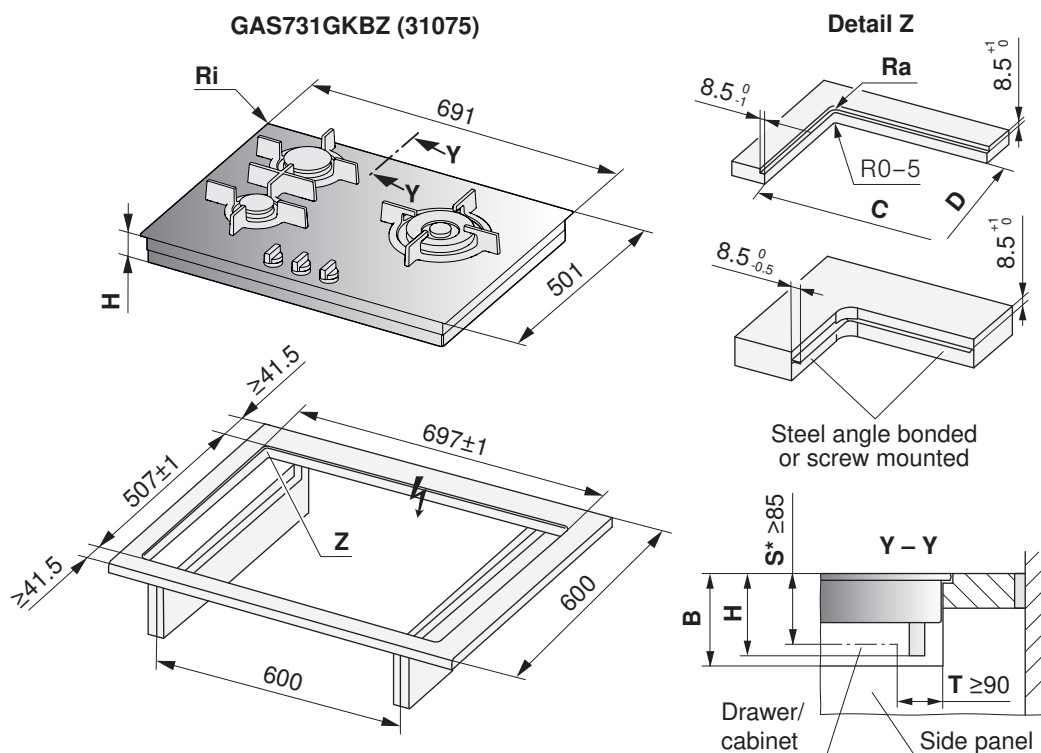


* The required clearance must be observed!

Type	B	H	Corner radius Ra/Ri	C/D
GAS731GKBZ	≥175 mm	88 mm	5/2 mm	680/490 mm

- B** Required clearance for service replacement over the entire cut-out area.
H Dimension from the top of the work surface to the underside of the gas connection
Ri Corner radii of appliance **Ra** Outer corner radii of cut-out
S Minimum distance between the top of the work surface and any drawer
T Minimum distance between the cut-out in the back and any drawer

Flush installation with «DualDesign»

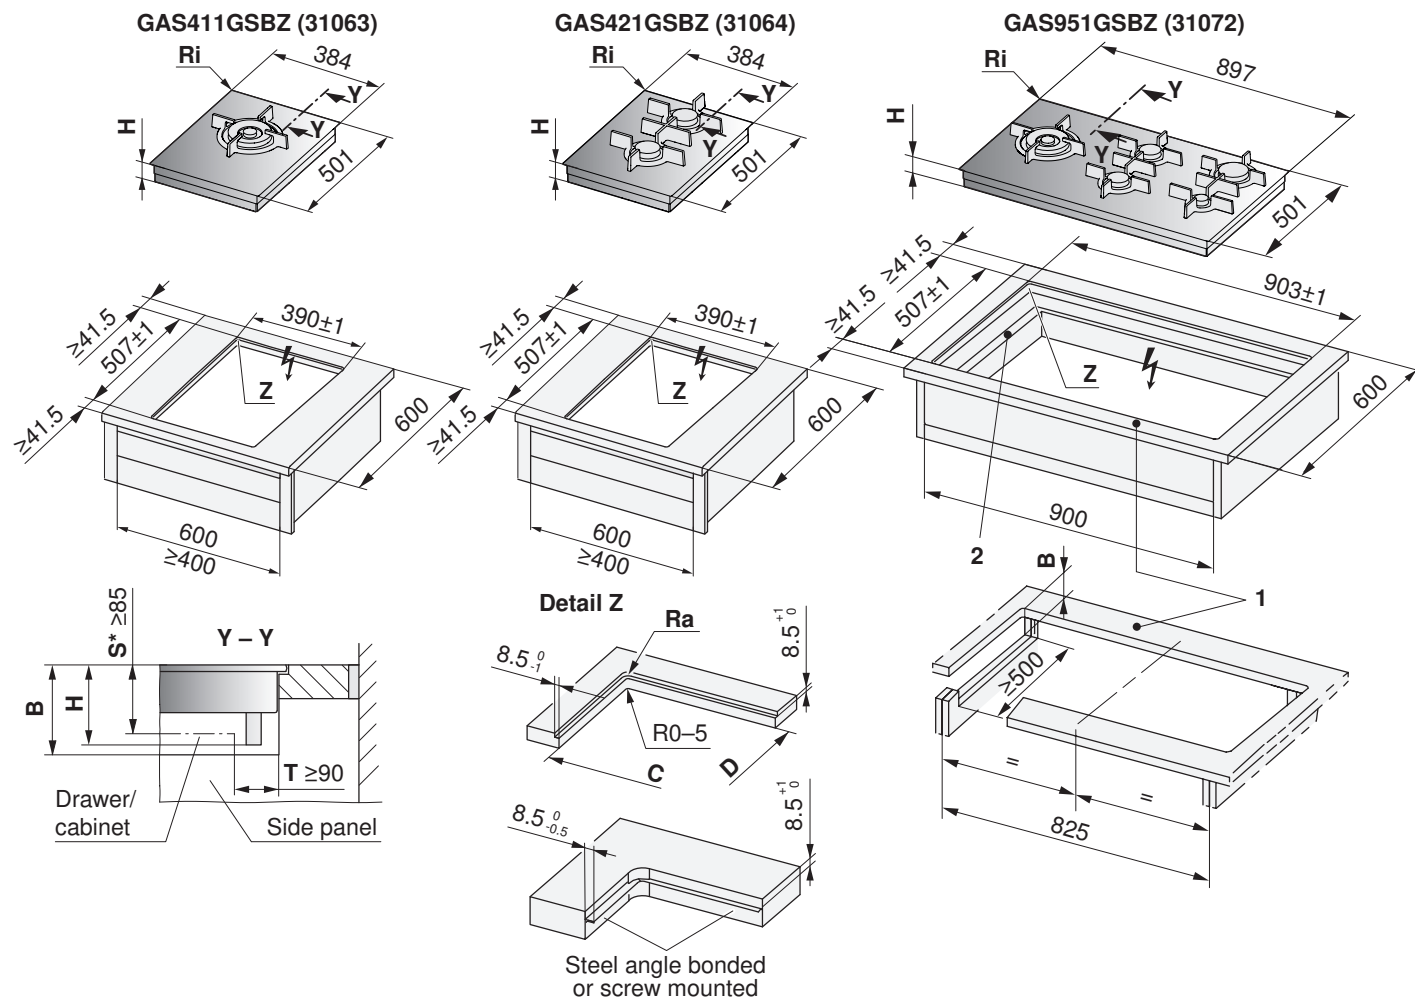

* The required clearance must be observed!

- 1 Front and rear struts may be reinforced on the underside. The strut width is determined by the producer of the stone worktop. The minimum strut width can vary according to the property of the stone.
- 2 For niche width 900 mm, cut-outs in side walls left/right are necessary for servicing work where the appliance base must be removed from below.

Type	B	H	Corner radius Ra/Ri	C/D
GAS411GSBZ, GAS421GSBZ	≥175 mm	98 mm	5/2 mm	373/490 mm
GAS951GSBZ				886/490 mm

- B** Required clearance for service replacement over the entire cut-out area.
- H** Dimension from the top of the work surface to the underside of the gas connection
- Ri** Corner radii of appliance **Ra** Outer corner radii of cut-out
- S** Minimum distance between the top of the work surface and any drawer
- T** Minimum distance between the cut-out in the back and any drawer

9 Combined hob installation


9.1 Surface-mounted combination

The surface-mounted hob combination is currently only possible for electric hobs (up to max. hob size 40), gas hobs and hob hoods. The intermediate support 1014361 (stainless steel) or 1019199 (black) is required for this.

Dimensions table for hobs

Combinations	Cut-out width C	Intermediate support position G1	Intermediate support position G2
30+30 cm	554 mm	277 mm	-
30+40 cm	657 mm	277 mm	-
40+40 cm	760 mm	380 mm	-
30+30+30 cm	838 mm	277 mm	561 mm
30+60 cm	844 mm	277 mm	-
40+60 cm	947 mm	380 mm	-
30+70 cm	964 mm	277 mm	-
30+40+40 cm	1044 mm	277 mm	664 mm
40+70 cm	1067 mm	380 mm	-
40+40+40 cm	1147 mm	380 mm	767 mm
30+90 cm	1170 mm	277 mm	-
30+40+60 cm	1231 mm	277 mm	664 mm
40+90 cm	1273 mm	380 mm	-
40+40+60 cm	1334 mm	380 mm	767 mm


D 490 mm
I ≥50 mm
J ≥50 mm
Ra 0–5 mm

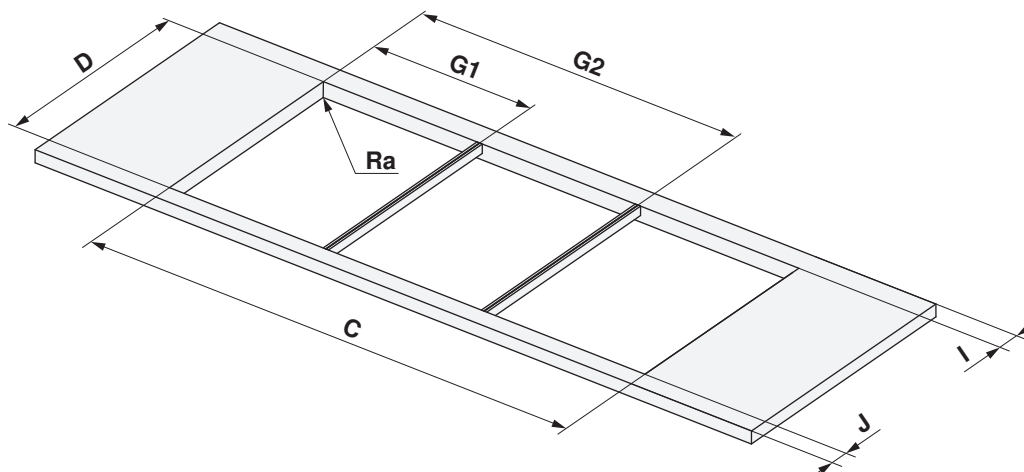

9.2
 Examples of surface-mounted combinations


		
Worktop	Hobs	Intermediate support

Double surface-mounted combination

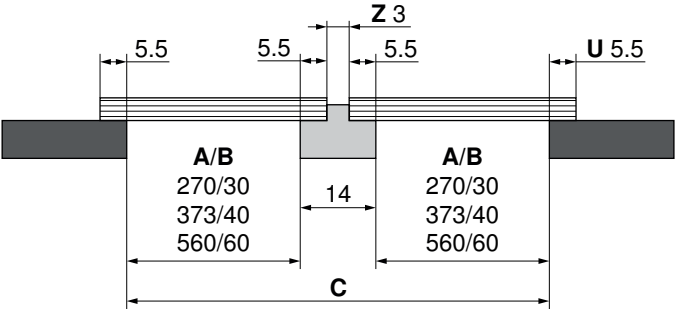

Example for cut-out width **C** with 30+30 cm: 270+14+270 = 554 mm

Triple surface-mounted combination

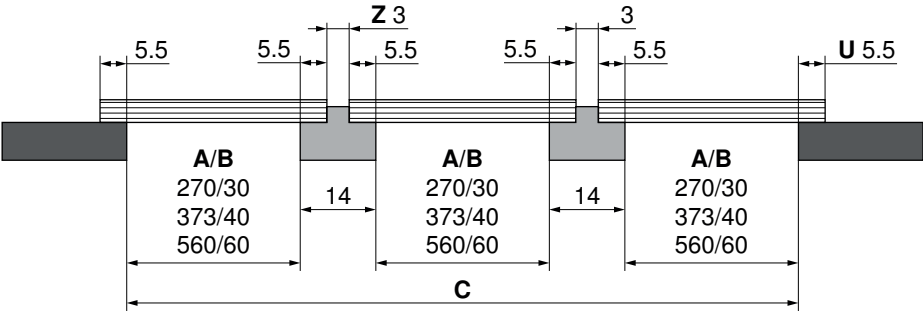

Example for cut-out width **C** with 30+30+30 cm: 270+14+270+14+270 = 838 mm



A	B	C	U	Z
Cut-out in mm	Hob size in cm	Cut-out width	Hob/worktop overlap	Intermediate support

9.3 Flush combination



The flush-mounted hob combination is currently possible for all gas hobs, hob hoods and flush-mounted electric hobs with a base plate depth of 501 mm. The intermediate support kit H63789 (contains two intermediate supports) is required.

Dimensions table for hobs

Combinations	Cut-out width E	Cut-out width C	Intermediate support position G1	Intermediate support position G2
30+30 cm	571 mm	554 mm	285.5 mm	-
30+40 cm	674 mm	657 mm	285.5 mm	-
40+40 cm	777 mm	760 mm	388.5 mm	-
30+30+30 cm	855 mm	838 mm	285.5 mm	569.5 mm
30+60 cm	861 mm	844 mm	285.5 mm	-
40+60 cm	964 mm	947 mm	388.5 mm	-
30+70 cm	981 mm	964 mm	285.5 mm	-
30+40+40 cm	1061 mm	1044 mm	285.5 mm	672.5 mm
40+70 cm	1084 mm	1067 mm	388.5 mm	-
40+40+40 cm	1164 mm	1147 mm	388.5 mm	775.5 mm
30+90 cm	1187 mm	1170 mm	285.5 mm	-
30+40+60 cm	1248 mm	1231 mm	285.5 mm	672.5 mm
40+90 cm	1290 mm	1273 mm	388.5 mm	-
40+40+60 cm	1351 mm	1334 mm	385.5 mm	775.5 mm

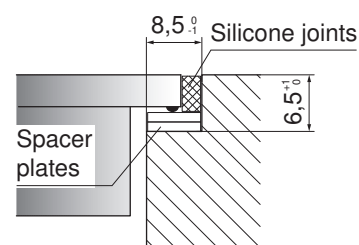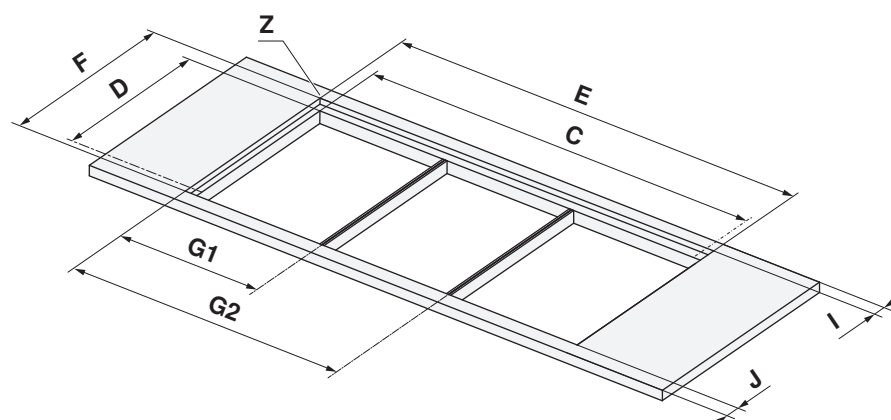

Detail Z




Steel angle mounted with adhesive or screws

- I ≥ 41.5 mm
- J ≥ 41.5 mm
- D 490 ± 1 mm
- F 507 ± 1 mm
- Ra 5 mm

9.4 Examples of flush combinations

			
Worktop	Hobs	Intermediate support	Silicone joint


Double flush combination

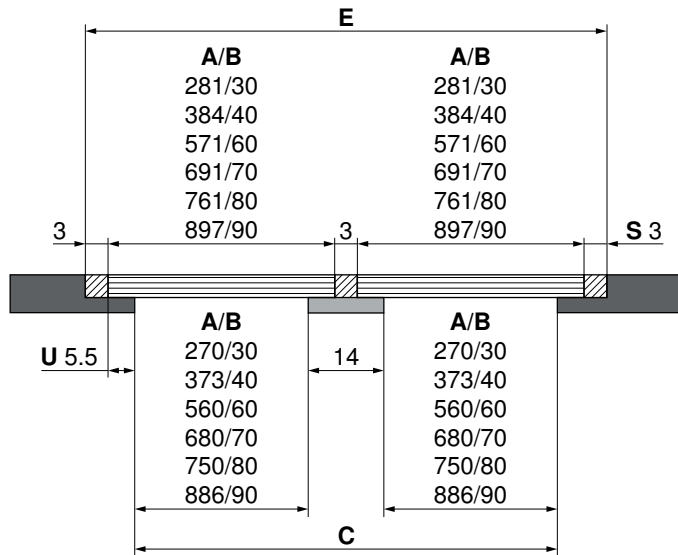

Example for cut-out width **E** with 30+30 cm: $3+281+3+281+3 = 571$ mm

Example for cut-out width **C** with 30+30 cm: $270+14+270 = 554$ mm

Triple flush combination

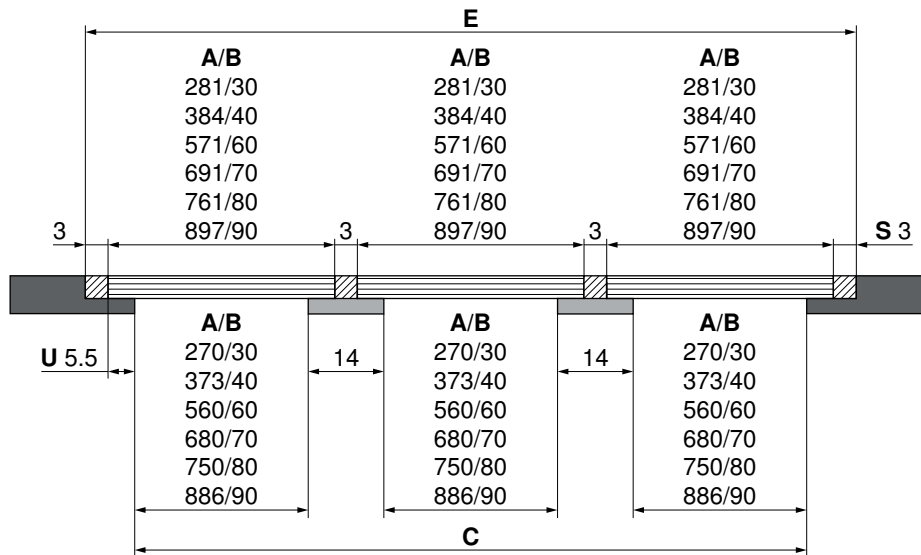

Example for cut-out width **E** with 30+30+30 cm: $3+281+3+281+3+281+3 = 855$ mm

Example for cut-out width **C** with 30+30+30 cm: $270+14+270+14+270 = 838$ mm

A	B	C/E	S	U
Cut-out in mm	Hob size in cm	Cut-out width	Silicone joint	Hob/worktop overlap

10 CombiCookTop induction hob with hood

10.1 Electrical connection data




General information on the electrical connections and an overview of the positions can be found in section Overview of connections, ranges and dimensions (see page 5).

Type	Mains connection	Fuse	Rated load	Mains cable
CombiCookTop V2000 I804 (31095) CombiCookTop V4000 I804 (31096)	220–240 V~ 50–60 Hz	32 A	7400 W	1.7 m, without plug


10.2 Dimensions



All plastering, plasterboarding, wall papering and painting work is to be carried out prior to installing the appliance. Ensure that the material is sufficiently stable. For the recirculation mode, ensure sufficient ventilation so that moisture can escape. Plan in suitable material/wood.

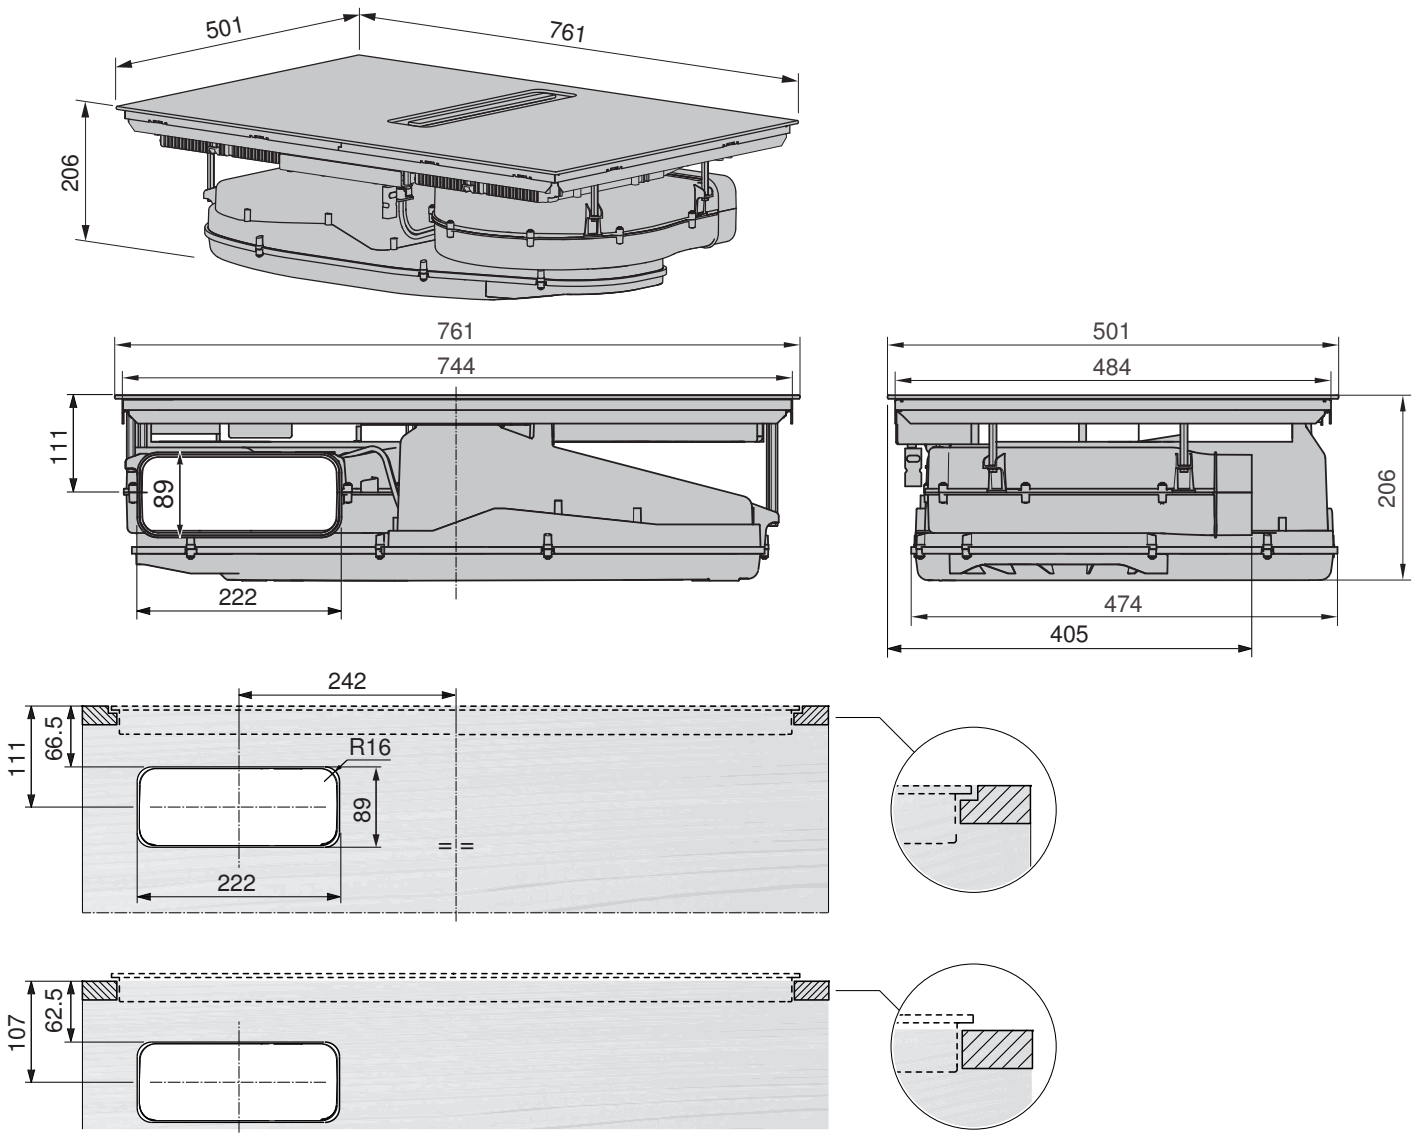

10.3 Scope of delivery

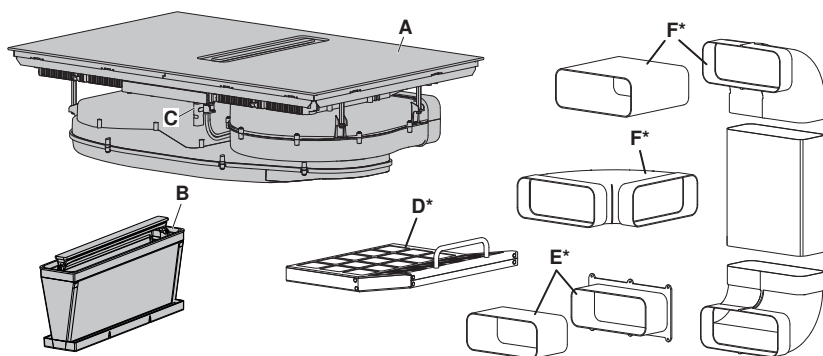

- A** Hob
B Filter cassette with grease filter
C Potential-free switch contact (window contact switch)

Not included in the scope of delivery, but available for order as accessories:


- D*** Activated charcoal filter (recirculation operation only)
E* Telescopic connection for recirculation operation, unguided
F* Flat channels, elbow variants and transition pieces

10.4 Ventilation of the hob


For installation of hobs with integrated range hood, the following minimum requirements apply:

- The hot air exhaust should be provided by a ventilation slit of $\geq 2 \text{ mm}$ at the front.
- Not only exhaust air but also replacement air in the cabinet should be taken into account. There are different ways to do this, including :
 - The rear panel of the base unit must be open around the work surface cut-out to guarantee continuous air circulation through the ventilation slits. The air must be drawn in from outside the cabinet and be able to circulate freely from inside the cabinet to the hob. The lower plinth must not be hermetically sealed. This can be achieved through a shadow gap at the plinth panel or through the use of a ventilation grille.
 - Alternatively, a concealed fresh air supply can ensure air circulation inside the cabinet. In order that enough cold air can be drawn in, there must be a continuous circulation of fresh air that extends outside the cabinet. The lower drawer panel should therefore not hermetically seal the cabinet.

Extraction or recirculation operation with flat channel system

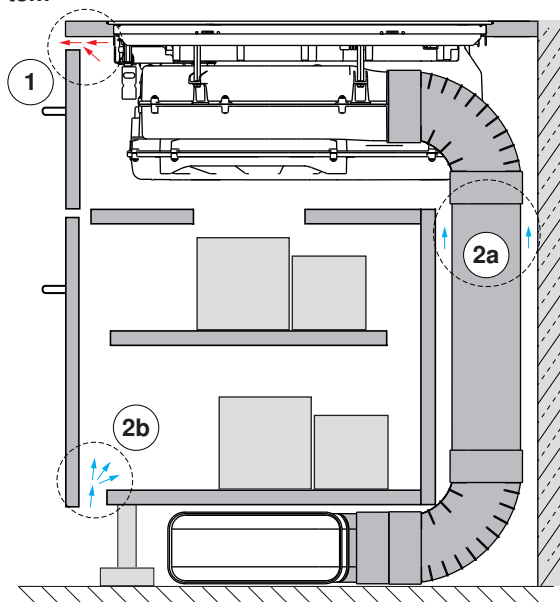

Recirculation operation without flat channel system

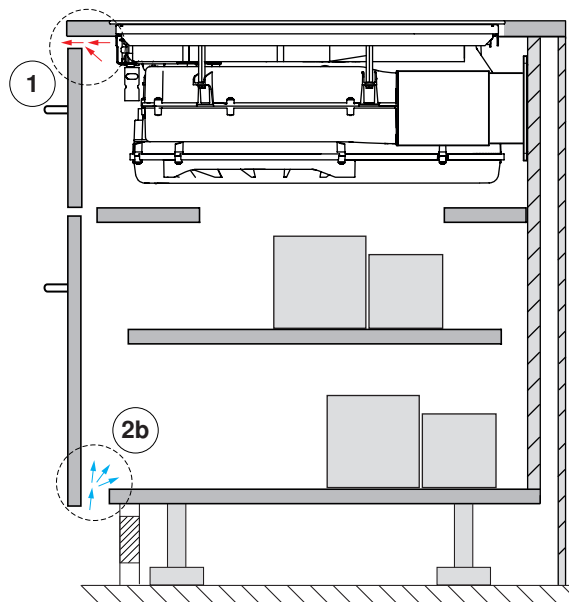


For recirculation operation without flat channel system, the exhaust air from the range hood and the ventilation (supply air for hob) must not mix in this installation variant. These areas must be kept separate (see supply air option 2b above)!

Inadequate ventilation will affect the performance of the appliance. Ventilation slit should extend across the entire width where possible.

10.5 Surface-mounted installation

The layout of the hob to be fitted may differ from the hob illustrated!

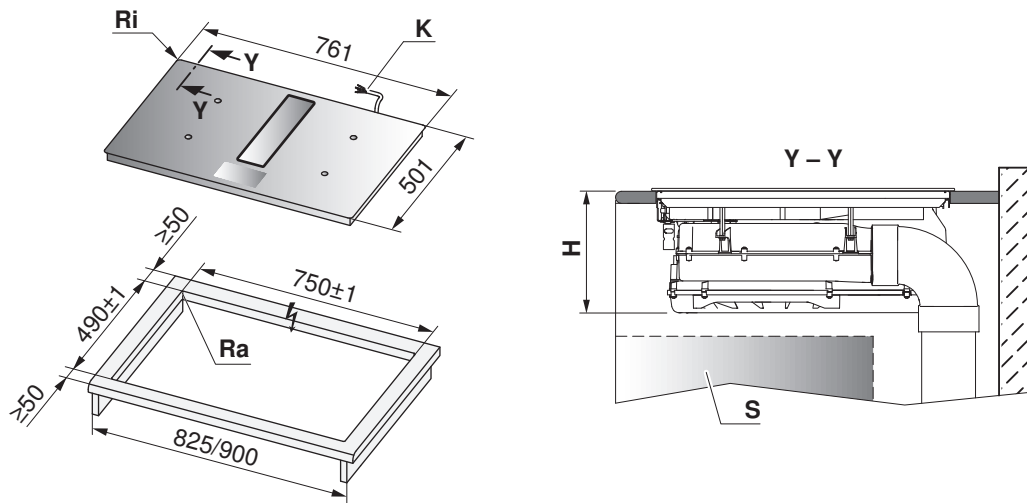

Model designation	H	Corner radius Ra/Ri
CombiCookTop V2000/V4000 I804	202 mm	5/2.0 mm

- H** Dimension from the top of the work surface to the underside of the hob
S Drawer
K Cable length 170 cm
Ri Corner radii of appliance
Ra Outer corner radii of cut-out



Ensure access from below for service and maintenance work across the entire width of the cabinet. Where an intermediate base is to be provided between the drawer and the appliance, it must be removable from below.

Installation


- Create an accurate installation cut-out.
- Carefully put the appliance in the installation cut-out and press against the worktop with sufficient overlap.



Access to the appliance from below via the entire cut-out area must be guaranteed. For servicing purposes, the induction generator can be removed from below with the mounting plate. It must be possible to unscrew the contact-proof covers from below.

10.6 Flush installation

The layout of the hob to be fitted may differ from the hob illustrated!

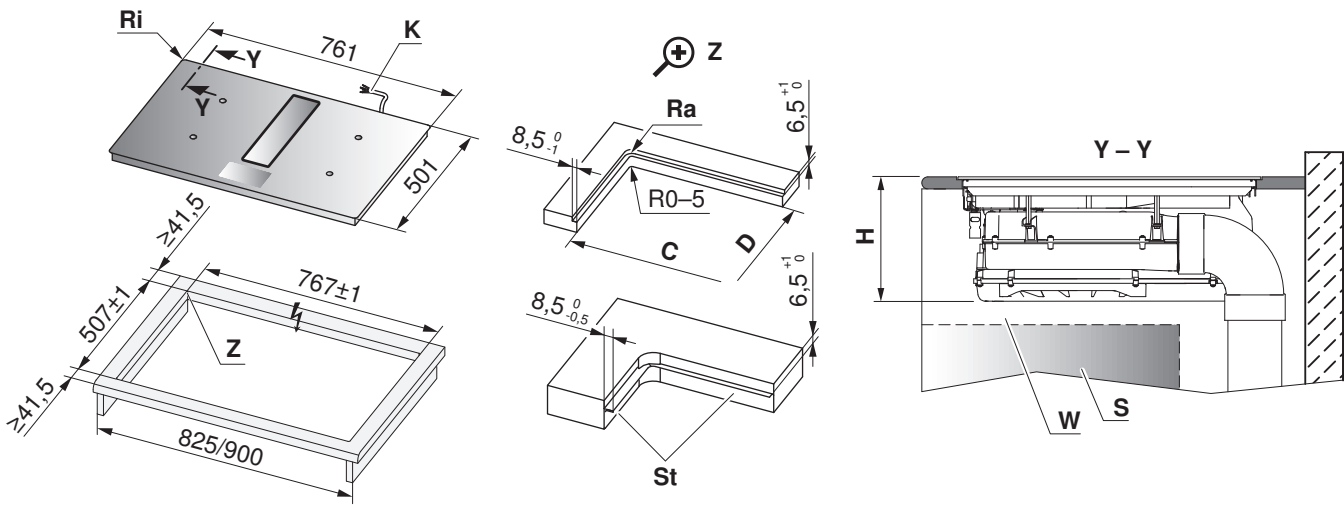

Model designation	C/D	H	Corner radius Ra/Ri
CombiCookTop V2000/V4000 I804	750/490	206 mm	5/2.0 mm

- H** Dimension from the top of the work surface to the underside of the hob
St Steel angle bonded or screw mounted
S Drawer
W Side panel
K Cable length 170 cm
Ri Corner radii of appliance
Ra Outer corner radii of cut-out

 **Ensure access from below for service and maintenance work across the entire width of the cabinet. Where an intermediate base is to be provided between the drawer and the appliance, it must be removable from below.**

Installation


- Create an accurate installation cut-out.
- The mounting surface can be reamed out or created by installing wood/stone supports or using the steel angle set (see Accessories).
-  **Access to the appliance from below via the entire cut-out area must be guaranteed. For servicing purposes, the induction generator can be removed from below with the mounting plate. It must be possible to unscrew the contact-proof covers from below.**
- Prepare the cut-out and appliance in accordance with the specifications in the enclosed cementing-in instructions.
► Carefully cement the appliance in and leave the silicone sealant to dry for at least 24 hours.
► Connect to the electrical mains connection before inserting the appliance, if necessary.

10.7 Installation overview base unit




Observe local regulations on pipework RF1 (metal) and RF3 (plastic)!


Recirculation operation, unguided, with telescopic connection (E*)

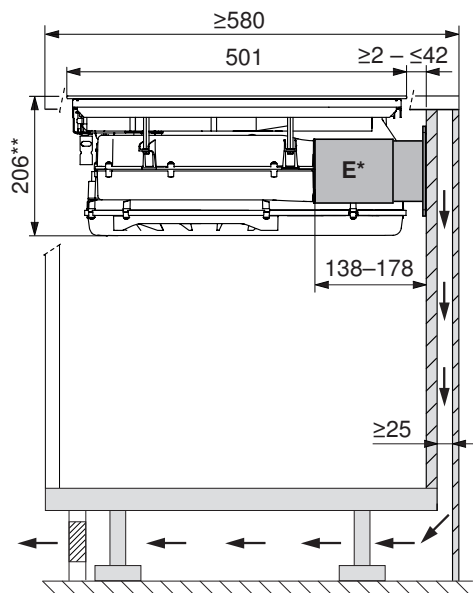


Recirculation operation, unguided, long

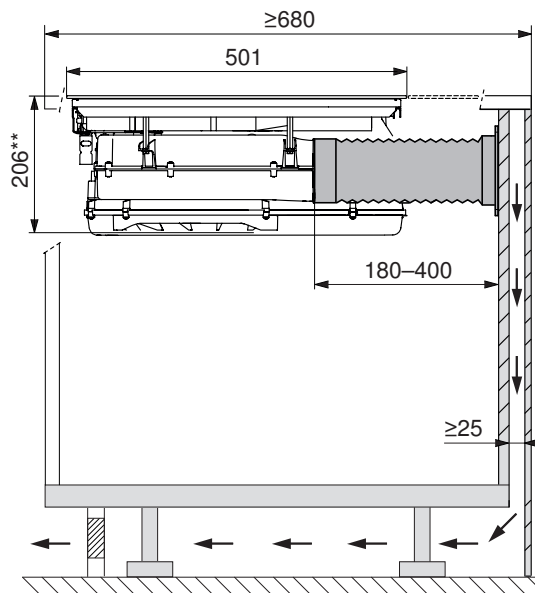

Extraction or recirculation operation with flat channel system, plastic

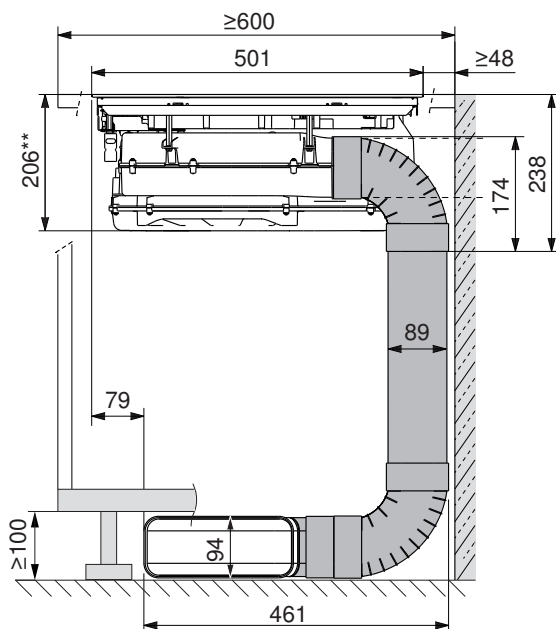


Extraction operation with flat channel system, metal

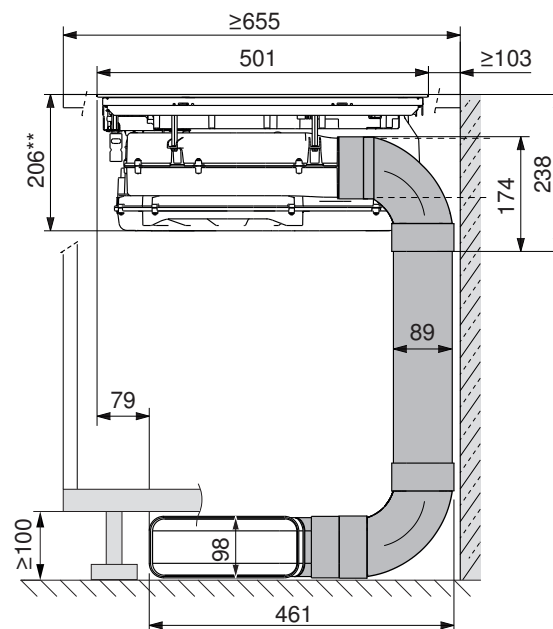

** = Flush installation (surface-mounted installation: 202 mm)

Extraction or recirculation operation with flat channel system, extra deep

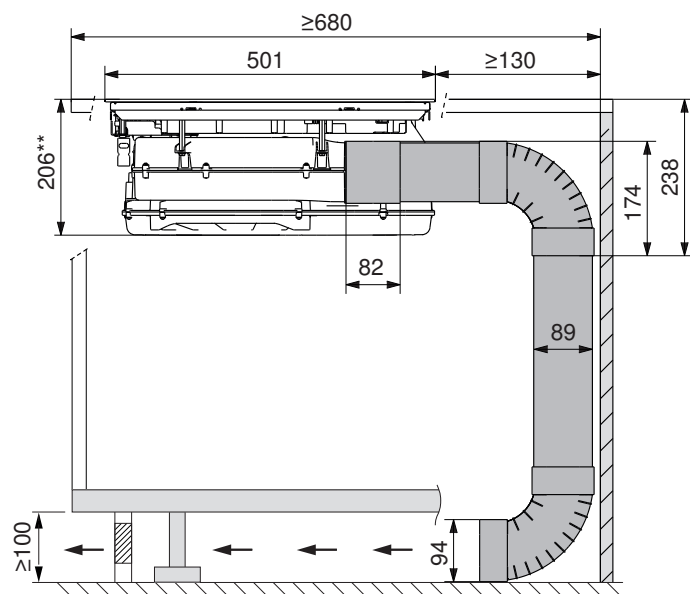

** = Flush installation (surface-mounted installation: 202 mm)

Information on total exhaust air length possible (see page 69).




Flat channels, elbow variants and transition pieces are not included in the scope of delivery, but are available for order as accessories. The individual components required must be taken into account during planning.


10.8 Flat channel systems made of plastic (RF3)



Plastic accessories are not made of non-flammable material.

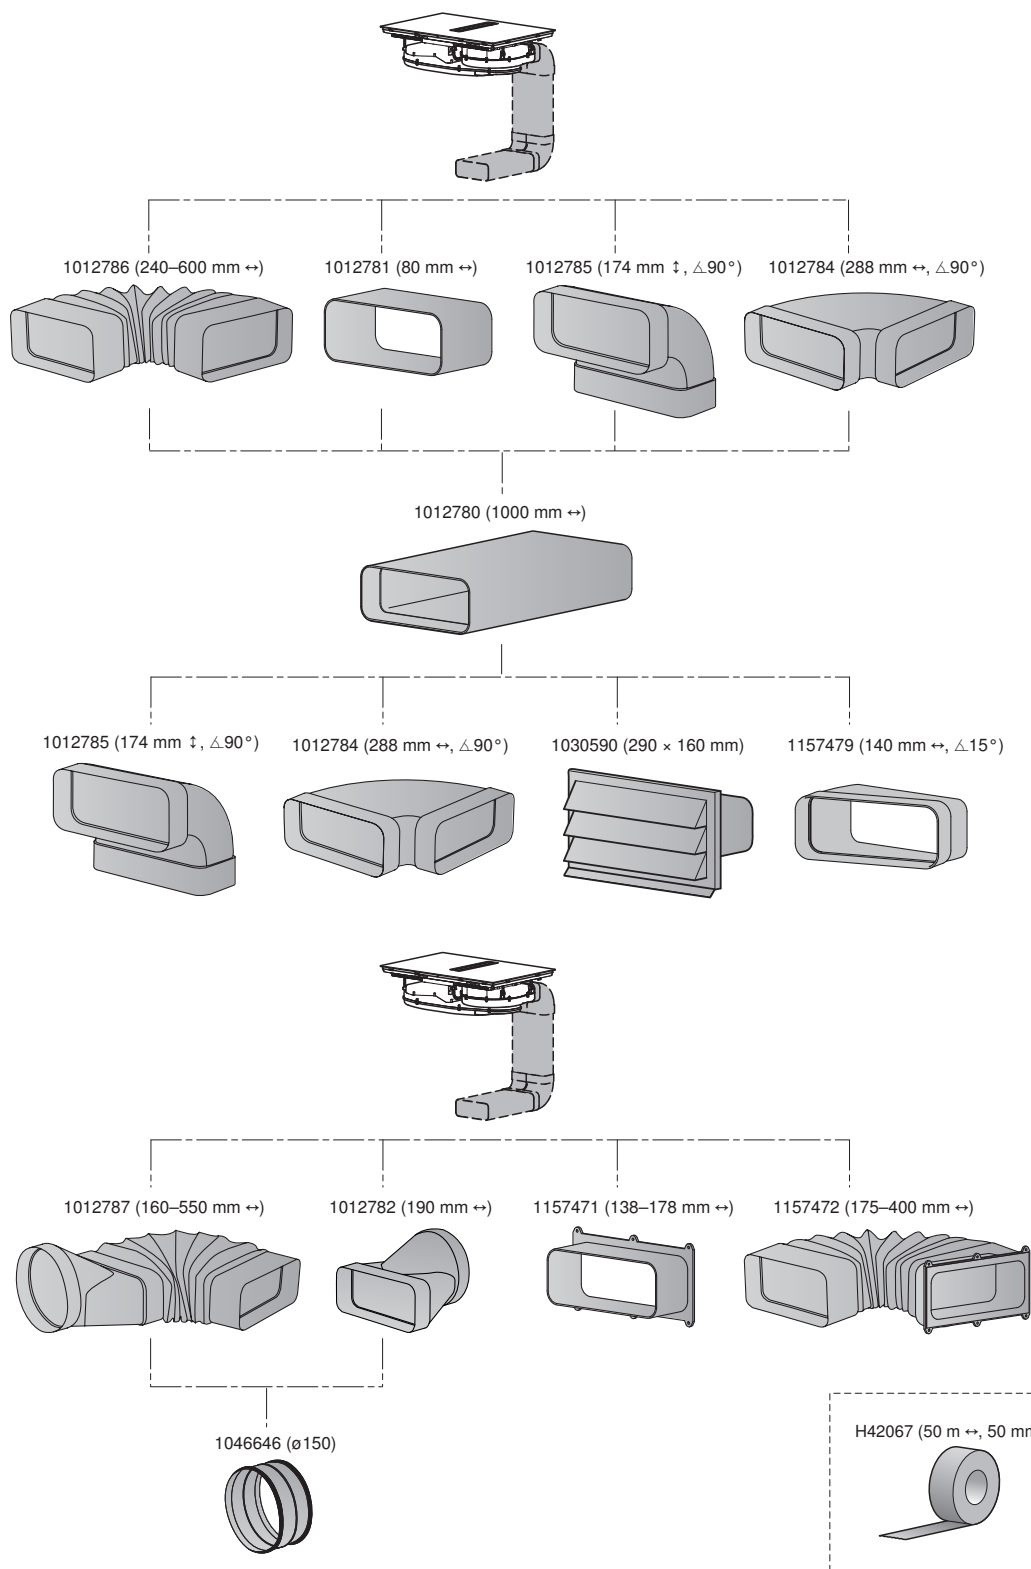

10.9 Flat channel systems made of metal (RF1)

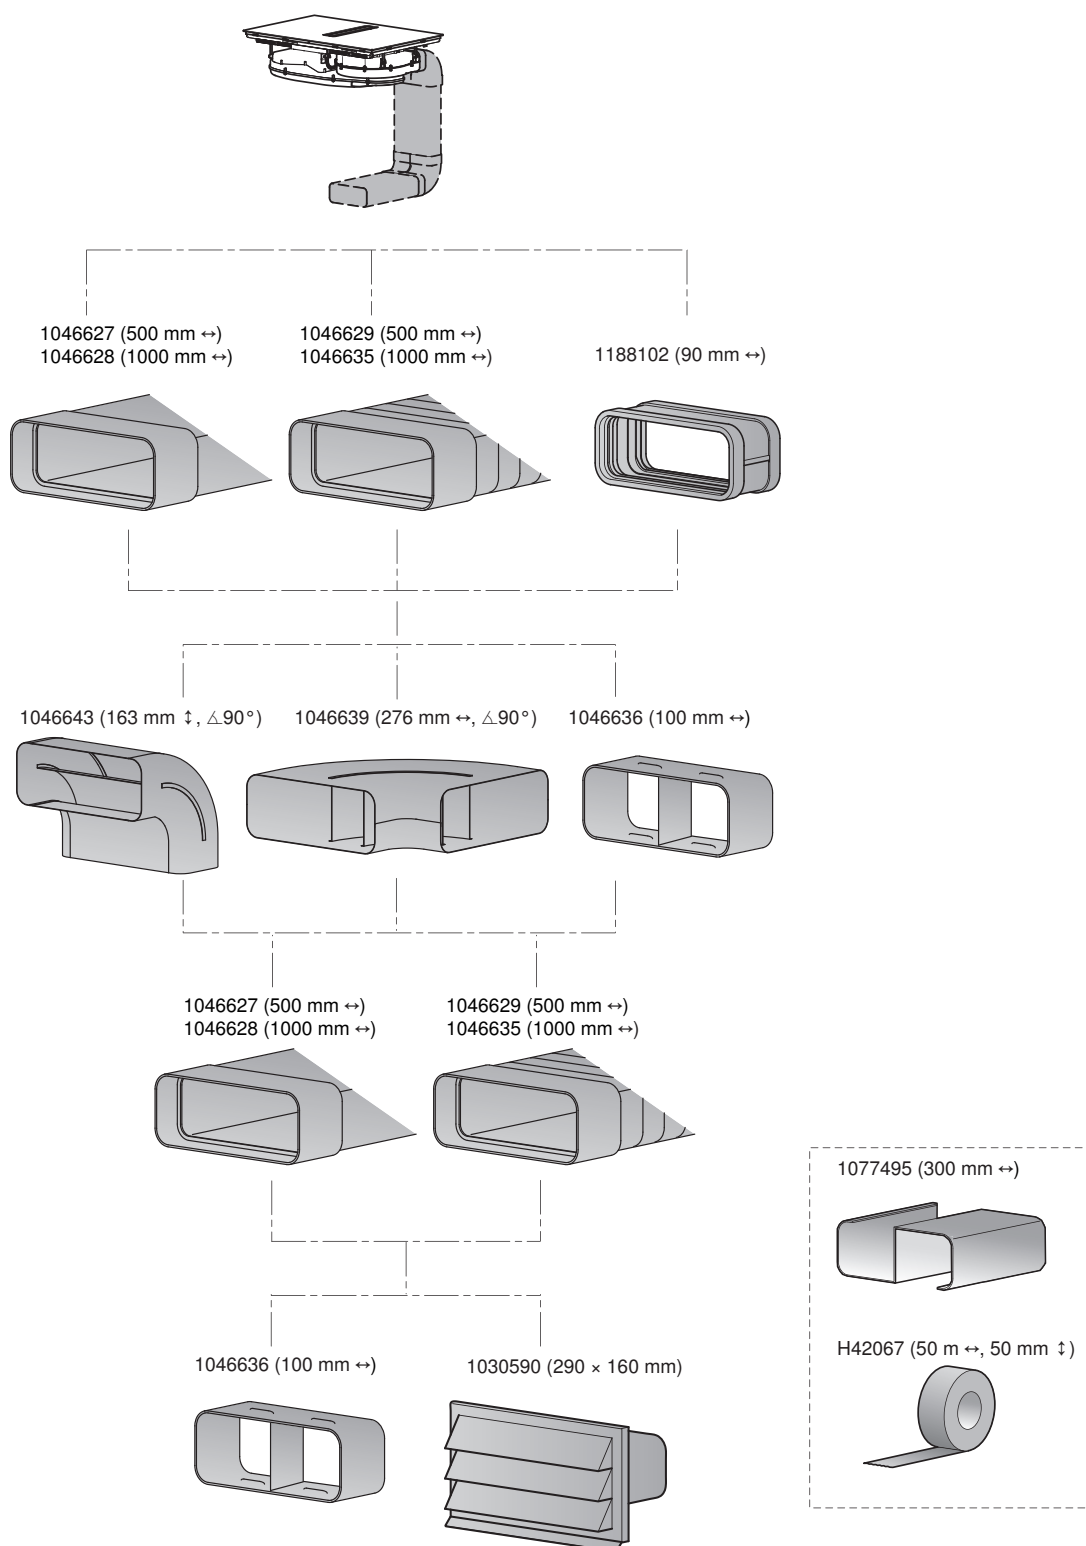

The duct spacers 1077495 prevent the narrowing or compression of the air duct. Hence the use of duct spacers is necessary if accessory 1046627/1046628 is embedded in concrete.

10.10 Recirculation mode



An air outlet of $\geq 500 \text{ cm}^2$ at the exhaust duct of the range hood is recommended. During operation, the air outlet from the exhaust duct of the range hood must not be obstructed. This can be achieved through a shadow gap at the plinth panel or the use of a ventilation grille.




Dedicated accessories that need to be fitted to operate the appliance in the recirculation mode: 1155757 long-life-Plus activated charcoal filter!

10.11 Extraction mode




There is a danger of toxic fumes developing if the range hood is operated at the same time as an ambient air-dependent firing system!


- If possible, only use pipes with a smooth inner surface for exhaust ductwork.
- Length of flat channel system to air outlet: 6 m channel section with six 90° elbows, 8 m with four 90° elbows or 10 m with two 90° elbows are realizable. If the exhaust duct is to be routed outdoors, we recommend installing a suitable wall box (accessory available for order).
- To achieve the greatest possible air extraction with the lowest noise levels, please observe the following:
 - Use 222 × 89 mm flat channel or pipe with $\geq \varnothing 150 \text{ mm}$ (accessory available for order)
 - The exhaust ducting should be as short and straight as possible and must not be kinked or compressed.
 - Only use connection elbows with large radii.
 - Ensure all pipe connections are secure and airtight.

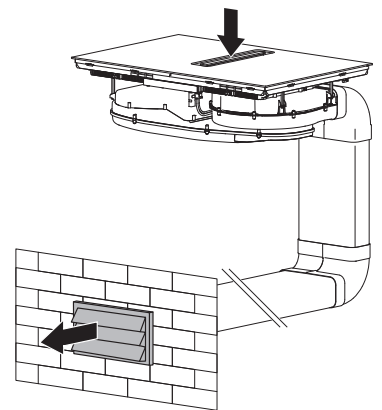


Lateral exhaust air outlet via plinth

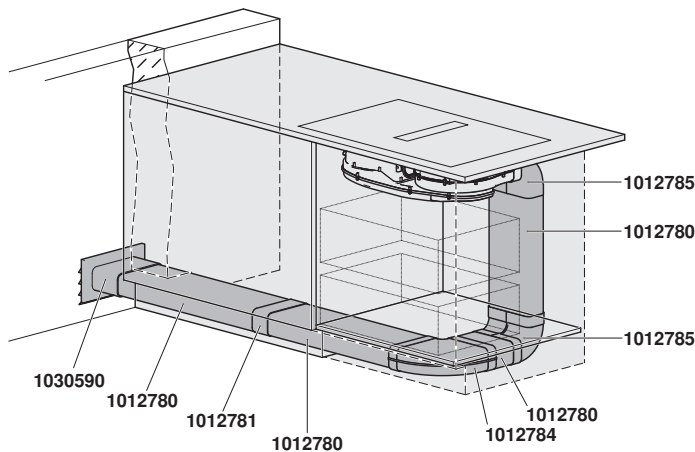


Lateral exhaust air outlet via plinth

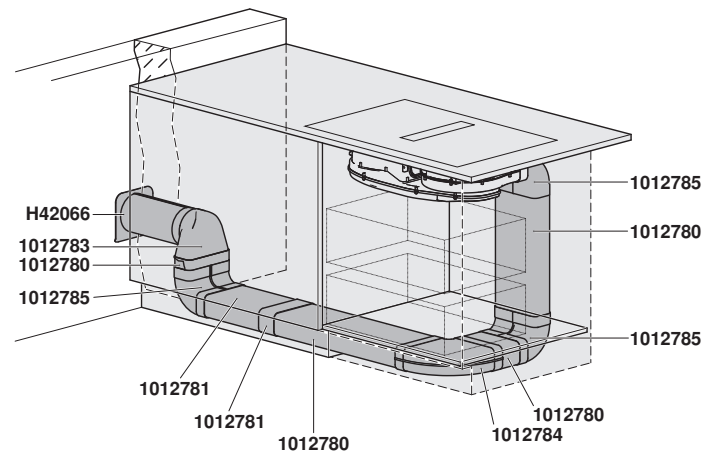


Lateral exhaust air outlet

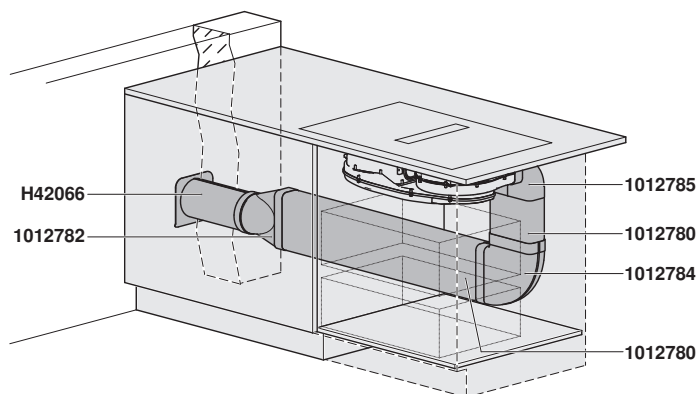

Rear exhaust air outlet with elbow

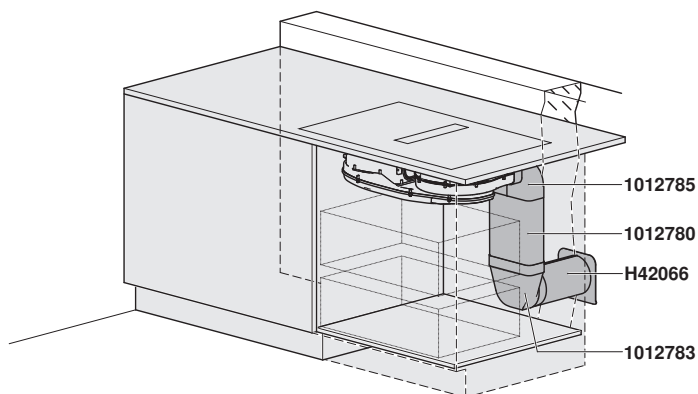


Rear exhaust air outlet straight without elbow

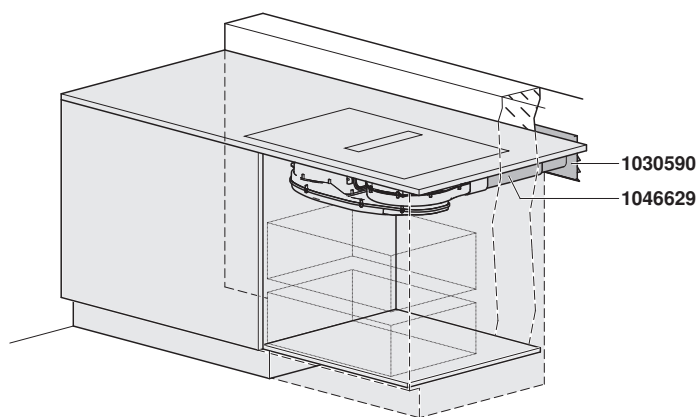


Any constriction of the airflow will reduce extraction performance and increase operating noise.

- If the exhaust duct is to be routed outdoors, we recommend installing a wall box (available as an accessory).
- If the exhaust air is to be ducted into a chimney flue, the intake piece must be aligned with the flow direction of the flue.
- If the exhaust duct runs through cool rooms, lofts, etc., there may be sharp variations in temperature in individual areas. Vapour and condensation is to be expected. This makes it therefore necessary to insulate the exhaust ducting / air duct.



Performance diagram: Exhaust air flow volume

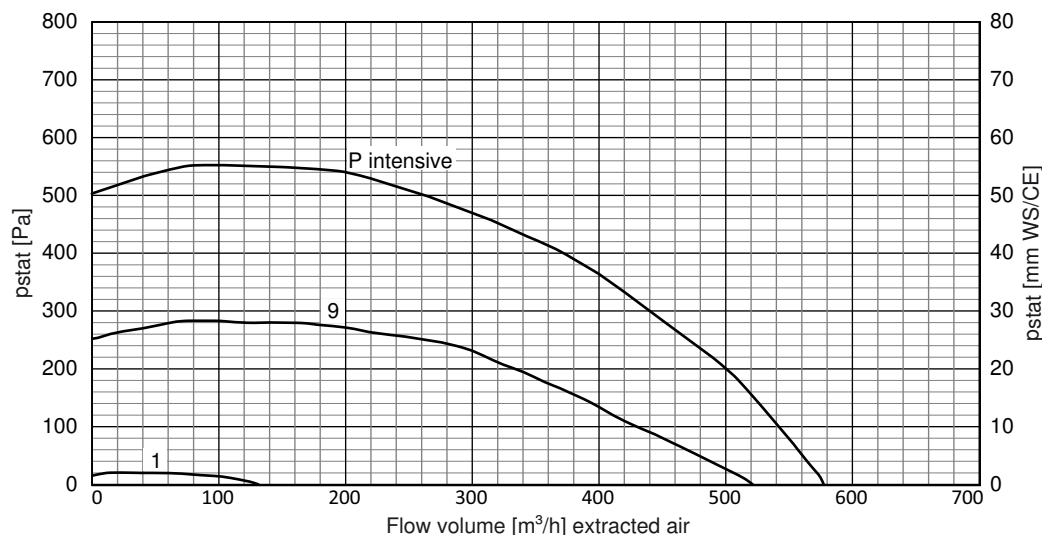

11 Range hoods



Technical information on the range hoods can be found in document «TechInfo for range hoods» under J32836 (EN), 1007182 (IT), 1008408 (DE), 1008409 (FR).

11.1 General notes



If other firing systems are being used at the same time (e.g. wood, gas, oil or coal fired heating appliances), safe operation is only possible providing a room negative pressure of 4 Pa (0.04 mbar) is not exceeded at the location of the appliance.

Risk of toxic fumes! An adequate flow of fresh air must be guaranteed e.g. via non-closable openings in doors or windows and in combination with an air-intake/exhaust-air wall box or by other technical means. Local fire protection regulations must be observed. V-ZUG offers exhaust ducts made of plastic (construction material category RF3) and metal (construction material category RF1).



If the appliance has an options connection, it can be used to open and close an automatic exhaust air / supply air flap. See also Accessories: Control set option, for external roof ventilation fans, room fans and other applications.



Efficient repairs can only be guaranteed if it is possible to uninstall the whole appliance at any time without causing any damage.

Minimum distance to the hob



If a V-ZUG appliance is being combined with a third-party brand (hob or range hood) and the stipulated minimum distance between the combined appliances is different, then the greater of the two must be observed. The minimum distance is measured between the bottom edge of the range hood and the bottom of the pot or pan. If the appliance is installed over gas hobs, each cooking zone must be fitted with an ignition fuse.

Extraction mode



The extracted air must not be fed into a chimney which is used for exhausting fumes from appliances burning gas or other fuels.
Observe the local fire regulations.

Installation notes

- In addition to the correct dimensioning of the exhaust duct, it is also necessary to ensure a sufficient inflow of fresh air. **to replace the air that is being extracted.**
- Avoid routing the exhaust duct to the side through the chimney casing.
- Planning features for non-destructive de-installation and maintenance of the appliance:
 - Do not route telescopic casing in suspended ceilings.
 - Avoid silicone joints between the telescopic casing and the appliance.
 - All plastering, plasterboarding, wall papering or painting work is to be carried out prior to installing the appliance.


11.2 Special hoods



Special hood type DSTS9 (64004) may not be used in combination with gas hobs.
Special hood type DSMS (64005) may only be operated in combination with a gas hob of V-ZUG gas hob type: GAS321x, GAS421x, GAS641x, observing the permitted combination installation variants. The content of the operating and installation instructions for the listed gas hobs must be observed! If operating a permitted gas appliance, the hob hood must be fitted with the dedicated gas deflector 1031218 (accessory)! Operating a gas appliance without the gas deflector is not permitted!


DSMS downdraft hood (64005)

Operating mode	Extraction/Recirculation	Mains connection	220–240 V~ 50–60 Hz
Noise level	62–70 dB (A)	Fuse	10 A
Illumination	—	Fan speeds	4
Motor	1 × 145 W	Weight	~21.5 kg

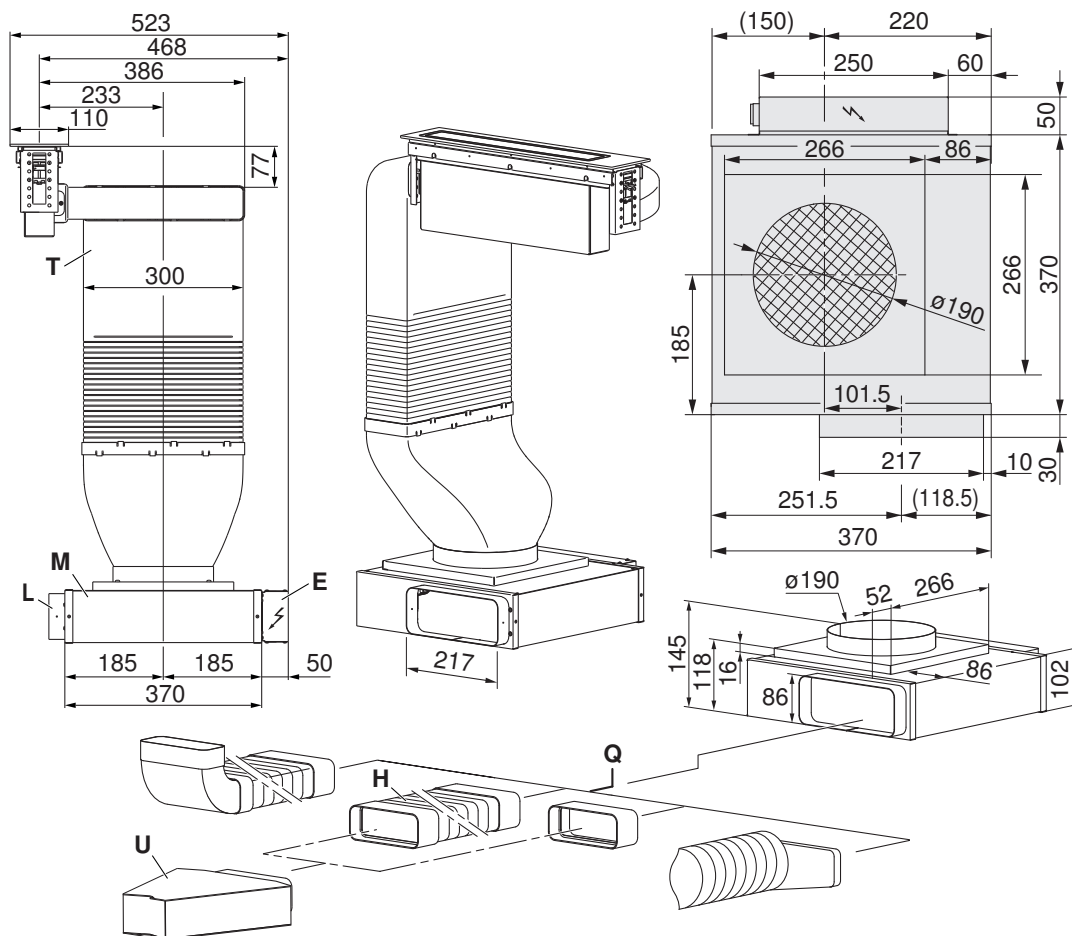


Suitable flat channel systems Q are available for order as accessories.

- The connection between the hob hood and the exhaust air duct **T** can be to the left or right.
- The ventilation outlet **L** can be fed through one of the four sides, however this can change the installation type.
- Depending on space requirements, the exhaust air duct **T** can be adjusted through shortening.
- The control unit **E** can be repositioned (≤ 250 mm) if required.
- Plan a removable **base plate** or **service flap** for fan motor **M** and recirculation box **U** (for recirculation mode).
- Access to the fan motor **M** and the recirculation box **U** is facilitated through extendible flat channel systems **Q**.
Recommendation: Flat flexible elbow **H**, article no. **1012786**, with flexible length (240–600 mm).
- For the recirculation mode, ensure sufficient ventilation so that moisture can escape. Plan in suitable material/wood.

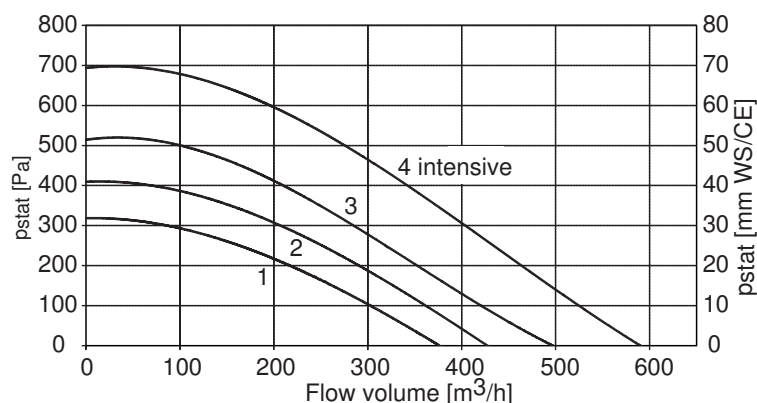

Scope of delivery

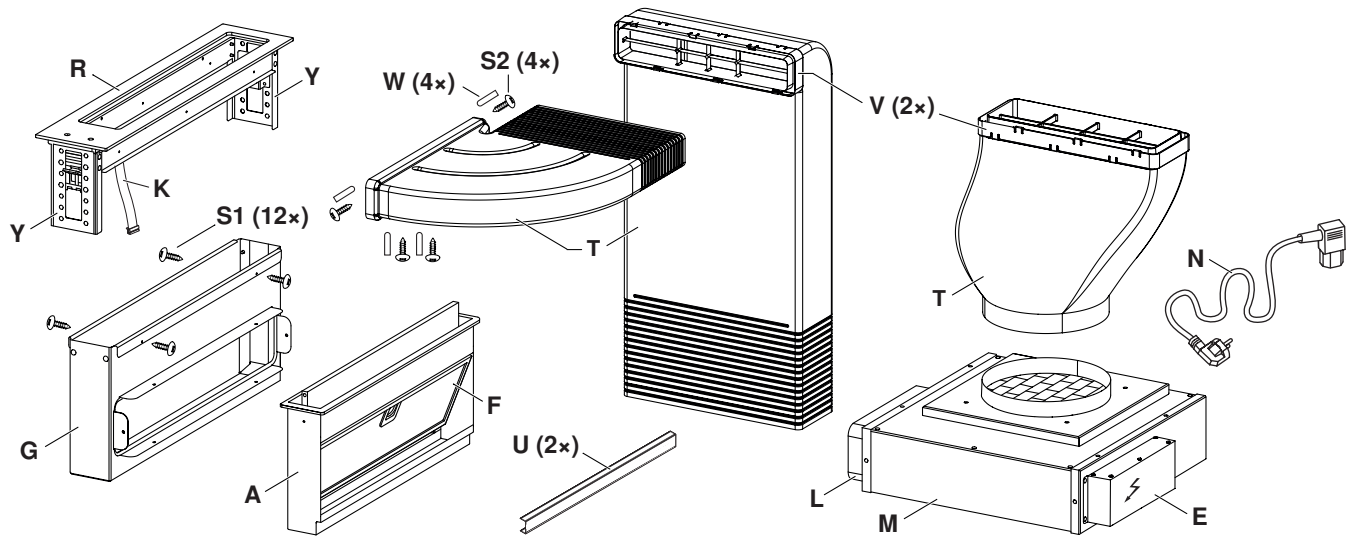

- A** Drip tray frame
- E** Control unit
- F** Metal grease filter
- G** Appliance housing
- K** Control cable
- L** Ventilation outlet
- M** Fan motor


- N** Mains cable length 1.8 m
- Q** Flat channel system
- R** Frame
- T** Exhaust air duct
- U** Spacer profile
- V** Connecting elements
- W** Plastic covers
- Y** Mounting angle (surface-mounted installation)

Accessories:


Recirculation box 1157470

The flat channel system **Q** (accessories) can be used for the installation. Flat channel systems made of plastic, fire protection class RF 3 (see page 117)


Gas deflector 1031218, required accessory when using a permitted V-ZUG gas hob. Operating a gas appliance without the gas deflector is not permitted!

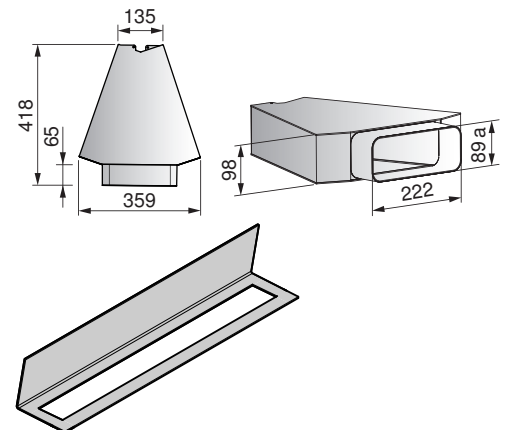

Plastic accessories

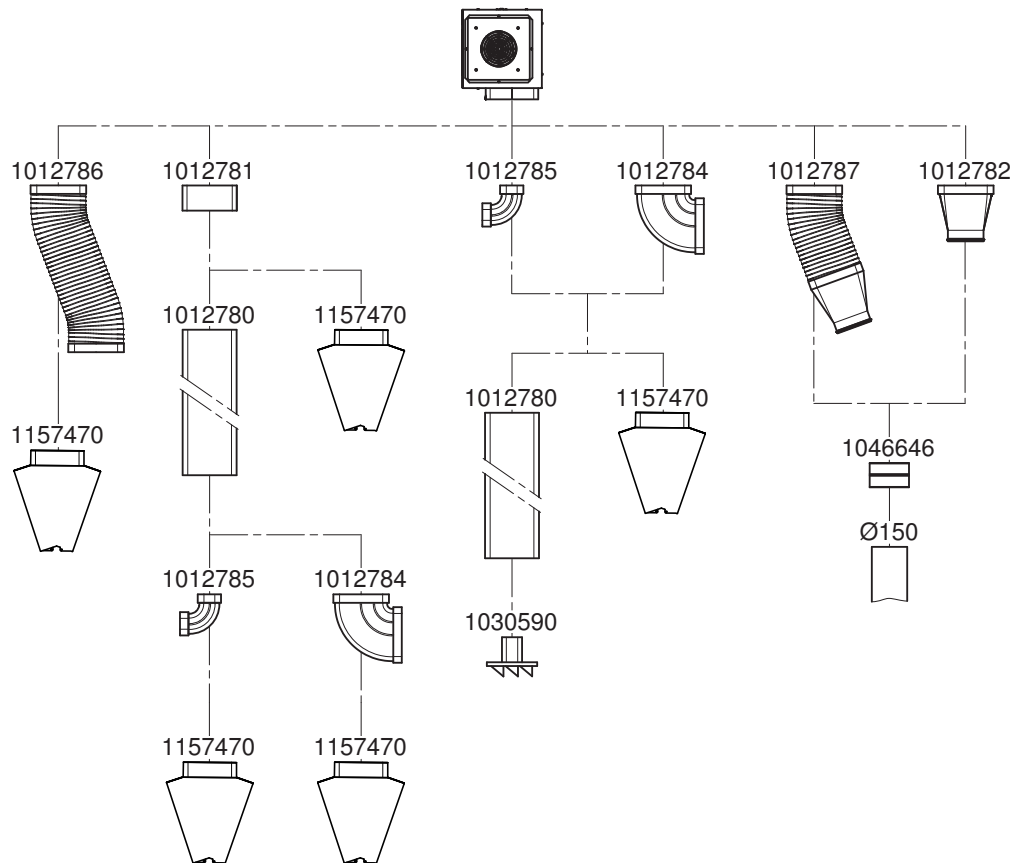

Metal accessories

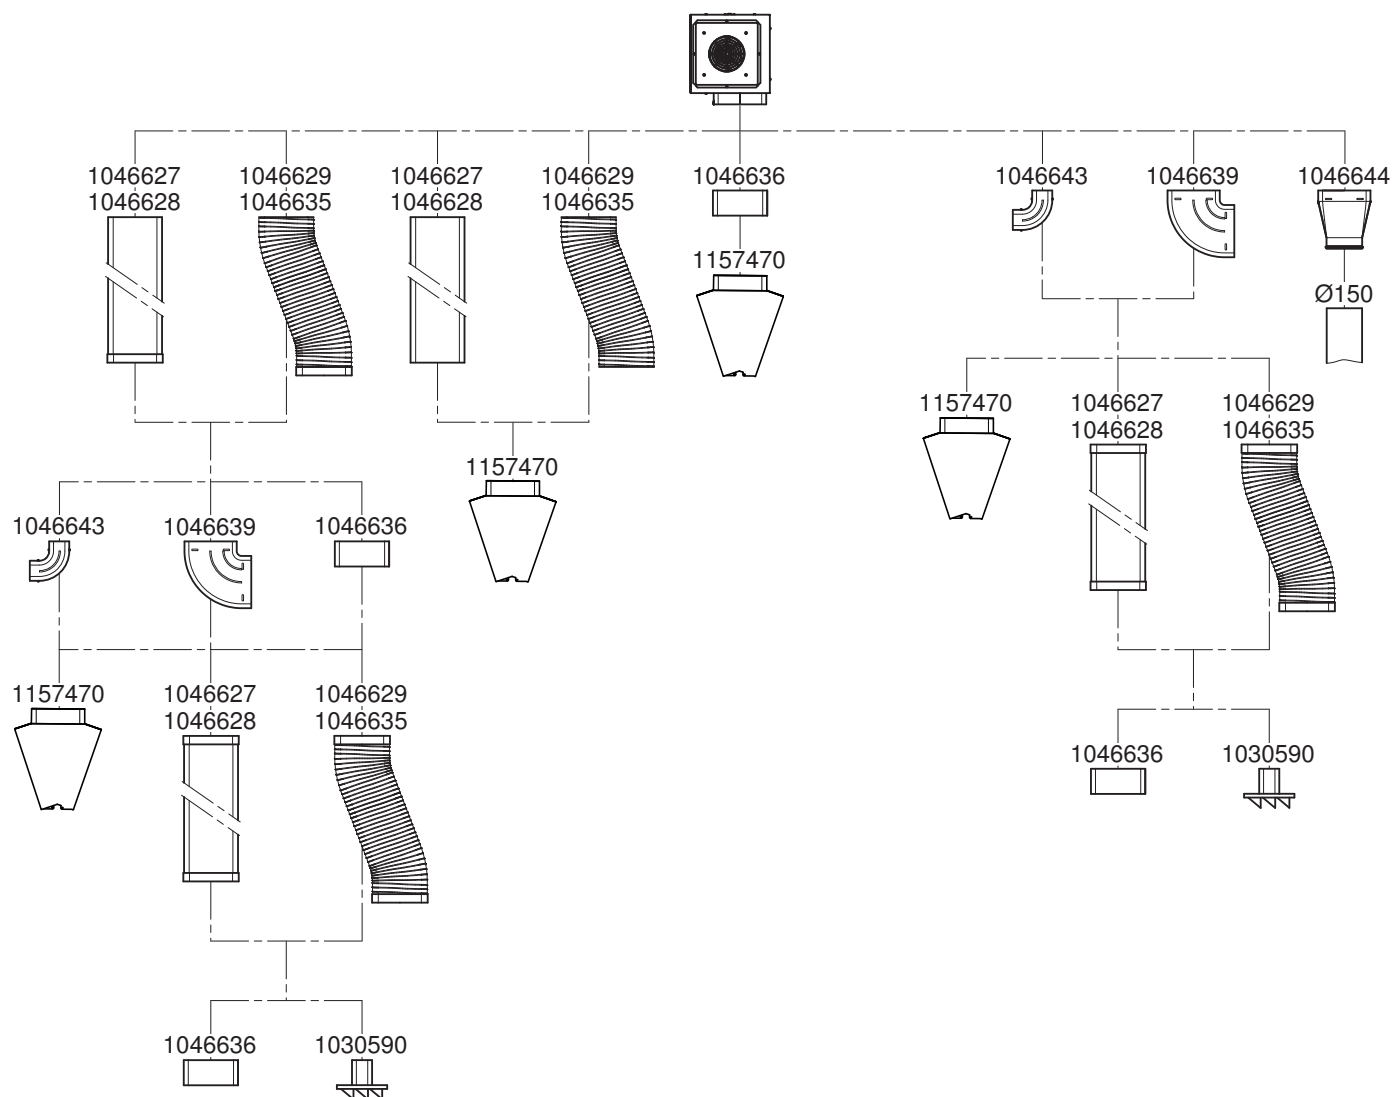

Combination installation


Flush installation

Flush-mounted installation with additional intermediate supports **K** requires the accessory **intermediate support set H63789** (contains two intermediate supports). Flush-mounted combination installation is described in document 1014381.



A WOK glass ceramic hob cannot be surface mounted!

Reason: Glass thickness is 6 mm.

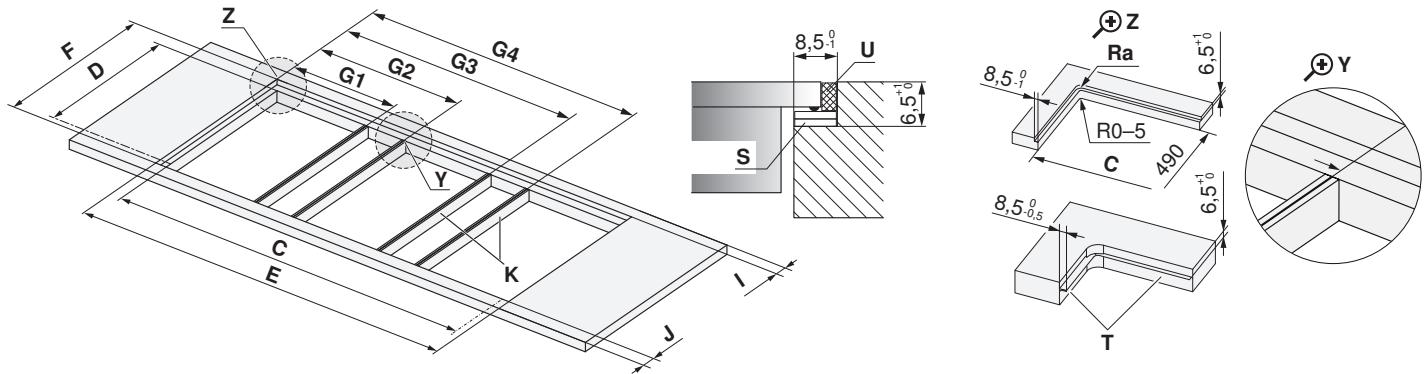


F 507±1 mm
D 490±1 mm
I ≥41.5 mm
J ≥41.5 mm
Ra 5 mm

Ra Outer corner radii of cut-out
K Intermediate support
S Spacer plates
T Steel angle bonded or screw mounted
U Silicone joints

Combinations	Cut-out width E	Cut-out width C	Intermediate support posi- tion G1	Intermediate support posi- tion G2	Intermediate support posi- tion G3	Intermediate support posi- tion G4
30+11+30 cm	684 mm	667 mm	285.5 mm	398.5 mm	-	-
30+11+40 cm	787 mm	770 mm	285.5 mm	398.5 mm	-	-
40+11+40 cm	890 mm	873 mm	388.5 mm	501.5 mm	-	-
11+80+11 cm	993 mm	976 mm	114.5 mm	878.5 mm	-	-
40+11+40+11+40 cm	1390 mm	1373 mm	388.5 mm	501.5 mm	888.5 mm	1001.5 mm
40+11+60+11+40 cm	1577 mm	1560 mm	388.5 mm	501.5 mm	1075.5 mm	1188.5 mm
40+11+70+11+40 cm	1697 mm	1680 mm	388.5 mm	501.5 mm	1195.5 mm	1308.5 mm
40+11+80+11+40 cm	1767 mm	1750 mm	388.5 mm	501.5 mm	1265.5 mm	1378.5 mm

Surface-mounted installation

Surface-mounted installation requires the accessory **side strip set 1028587** and either the intermediate support **K 1019199** (black) or **1014361** (stainless steel). Articles are available for order as accessories. Surface-mounted combination installation is described in document 1013773.

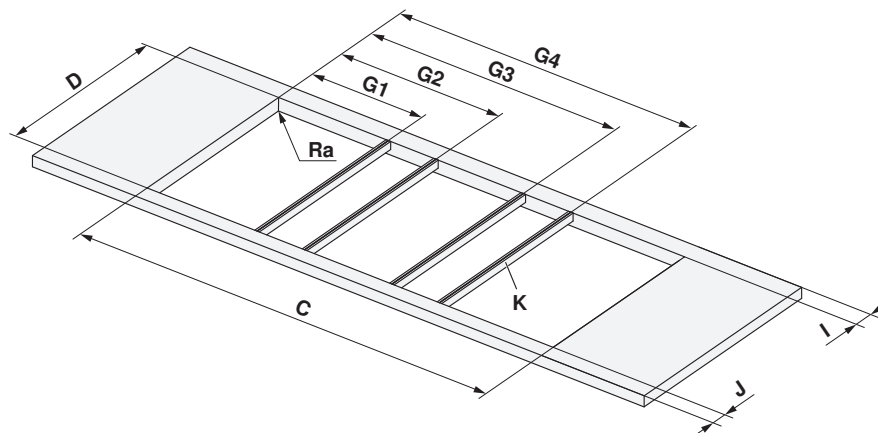


D	490±1 mm
I	≥50 mm
J	≥50 mm
Ra	0–5 mm
Ra	Outer corner radii of cut-out


Combinations	Cut-out width C	Intermediate support position G1	Intermediate support position G2	Intermediate support position G3	Intermediate support position G4
30+11+30 cm	667 mm	277 mm	390 mm	-	-
30+11+40 cm	770 mm	277 mm	390 mm	-	-
40+11+40 cm	873 mm	380 mm	493 mm	-	-
40+11+40+11+40 cm	1373 mm	380 mm	493 mm	880 mm	993 mm
40+11+60+11+40 cm	1560 mm	380 mm	493 mm	1067 mm	1180 mm

Installation overview for base


Wall installation, depth ≥ 600 mm

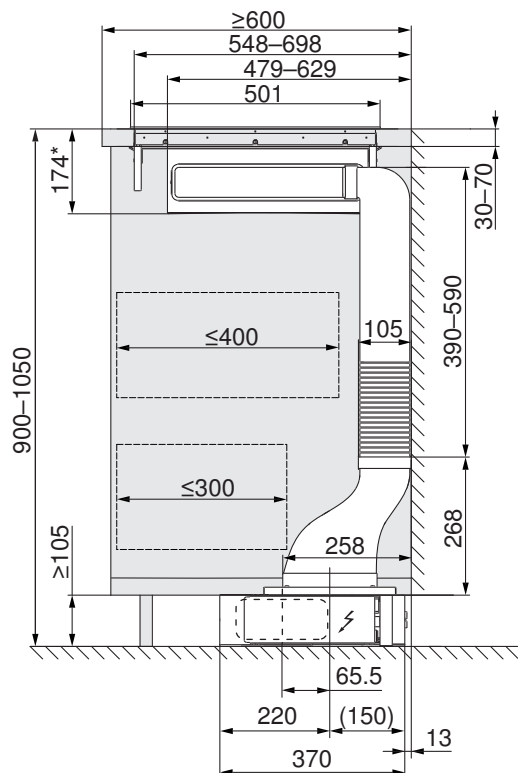


Wall/Island installation, depth ≥ 700 mm

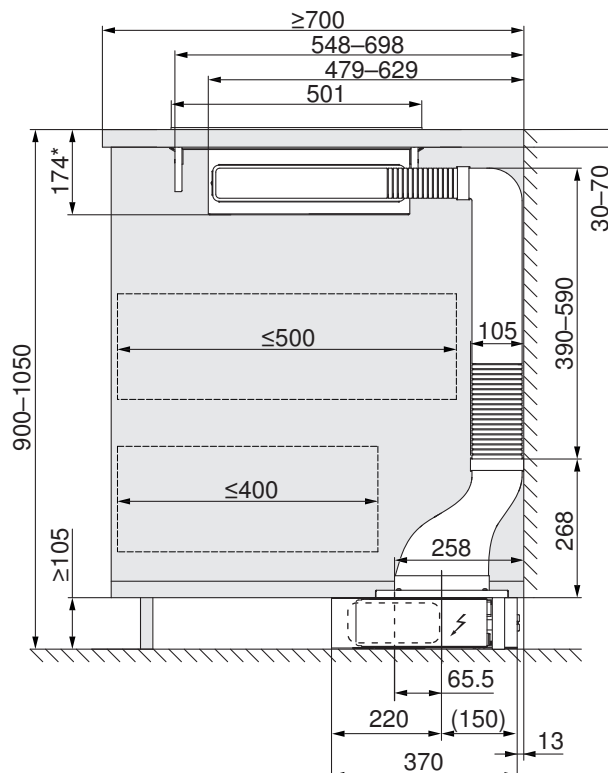

Island installation, depth ≥ 900 mm

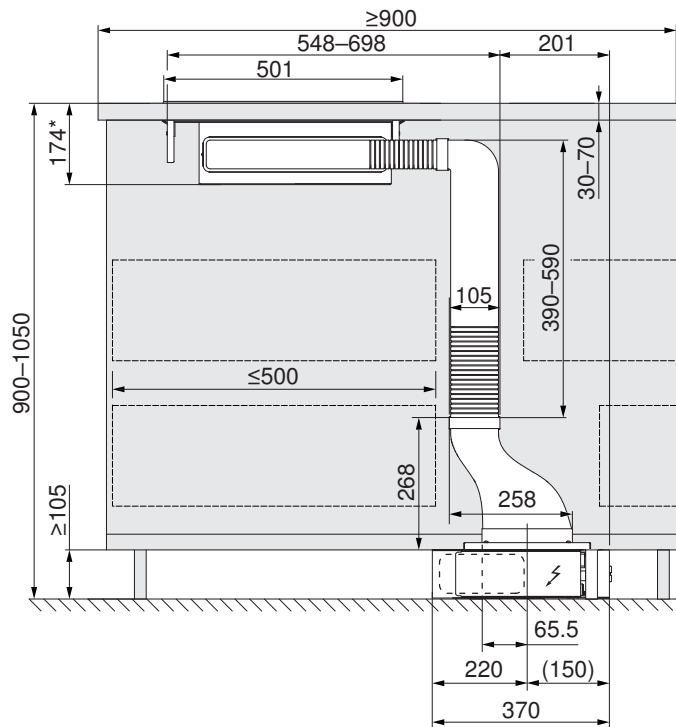

Variant with rotated fan motor

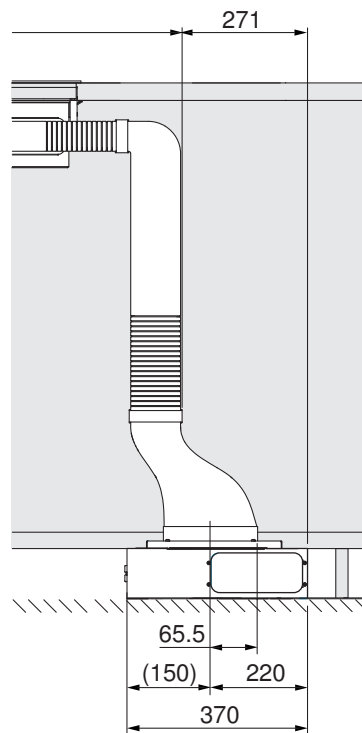


* Flush installation. Surface-mounted installation: 170 mm.

Appliance selection and combination possibilities

1. Planning example: Two hobs

Air duct in base to left/right.

The WOK glass ceramic hob / gas hob **W** is **always** positioned on the opposite side of the exhaust air duct. Standard hob **S**.

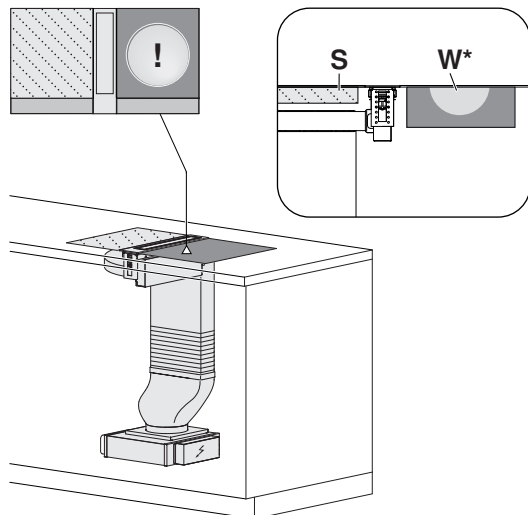




A WOK glass ceramic hob and gas hob may not be combined! In general, the use of a gas wok, in any combination, is not permitted.

2. Example: Three hobs

Air duct in base on both sides to left/right.

The Teppan Yaki hob **P** (600 mm) is positioned in the middle. The WOK glass ceramic hob / gas hob **W** is **always** positioned on the opposite side of the exhaust air duct. Standard hob **S**.

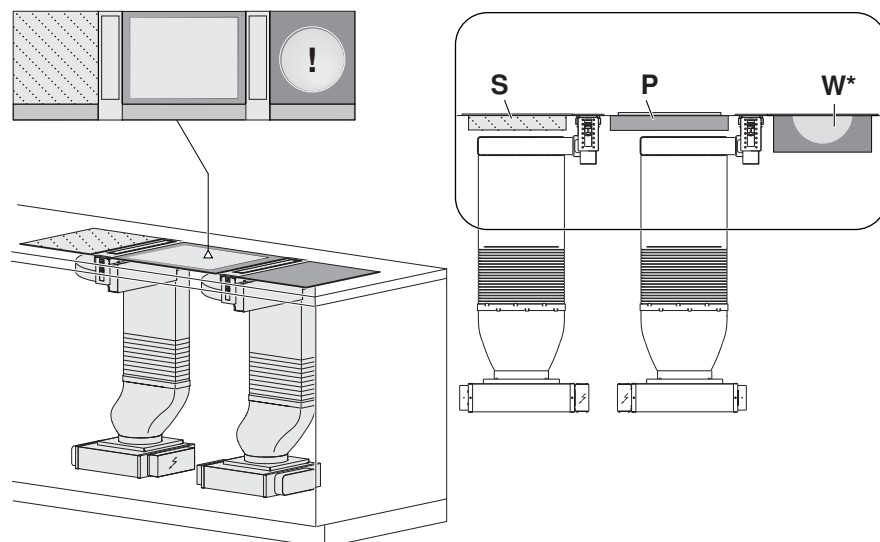

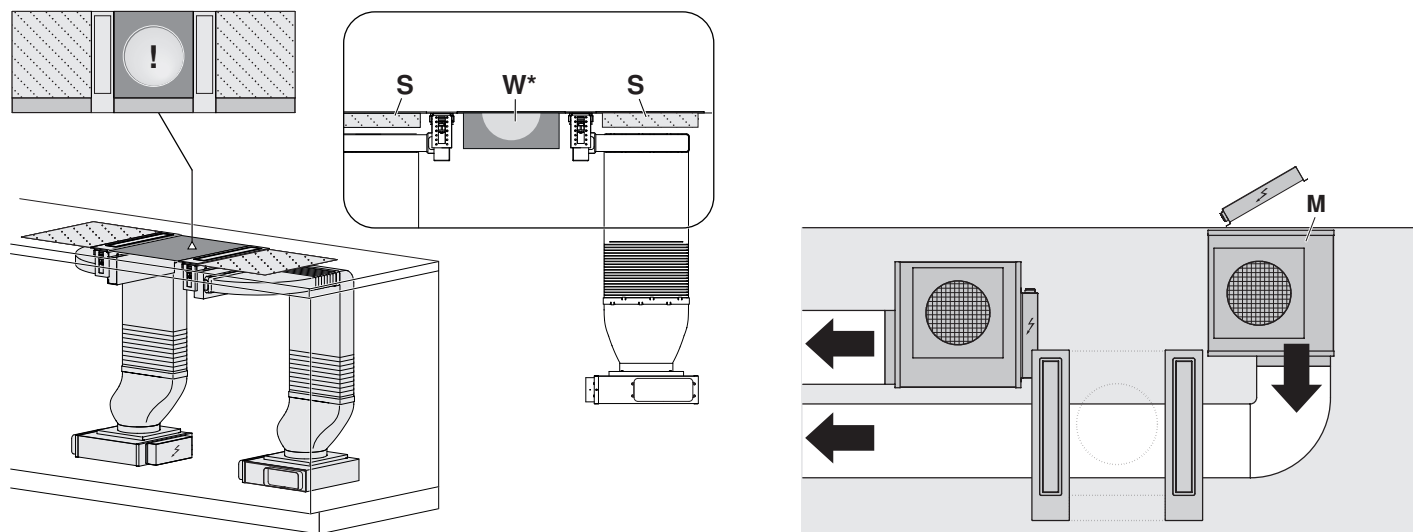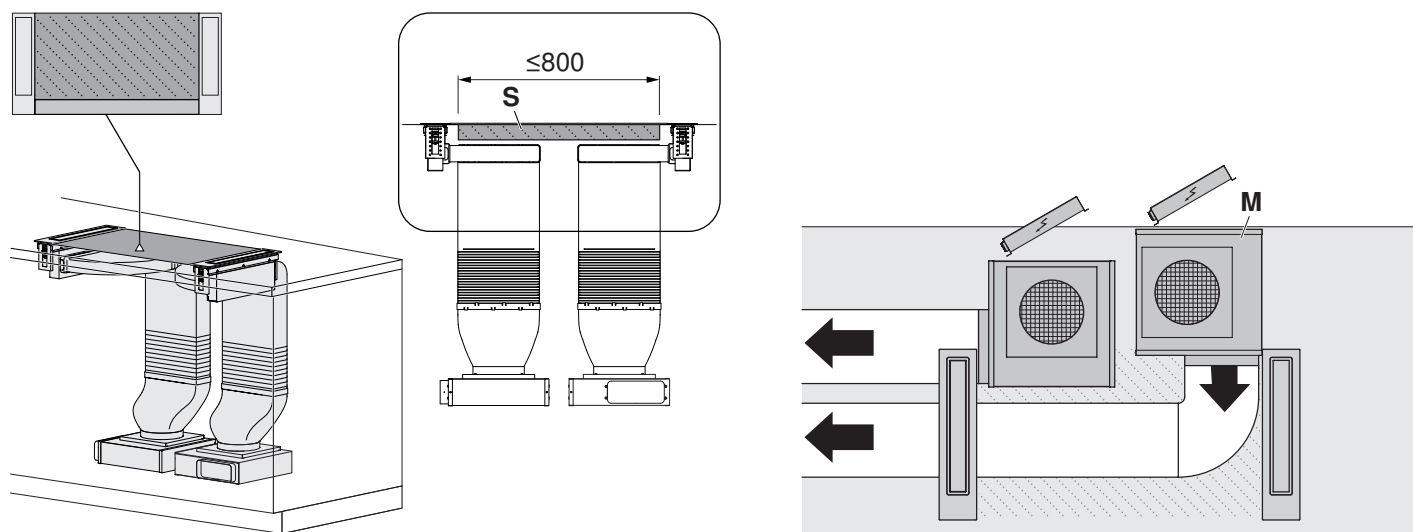3. Example: Three hobs**Air duct in base on both sides to outside.**The WOK glass ceramic hob / gas hob **W** (400 mm) is positioned in the middle. Standard hob **S**. Possible position of 2 fan motors **M**.**4. Example: Large hob positioned in the middle****Air duct in base on both sides to inside for space economy.**Allows standard hob **S** with ≤ 800 mm installation width to be positioned in the middle. The WOK glass ceramic hob / gas hob **W** can **not** be positioned in the middle. Possible position of 2 fan motors **M**.

For use with a gas appliance



The hob hood may only be used with the dedicated gas deflector 1031218 (accessory) with one of the gas appliances listed below. Operating the hob hood without the gas deflector is not permitted!



Permitted gas appliances for use with the hob hood:

V-ZUG gas hob type: **GAS321x**, **GAS421x**, **GAS641x**, observing the permitted combination installation variants.



Combining the hob hood with two gas hobs is not permitted!



Using another gas appliance type/model or manufacturer is not permitted and can cause lasting damage to the hob hood.

Failure to observe the above instruction can cause lasting bodily harm and lasting damage to property and the appliance. In such a case, any and all liability, guarantee and goodwill claims will be rejected, now and in the future!



Burns hazard!

The appliance and surrounding components get hot during operation! Allow the fan flap, gas deflector and other components to cool down before touching them.



Fire hazard!


Grease deposits can build up in the grease filter and catch fire. Clean the grease filter regularly. Only operate the appliance with the gas deflector.

Permitted installation variants (V-ZUG gas hob only)

As a variant may also be installed on either side of the appliance.


A Caution: Hot surface!

B Gas deflector correctly mounted.

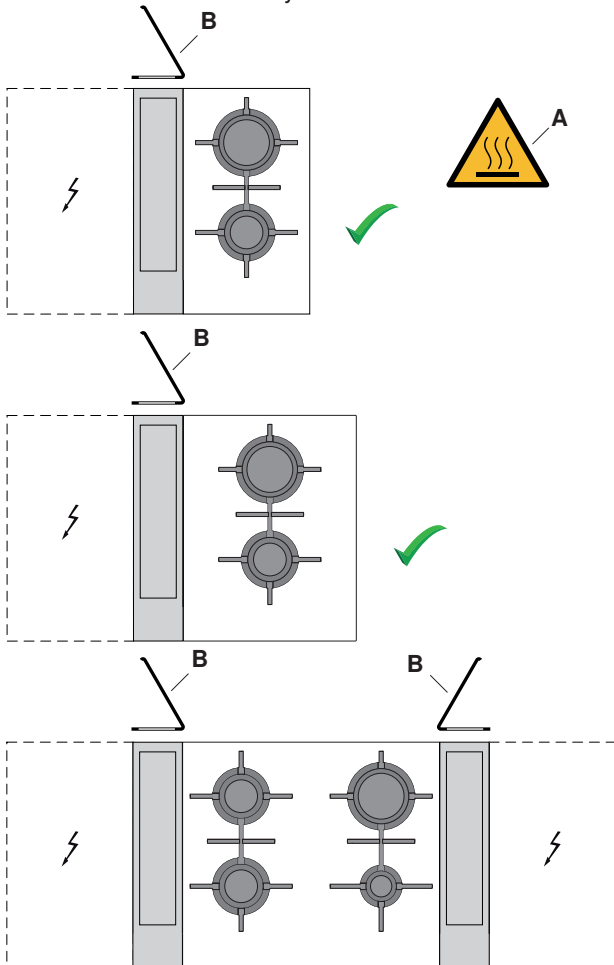

The gas deflector 1031218 (required accessory) reduces the deflection/disturbance of the gas flame at the burner and prevents it being extinguished by a draft.


- Open fan flap 1.
- Set the gas deflector 2 in the correct position relative to the gas appliance.
- Switch on hob hood 3.

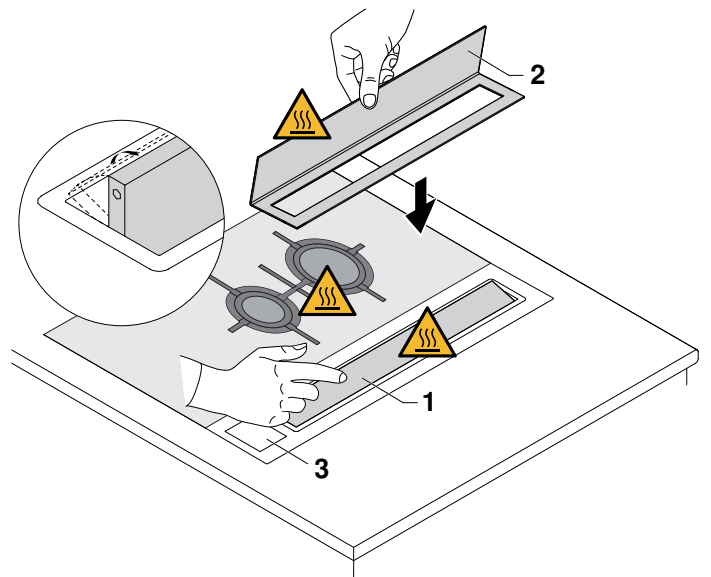

Installation variant for recirculation hob hood with «recirculation box»

Example: Recirculation mode with recirculation box

Flat flexible elbow **H**, article no. **1012786**, with flexible length (240–600 mm) easy installation/access to fan motor **M** and recirculation box **U**.

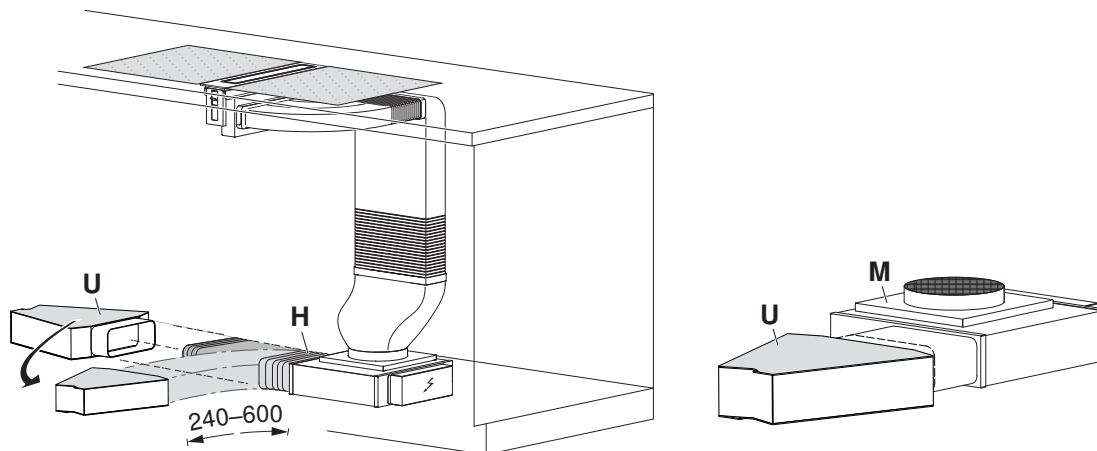

Plan in enough space for maintenance work and ensure access to the fan motor and the recirculation box (for replacing the activated charcoal filters)! Exhaust air outlet cross section: Plan min. 500 cm² for exhaust air in base area.




Dedicated accessories that need to be fitted to operate the appliance in the recirculation mode: article no. 1157470 recirculation box with activated charcoal filters!

Installation variant for extraction hob hood

Example: Extraction mode with flat channel (round channel also possible).

Plan in length of flat channel system to air outlet of **max. 7000 mm**. If the exhaust duct is to be routed outdoors, we recommend installing a telescopic wall box (accessory available for order).



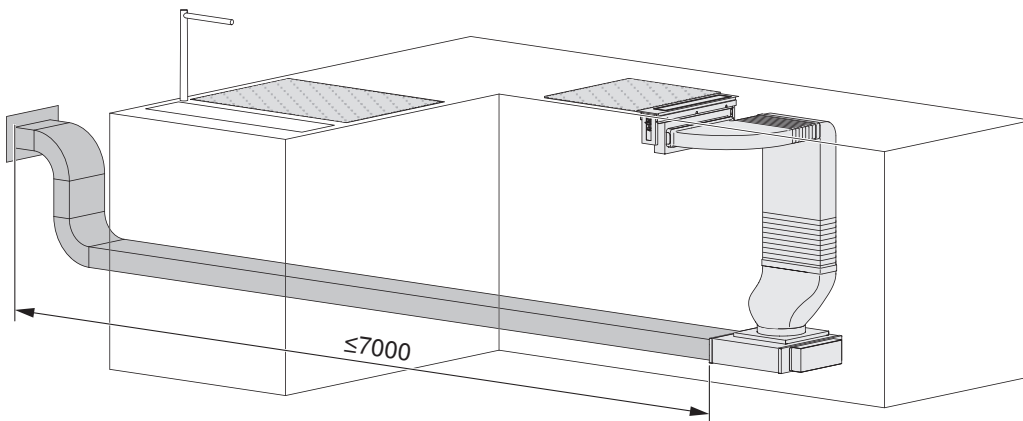


Ensure enough space for maintenance work and access to the fan motor and flat channel system!

DSTS9 downdraft hood (64004)

Operating mode	Extraction/Recirculation
Noise level	49–69 dB (A)/43–76 dB (A)
Illumination	1 × 6 W
Motor	1 × 270 W
Surface-mounted installation variant	


Mains connection	220–240 V~ 50–60 Hz, 276 W
Fuse	10 A
Fan speeds	4
Weight	~35 kg
Flush installation variant	

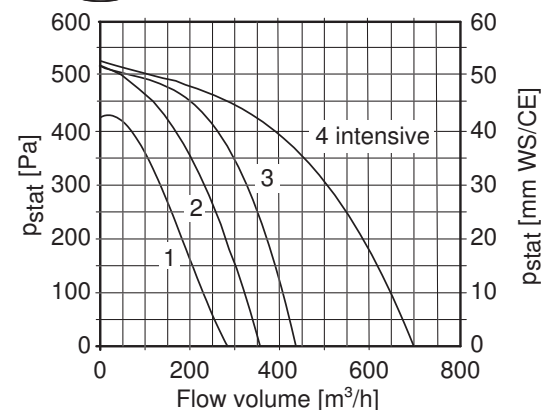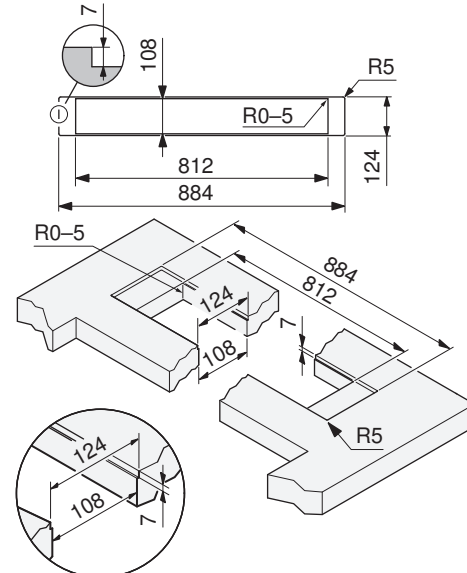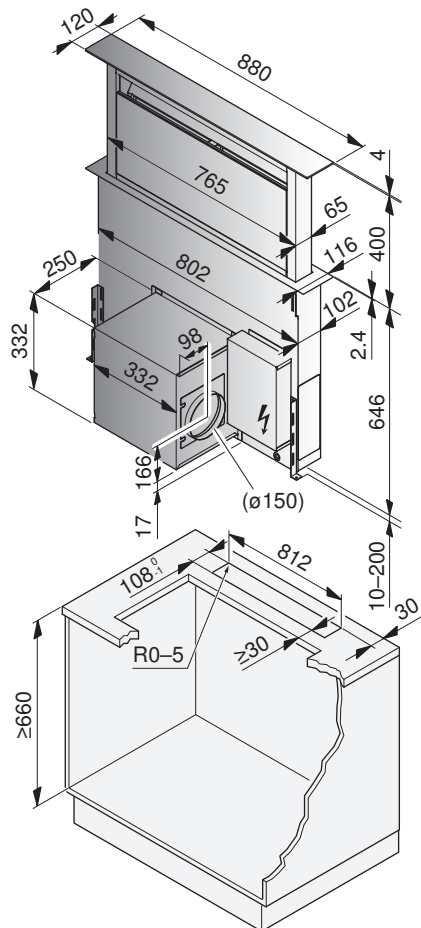**Recommendation for hob type:** GK46TIMPS..., GK47TIMPS...

- As an alternative, the motor housing may be planned and mounted to the range hood from the back, though access must be guaranteed from the front for service and installation.
- The exhaust connection can be positioned to point in one of four directions.
- If using recirculation box 1157470, a transition piece 1012782 or H42078 is needed for its installation. See Flat channel systems made of plastic, fire protection class RF 3 (see page 117).


Accessories:

Recirculation box with activated charcoal filters 1157470

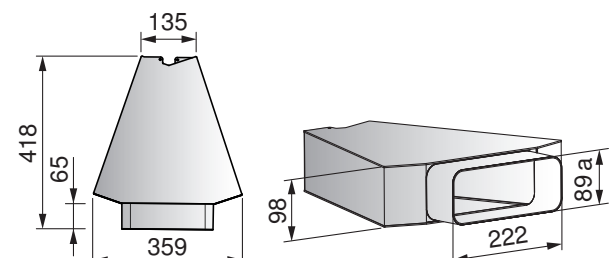

or

Long-life activated charcoal filter 1012163

**Exhaust air outlet cross section: Plan min. 500 cm² for exhaust air in base area.**

11.3
Built-in hoods

Applicable to the following hoods:

- Connection cable 1.2 m with plug

Positions of electrical connections

The specified dimensions are valid for straight exhaust air piping. If exhaust air piping with an elbow are used, the dimensions must be adapted accordingly.


Appliance	Connection from floor (plinth height 100 mm)	Connection in niche (from centre to connection)	Type of connection
All models	2050 mm	180 mm	Flush power socket 220–240 V

AiroClearCabinet V4000 (64009/64010)

Operating mode	Extraction/Recirculation	Mains connection	220–240 V~ 50 Hz, 269 W
Noise level	49–67 dB (A)	Fuse	10 A
Illumination	2 × 2 W	Fan speeds	4
Motor	265 W	Weight	19.6 kg / 22.9 kg

Use of stone cladding

20 mm thick wall panels (granite, marble) are possible.





Minimum distance B above hob:


For electric hob: 500 mm
For gas hob: 750 mm
Note on minimum distance (see page 71)

Ex works A

(*) Options C/D/E: Options for positioning elec. box and air outlet.

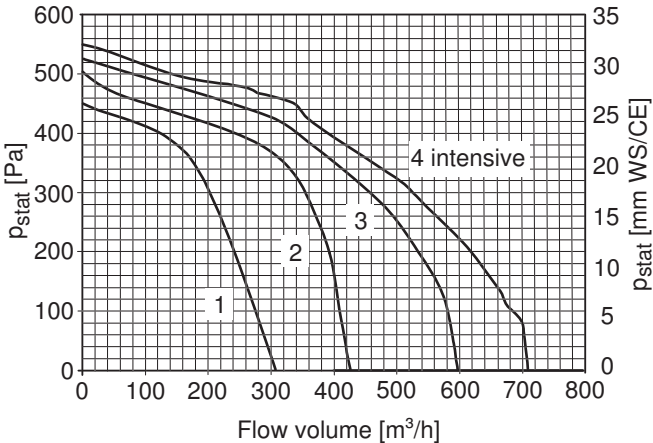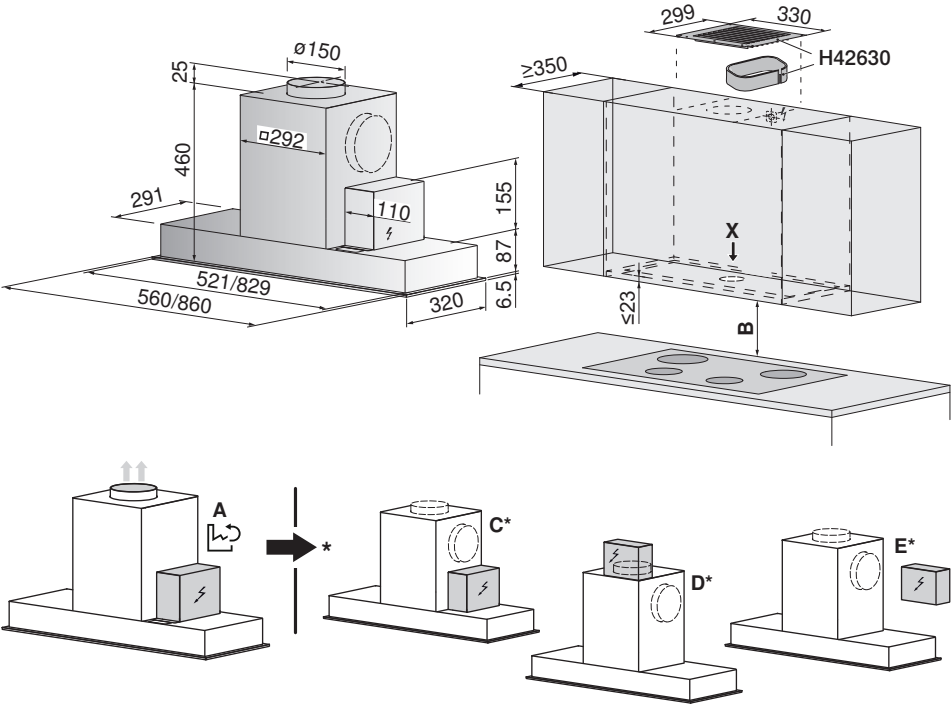

Cut-out for wall unit (view X)

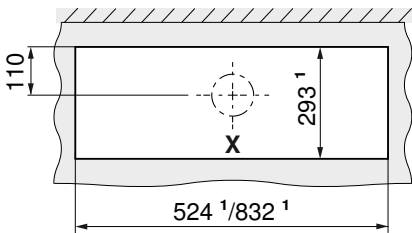


¹ Cut-out measurements

AiroClearCabinet V4000 Twin Blower (64011)


Operating mode	Extraction
Noise level	56–71 dB (A)
Illumination	2 × 2 W
Motor	2 × 265 W

Mains connection	220–240 V~ 50 Hz, 534 W
Fuse	10 A
Fan speeds	4
Weight	27 kg.

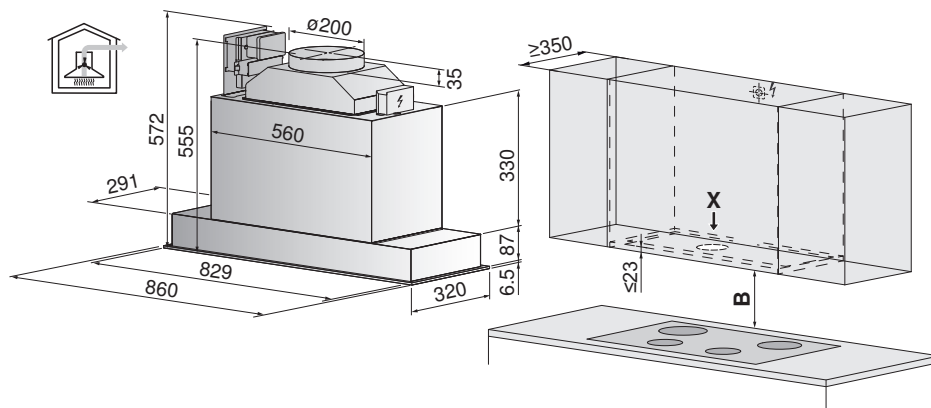

Use of stone cladding

20 mm thick wall panels (granite, marble) are possible.




Minimum distance B above hob:


For electric hob: 500 mm

For gas hob: 750 mm


Note on minimum distance (see page 71)

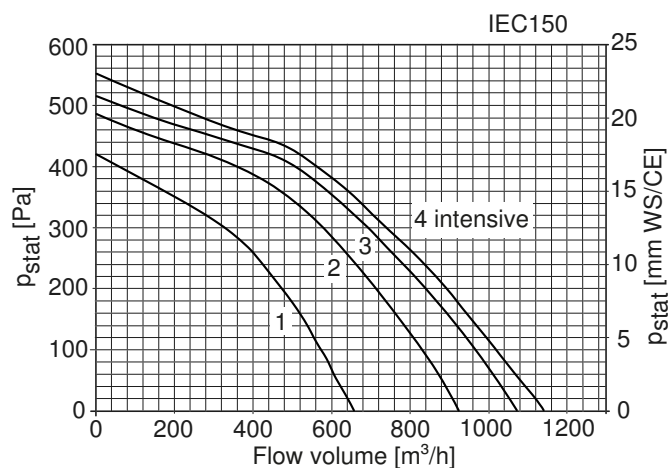

Cut-out for wall unit (view X)

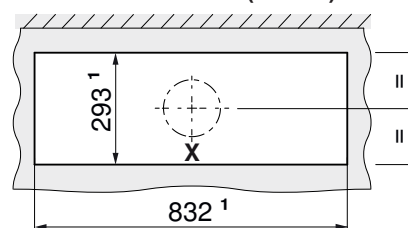

¹ Cut-out measurements

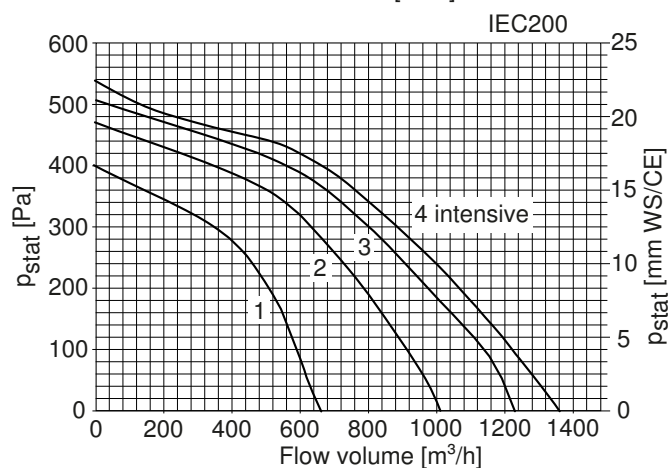

12 Dishwashers

12.1 General notes



Efficient repairs can only be guaranteed if it is possible to uninstall the whole appliance at any time without causing any damage.



At any time it must be possible to pull the appliance out of the niche horizontally without dismantling any part of the cabinet.



For work surfaces that are susceptible to moisture, use work surface protection W70163.

General operating conditions

Ambient temperature: from min. 10 °C to max. 35 °C

The appliances are designed for use up to a max. altitude of 2,000 m above sea level.


Validity

Model designation	Type	Model number
AdoraDish V2000	AS2T	41108
AdoraDish V6000	AS6T	41118, 41120

Dishwashers with heat pump (see page 95)

12.2 Electrical connection data / plumbing in

Example of connection

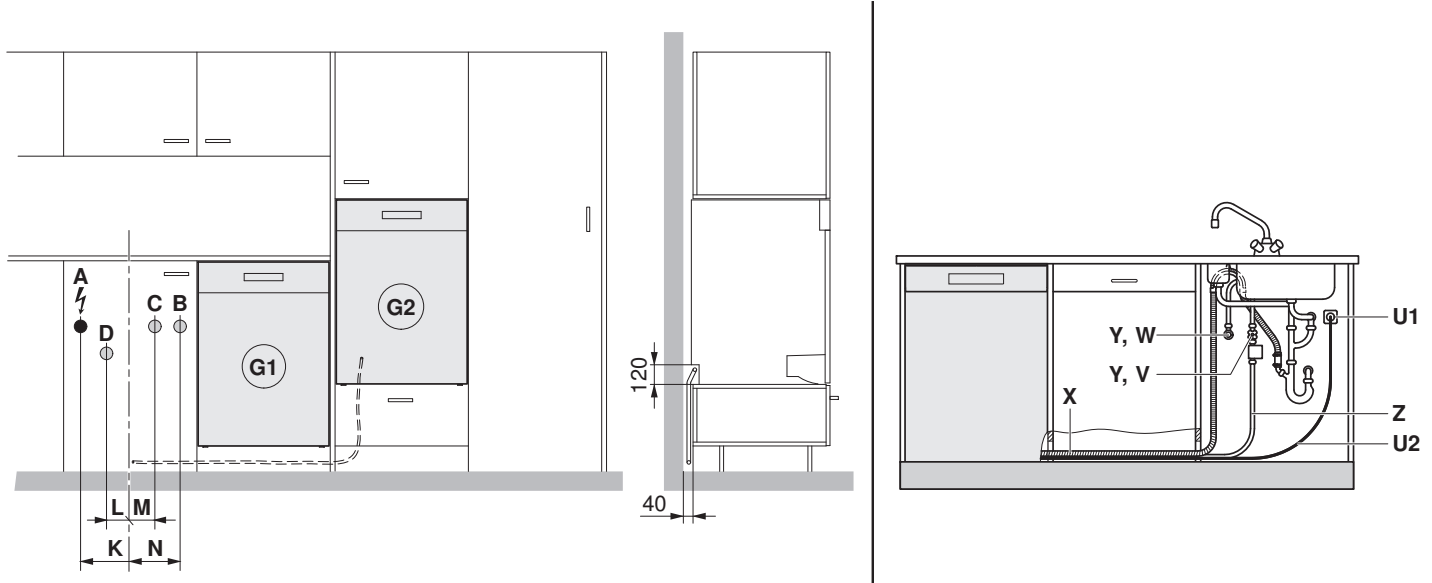

Designation		Connection from floor (plinth height 105 mm)	Connection in niche (from centre to connection)	Type of connection
A	Electrical connection	600 mm	K = 160 mm	Flush power socket 220–240 V
B	Cold water	600 mm	N = 170 mm	G $\frac{3}{4}$ "
C	Hot water *	600 mm	M = 70 mm	G $\frac{3}{4}$ "
D	Outlet	400 mm	L = 110 mm	ø56 mm
G1	Dishwasher in base unit	Connection in adjacent compartment left or right		
G2	Dishwasher in tall unit	Connection in max. 2 compartments left or right		
U1	Power socket	Yes		
U2	Connection cable	Length 1.50 m **		
V	Cold water connection	Yes		
W	Hot water connection *	Yes		
X	Drain hose	Length 1.55 m ** / internal diameter = 22 mm		
Y	Shut-off devices	Yes, $\frac{3}{4}$ "		
Z	Aquastop / water inlet with filter, G $\frac{3}{4}$ "	Length 1.55 m **		

* The hot water connection can be activated for a water flow temperature of at least 45 °C to maximum 60 °C. For the "No heating" function, a water flow temperature of 60 °C is recommended.

** If the standard connection length is not long enough, order the CS set with a longer connection length (AdoraDish (see page 124)).



Special lengths must be connected directly to the appliance. Lengthening the inlet and drain hoses is not permitted.

Electrical connection data



General information on the electrical connections and an overview of the positions can be found in section Overview of connections, ranges and dimensions (see page 5).

Model designation	Type	Model number	Rated load	Mains connection	Fuse	Mains cable
AdoraDish V6000	AS6T	41118, 41120	2200 W	220–240 V~ 50 Hz	10 A	1.5 m, with plug
AdoraDish V2000	AS2T	41108	2200 W	220–240 V~ 50 Hz	10 A	

Plumbing-in data



For special cases with water hardness in excess of 50 °fH, an external water softener is recommended.

Value		Nominal value	Minimum	Maximum
Mains pressure (0.1 MPa = 1 bar)	Static	0.3–0.4 MPa	0.1 MPa	1.0 MPa
	Flowing	–	0.08 MPa	1.0 MPa
Water hardness		–	0.5 °fH	50 °fH
Water inlet temperature		–	5 °C	60 °C


12.3 Installation overview

Depending on niche height **H**, either standard or extra height appliances or only one of the two can be installed.

Niche height **H** in mm


	790	800	810	820	830	840	851	860	870	880	890	900	910	920	930	940	950	960
250												S						G
240												S	S				G	G
230										S	S	S				G	G	G
220									S	S	S	S			G	G	G	G
210								S	S	S	S	S		G	G	G	G	G
200							S	S	S	S	S	S	G	G	G	G	G	G
190						S	S	S	S	S	S	S/G	G	G	G	G	G	G
180					S	S	S	S	S	S	S/G	S/G	G	G	G	G	G	G
170				S	S	S	S	S	S	S/G	S/G	S/G	G	G	G	G	G	G
160			S	S	S	S	S	S	S/G	S/G	S/G	S/G	G	G	G	G	G	G
150		S	S	S	S	S	S	S/G	S/G	S/G	S/G	S/G	G	G	G	G	G	G
140	S	S	S	S	S	S	S/G	S/G	S/G	S/G	S/G	S/G	G	G	G	G	G	G
130	S	S	S	S	S	S	S/G	S/G	S/G	S/G	S/G	G	G	G	G	G	G	
120	S	S	S	S	S	S	S/G	S/G	S/G	S/G	G	G	G	G	G	G		
110	S	S	S	S	S	S	S/G	S/G	S/G	G	G	G	G	G	G			
107	S	S	S	S	S	S	S/G	S/G	S/G	G	G	G	G	G				
100	S	S	S	S	S	S	S/G	S/G	G	G	G	G	G	G				
90	S	S	S	S	S	S	S/G	G	G	G	G	G	G					
80	S	S	S	S	S	S	G	G	G	G	G	G						
70	S	S	S	S	S		G	G	G	G	G							
60	S	S	S	S			G	G	G	G								
50	S	S	S				G	G	G									
40	S	S					G	G										
30	S						G											
23							G											

S	Standard
G	Extra height
S/G	Standard and extra height






12.4 Drilling plans for decor panel 60 cm

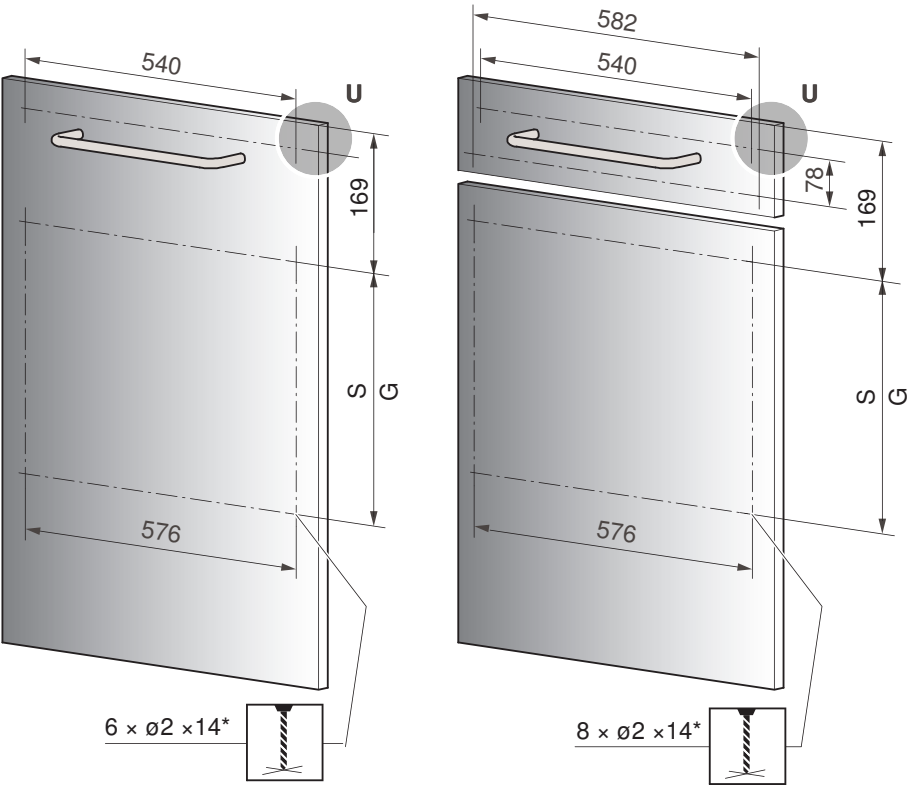

S = Standard height	G = Extra height	*
350 mm	415 mm	Depth drilled from the back

Detail U




12.5 Dishwasher with niche width 60 cm



For worktops that are susceptible to moisture ingress, use worktop protection W70163.

Base unit «standard»

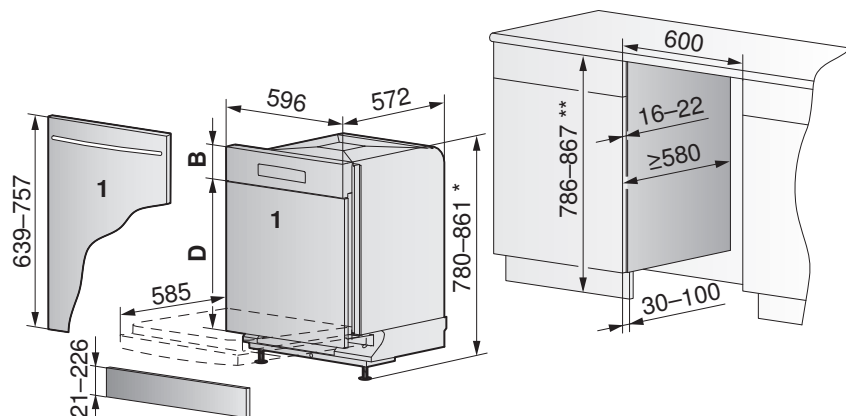


* From 861 up to max. 896 with a second runner only, can be ordered under W82930

** From 867 up to max. 902 with a second runner only, can be ordered under W82930

► Front panel / decor system (wood) 1 must be cut to the required dimensions.

		Niche height H in mm											Min. S in mm
Dimension A in mm ↑ Min. ↓ Max.	790	800	810	820	830	840	850	860	870	880	890	900	
	27	37	47	57	67	77	87	97	107	117	127	137	2
	37	47	57	67	77	87	97	107	117	127	137	147	2
	47	57	67	77	87	97	107	117	127	137	147	157	2
	57	67	77	87	97	107	117	127	137	147	157	167	2
	67	77	87	97	107	117	127	137	147	157	167	177	2
	77	87	97	107	117	127	137	147	157	167	177	187	2
	87	97	107	117	127	137	147	157	167	177	187	197	2
	97	107	117	127	137	147	157	167	177	187	197	207	2
	107	117	127	137	147	157	167	177	187	197	207	217	5
	117	127	137	147	157	167	177	187	197	207	217	227	10
	127	137	147	157	167	177	187	197	207	217	227	237	15
	137	147	155	167	177	187	197	207	217	227	237	247	23
	145	155	165	175	185	195	205	215	225	235	245	255	30



The permissible weights of the front panel / decor panel system 1 depend on the design variant:


Decor system	Fully integrated
Minimum weight	5 kg
Maximum weight	7 kg
Maximum weight with strong springs (special set W84603)	Up to 10 kg

- The weight dimensions only apply to uniform decor panels up to 22 mm thick.
- For decor panels that are thick or uneven (e.g. frame constructions or bevelled glass plates), the CS set «Door hinge brake» (art. no. 1011228) can be used to provide additional stability to the appliance door when pushed open (see page 124).



For different dimensions / decor panel weights, check using the “Calculation of special decor panel for dishwashers” tool: <https://www.vzug.com/b2b/au/en/planningaid>

Base unit «extra height»

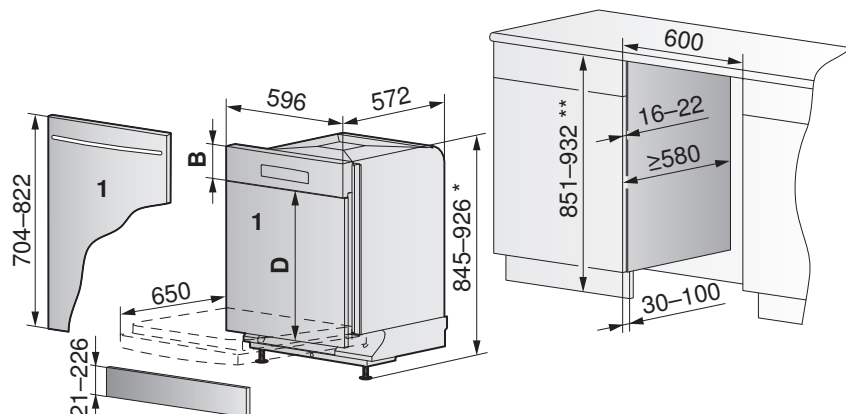


* From 926 up to max. 961 with a second runner only, can be ordered under W82930

** From 932 up to max. 967 with a second runner only, can be ordered under W82930

► Front panel / decor system (wood) 1 must be cut to the required dimensions.

		Niche height H in mm												Min. S in mm
Dimension A in mm ↑ Min.	851	860	870	880	890	900	910	920	930	940	950	960		
	23	32	42	52	62	72	82	92	102	112	122	132		2
	33	42	52	62	72	82	92	102	112	122	132	142		2
	43	52	62	72	82	92	102	112	122	132	142	152		2
	53	62	72	82	92	102	112	122	132	142	152	162		2
	63	72	82	92	102	112	122	132	142	152	162	172		2
	73	82	92	102	112	122	132	142	152	162	172	182		2
	83	92	102	112	122	132	142	152	162	172	182	192		2
	93	102	112	122	132	142	152	162	172	182	192	202		2
	103	112	122	132	142	152	162	172	182	192	202	212		5
	113	122	132	142	152	162	172	182	192	202	212	222		10
	123	132	142	152	162	172	182	192	202	212	222	232		15
Max.	133	142	152	162	172	182	192	202	212	222	232	242		23
	141	150	160	170	180	190	200	210	220	230	240	250		30



The permissible weights of the front panel / decor panel system 1 depend on the design variant:

Decor system	Fully integrated
Minimum weight	5 kg
Maximum weight	7.5 kg
Maximum weight with strong springs (special set W84604)	Up to 9 kg




- The weight dimensions only apply to uniform decor panels up to 22 mm thick.
- For decor panels that are thick or uneven (e.g. frame constructions or bevelled glass plates), the CS set «Door hinge brake» (art. no. 1011228) can be used to provide additional stability to the appliance door when pushed open (see page 124).



For different dimensions / decor panel weights, check using the “Calculation of special decor panel for dishwashers” tool: <https://www.vzug.com/b2b/au/en/planningaid>


Tall unit «standard»

Can also be installed in base unit on plinth

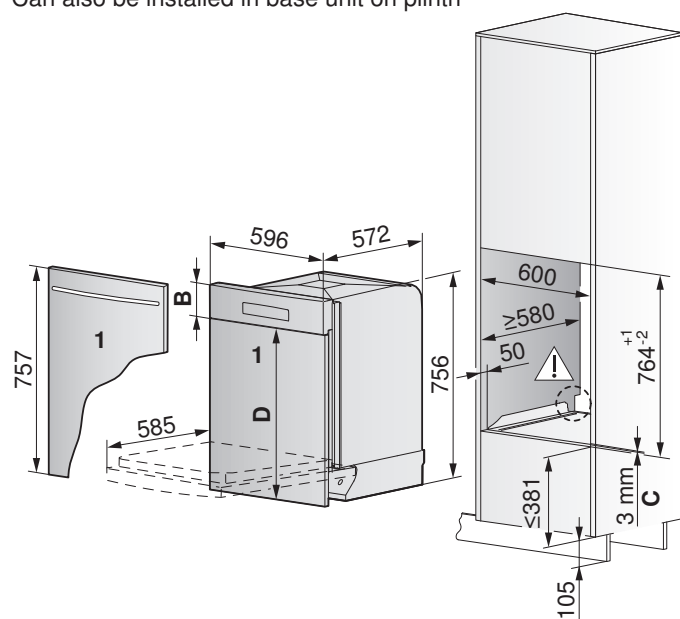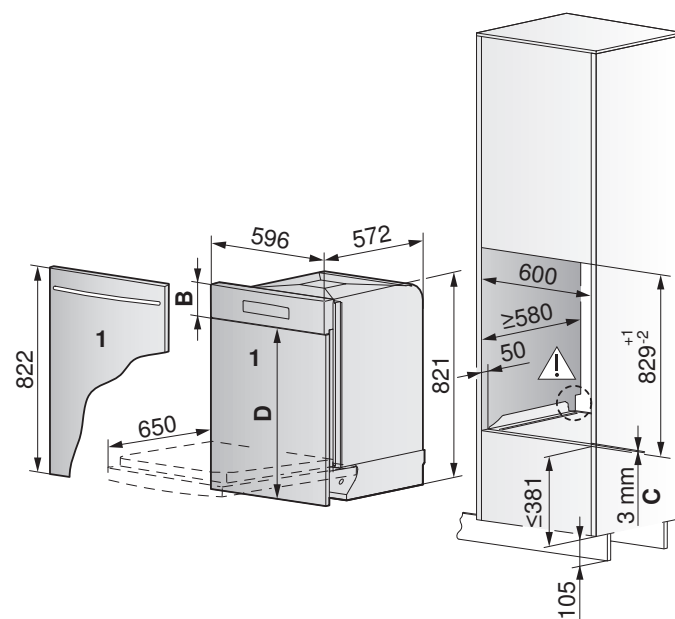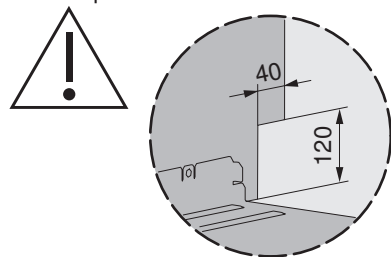
Tall unit «extra height»

C Slide plate *


* Slide plate conversion set for tall unit must be ordered from V-ZUG, see Accessories (see page 124).

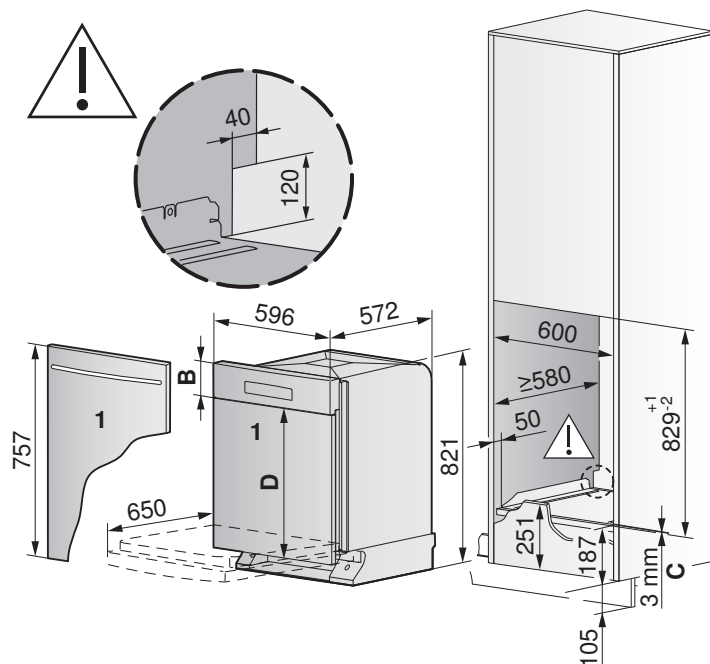Tall unit «extra height» with decor panel and drawer 251 mm




C Slide plate *

E Removable cover strip




* Slide plate conversion set for tall unit must be ordered from V-ZUG, see Accessories (see page 124).

Cross-section of installation variant

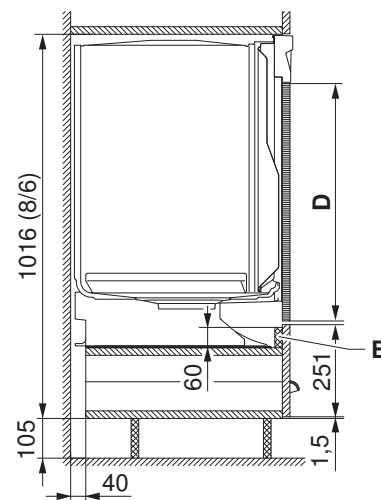

Installing extra-long decor panel

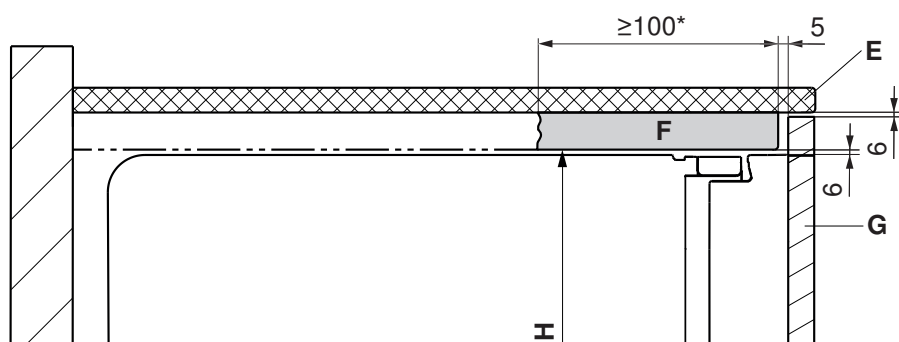

* A continuous soffit vent is recommended.

- E Worktop
- F Continuous soffit vent
- G Decor panel
- H Niche height

13 Dishwashers with heat pump

13.1 General notes



It must be possible to pull the appliance out of the niche horizontally at any time without dismantling any part of the cabinet.

- Screws and fasteners must be countersunk in the niche. There should be no protruding parts, screw heads, brackets, etc., otherwise parts of the appliance could become damaged (risk of water damage).

⇒ Efficient repairs can only be guaranteed if it is possible to uninstall the whole appliance at any time without causing any damage.



It must be ensured air gap remains in the shadow gap.



General operating conditions

Ambient temperature: from min. 10 °C to max. 35 °C


The appliances are designed for use up to a max. altitude of 2,000 m above sea level.

Validity

Model designation	Type	Model number
AdoraDish V6000	AS6T	41121

13.2 Electrical connection data / Plumbing-in data

Connection example

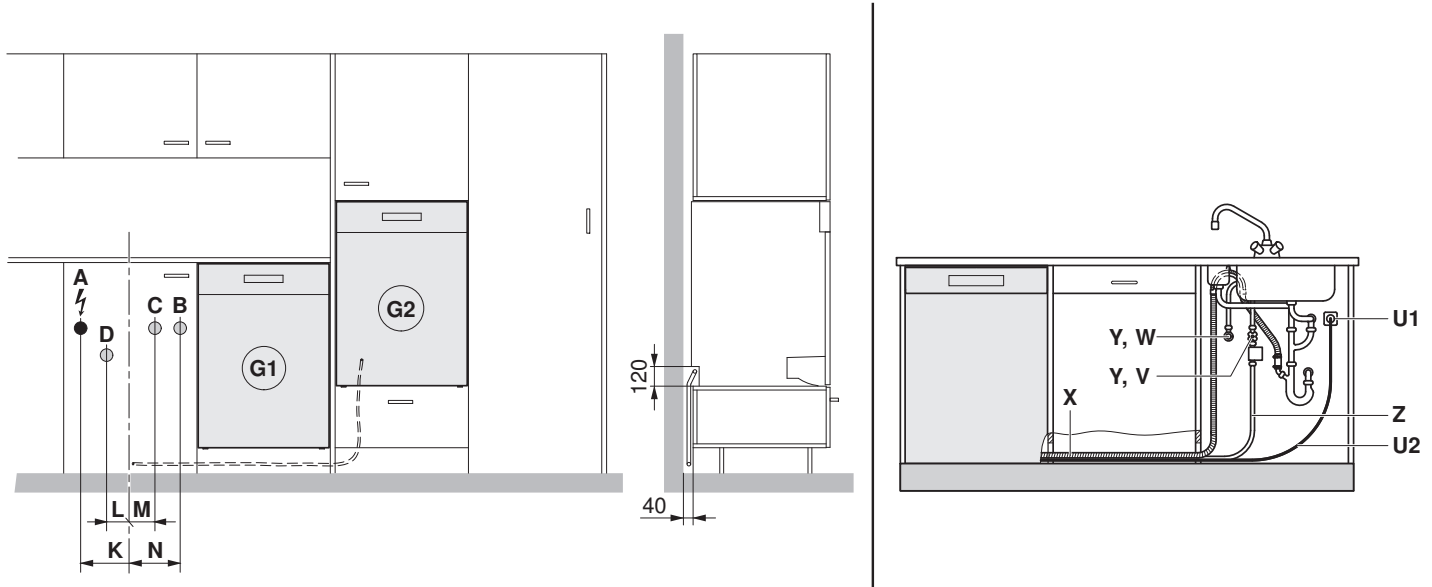

Designation		Connection from floor (plinth height 105 mm)	Connection in niche (from centre to connection)	Type of connection
A	Electrical connection	600 mm	K = 160 mm	Flush power socket 220–240 V
B	Cold water	600 mm	N = 170 mm	G $\frac{3}{4}$ "
C	Hot water *	600 mm	M = 70 mm	G $\frac{3}{4}$ "
D	Outlet	400 mm	L = 110 mm	ø56 mm
G1	Dishwasher in base unit	Connection in adjacent compartment left or right		
G2	Dishwasher in tall unit	Connection in max. 2 compartments left or right		
U1	Power socket	Yes		
U2	Connection cable	Length 1.50 m **		
V	Cold water connection	Yes		
W	Hot water connection *	Yes		
X	Drain hose	Length 1.55 m ** / internal diameter = 22 mm		
Y	Shut-off devices	Yes, $\frac{3}{4}$ "		
Z	Aquastop / water inlet with filter, G $\frac{3}{4}$ "	Length 1.55 m **		

* The hot water connection can be activated for a water flow temperature of at least 45 °C to maximum 60 °C. For the "No heating" function, a water flow temperature of 60 °C is recommended.

** If the standard connection length is not long enough, order the CS set with a longer connection length (AdoraDish (see page 124)).



Special lengths must be connected directly to the appliance. Lengthening the inlet and drain hoses is not permitted.

Electrical connection data



General information on the electrical connections and an overview of the positions can be found in section Overview of connections, ranges and dimensions (see page 5).

Model designation	Type	Model number	Rated load	Mains connection	Fuse	Mains cable
AdoraDish V6000	AS6T	41121	2200 W	220–240 V~ 50 Hz	10 A	1.5 m, with plug

Plumbing-in data



For special cases with water hardness in excess of 50 °fH, an external water softener is recommended.


Value		Nominal value	Minimum	Maximum
Mains pressure (0.1 MPa = 1 bar)	Static	0.3–0.4 MPa	0.1 MPa	1.0 MPa
	Flowing	–	0.08 MPa	1.0 MPa
Water hardness		–	0.5 °fH	50 °fH
Water inlet temperature		–	5 °C	60 °C

13.3 Installation summary



Keep base compartment unobstructed, appliance stands on the floor.


		Nischenhöhe H in mm				
Mass A in mm		870	880	890	900	910
	200					S
	190				S	S
	180			S	S	S
	170		S	S	S	S
	160	S	S	S	S	S
	150	S	S	S	S	S
	140	S	S	S	S	
	130	S	S	S		
	120	S	S			
	110	S				
	105	S				



S Standard ohne Möbelsockel




13.4 Drilling plans for decor panel 60 cm

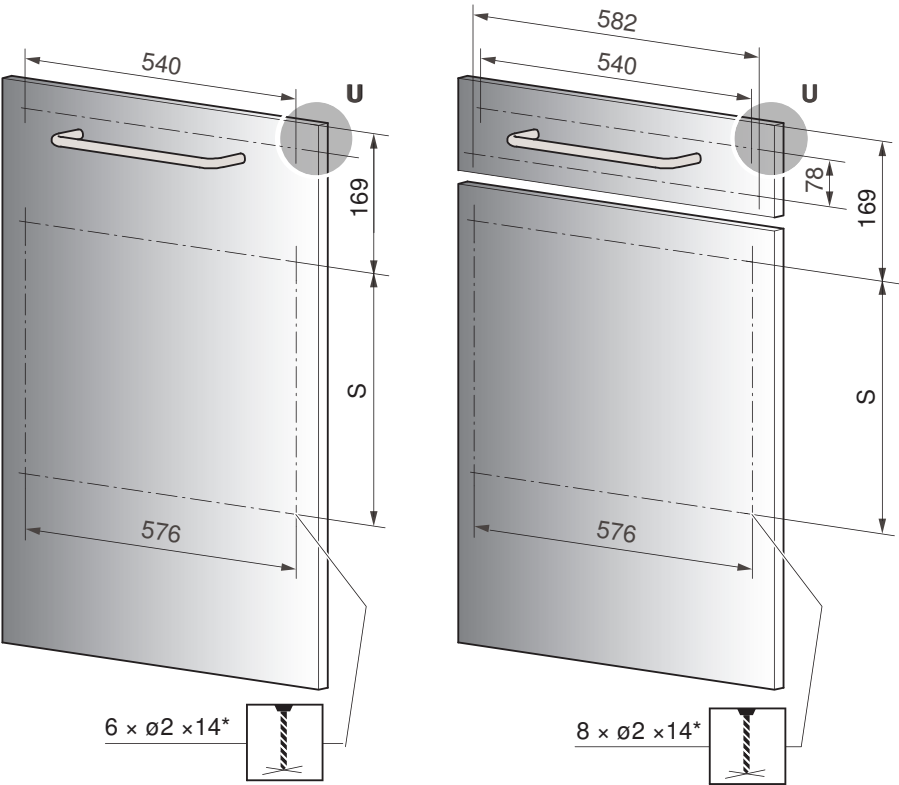

S = Standard height	*
350 mm	Depth drilled from the back

Detail U




13.5 Dishwasher with niche width 60 cm



For worktops that are susceptible to moisture ingress, use worktop protection W70163.


Base unit

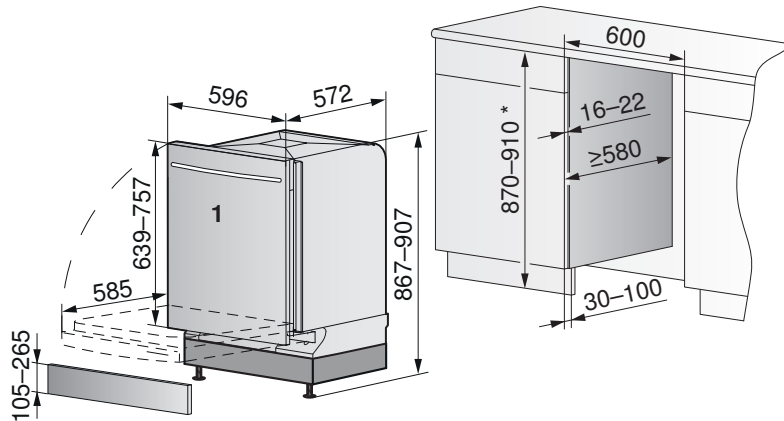

* If the niche height is greater than 910 mm, a plate must be placed underneath the appliance or an extra-long decor panel must be used.

► Front panel / decor system (wood) **1** must be cut to the required dimensions.

Niche height H in mm						Min. S in mm
	870	880	890	900	910	
Dimension A in mm ↑ Min. ↓ Max.	107	117	127	137	147	2
	117	127	137	147	157	2
	127	137	147	157	167	2
	137	147	157	167	177	2
	147	157	167	177	187	2
	157	167	177	187	197	2
	167	177	187	197	207	2
	177	187	197	207	217	2
	187	197	207	217	227	5
	197	207	217	227	237	10
	207	217	227	237	247	15
	217	227	237	247	257	23
	225	235	245	255	265	30

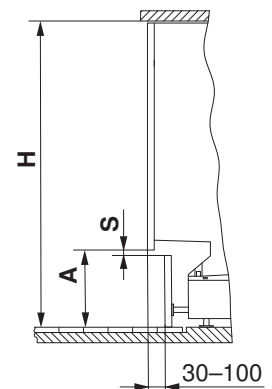

Decor system	Fully integrated
Minimum weight	5 kg
Maximum weight	7 kg
Special set of strong springs W84603	Up to 10 kg

- The weight dimensions only apply to uniform decor panels up to 22 mm thick.
- For decor panels that are thick or uneven (e.g. frame constructions or bevelled glass plates), the CS set «Door hinge brake» (art. no. 1011228) can be used to provide additional stability to the appliance door when pushed open (see page 124).



For different dimensions / decor panel weights, check using the “Calculation of special decor panel for dishwashers” tool: <https://www.vzug.com/b2b/au/en/planningaid>

14 Refrigerators

14.1 General notes



Insufficient ventilation can cause a malfunction and shorten the life of the appliance.

Heavy door panel weights shorten the service life of the door hinges. Observe maximum permissible weight.

Efficient repairs can only be guaranteed if it is possible to uninstall the whole appliance at any time without causing any damage.

In an open-plan kitchen and living room, higher noise emissions can be expected if the ventilation slits face into the room.

14.2 Electrical connection data

Appliance	Climate class	Mains connection	Fuse	Mains cable
Refrigerators				
CombiCooler V6000 Supreme (51096)	SN-T	220–240 V~ 50 Hz	10 A	2.2 m, with plug
Cooler V6000 Supreme (51098)	SN-T			
Winecoolers				
WineCooler V4000 90 (51102)	SN-ST	220–240 V~ 50 Hz	10 A	2.2 m, with plug
WineCooler V6000 Supreme (51097)	SN-T	220–240 V~ 50 Hz	10 A	2.2 m, with plug
Freezers				
Freezer V6000 Supreme (51099)	SN-T	220–240 V~ 50 Hz	10 A	2.2 m, with plug

14.3 Ambient conditions



Condensate may form in the appliance in tropical conditions and this has to be taken into account in the planning.

Climate class	Minimum	Maximum
SN	+10 °C:	+32 °C:
N	+16 °C:	+32 °C:
ST	+16 °C:	+38 °C:
T	+16 °C:	+43 °C:





14.4 Niche ventilation

For trouble-free heat dissipation of the appliance, an air duct must be provided whose width is no greater than the width of the unit with an unobstructed passage of at least 200 cm² from the air inlet in the plinth area **A** to the air outlet at the back **B** and at the front **C**.

If there are wall units the ventilation gap **x** must be selected according to the following table.

If, for design reasons, a smaller ventilation gap **y** is preferred for the front-facing air outlet at the top, then ventilation at the top must be possible across several unit widths. The dimensions for **y** are given in the following table.

If refrigerators/freezers are installed side by side, the cross-section requirements for the air duct are doubled (**width b**).

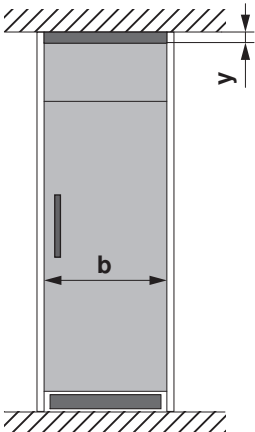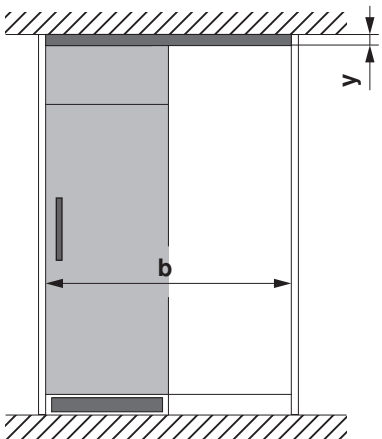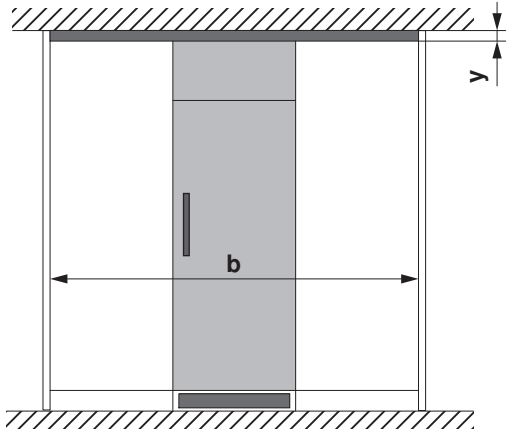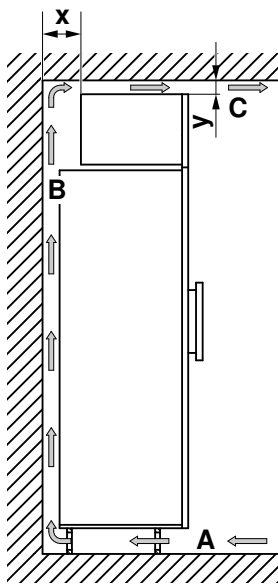Dimensions per appliance	b (mm)	y (mm)	x (mm)	
	550–568	≥40	≥50	
	1100–1168	≥30	≥100	
	≥1650	≥20		
				

14.5 Refrigerators


CombiCooler V6000 Supreme (51096) (fully integrated)

Gross weight: 212 kg. Maximum permissible weight of door panel: 23 kg (top) / 11 kg (bottom).

Water connection: Length 2.5 m, a water outlet and Aquastop does not have to be provided.

Fixed water connection : 3/4" internal thread, the water connection must be accessible at all times.

Electrical connection cable: 2.2 m.

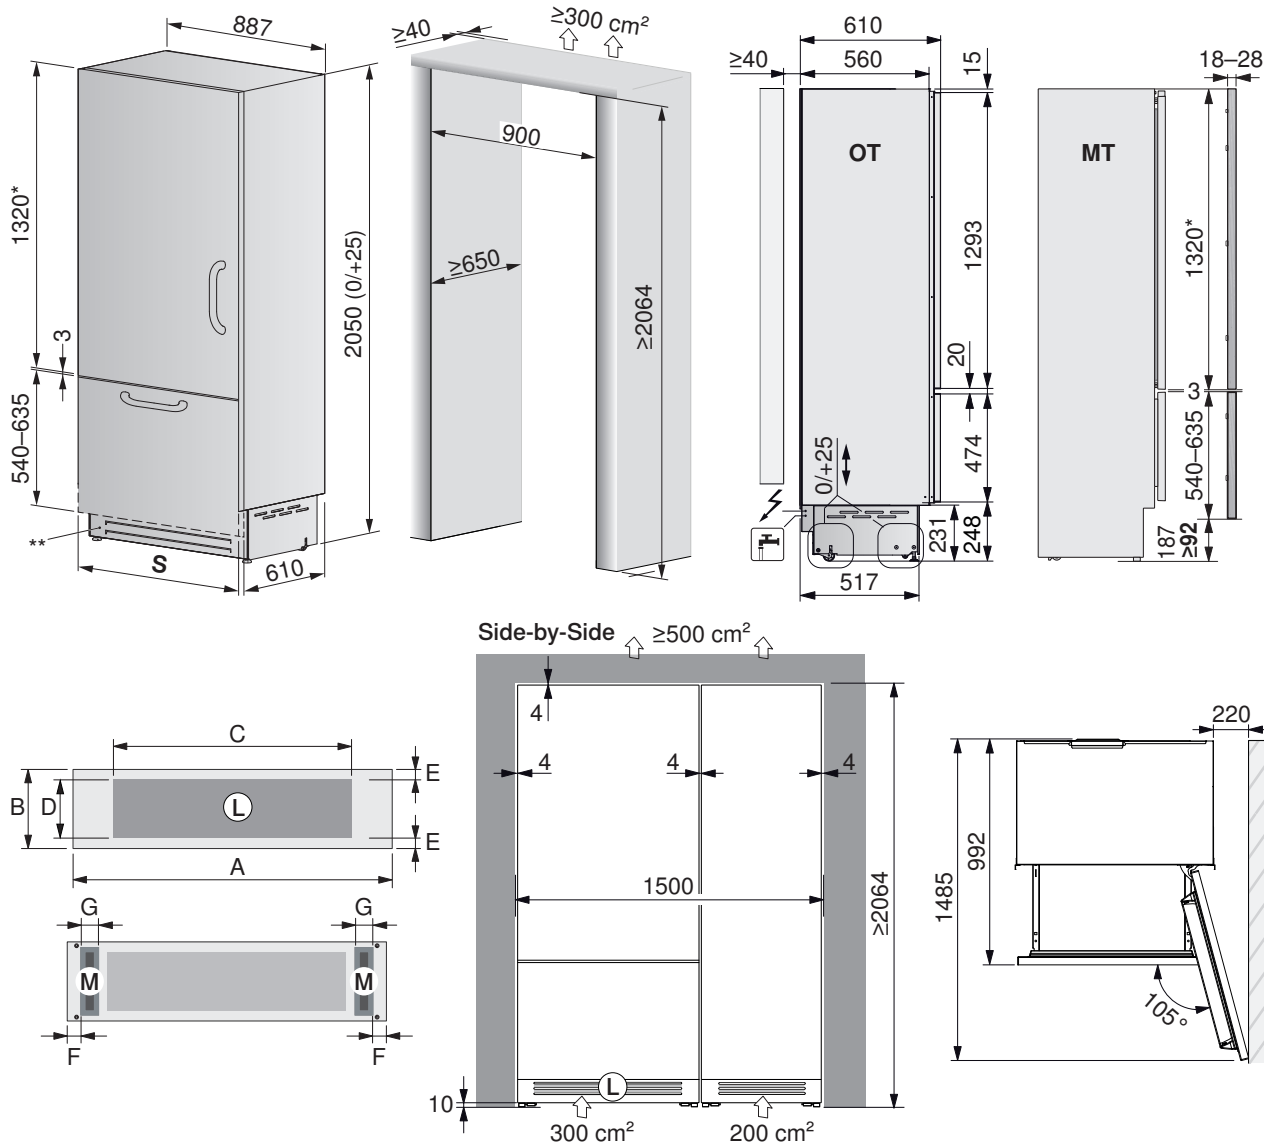

* = For niche height >2064, the height of door panel must be adjusted.

** = Chrome front grille can be replaced by kitchen cabinet front (for dimensions see installation instructions).

S Solo installation: Width of cabinet front 894 mm, dimension of gap 3 mm.

Side-by-side: Width of cabinet front 894 mm, dimension of gap 4 mm.

OT View without door panel, **MT** View with door panel, **L** Air inlet (at least 50% open), **M** Magnet for mounting.

Dimensions for ventilation grille and position of magnet:

A = 894, **B** = 215, **C** = 700, **D** = 200, **E** = approx. 10, **F** = 60, **G** = 15–30.

Installation accessories:

Chrome steel door panel set (incl. chrome designer handle) width: 894, height of fridge compartment: 1320, height of freezer compartment: 581.


Hinge left: Article no. **1090119**, hinge right: Article no. **1087155**.

For side-by-side installation: Lateral plastic connecting angle + lateral plastic cover strip (included in scope of delivery). Intermediate plastic cover strip (accessory available for order: article no. **1101167**).

Cooler V6000 Supreme (51098) (fully integrated)

Gross weight: 189 kg. Maximum permissible weight of door panel: 34 kg.

Electrical connection cable: 2.2 m.

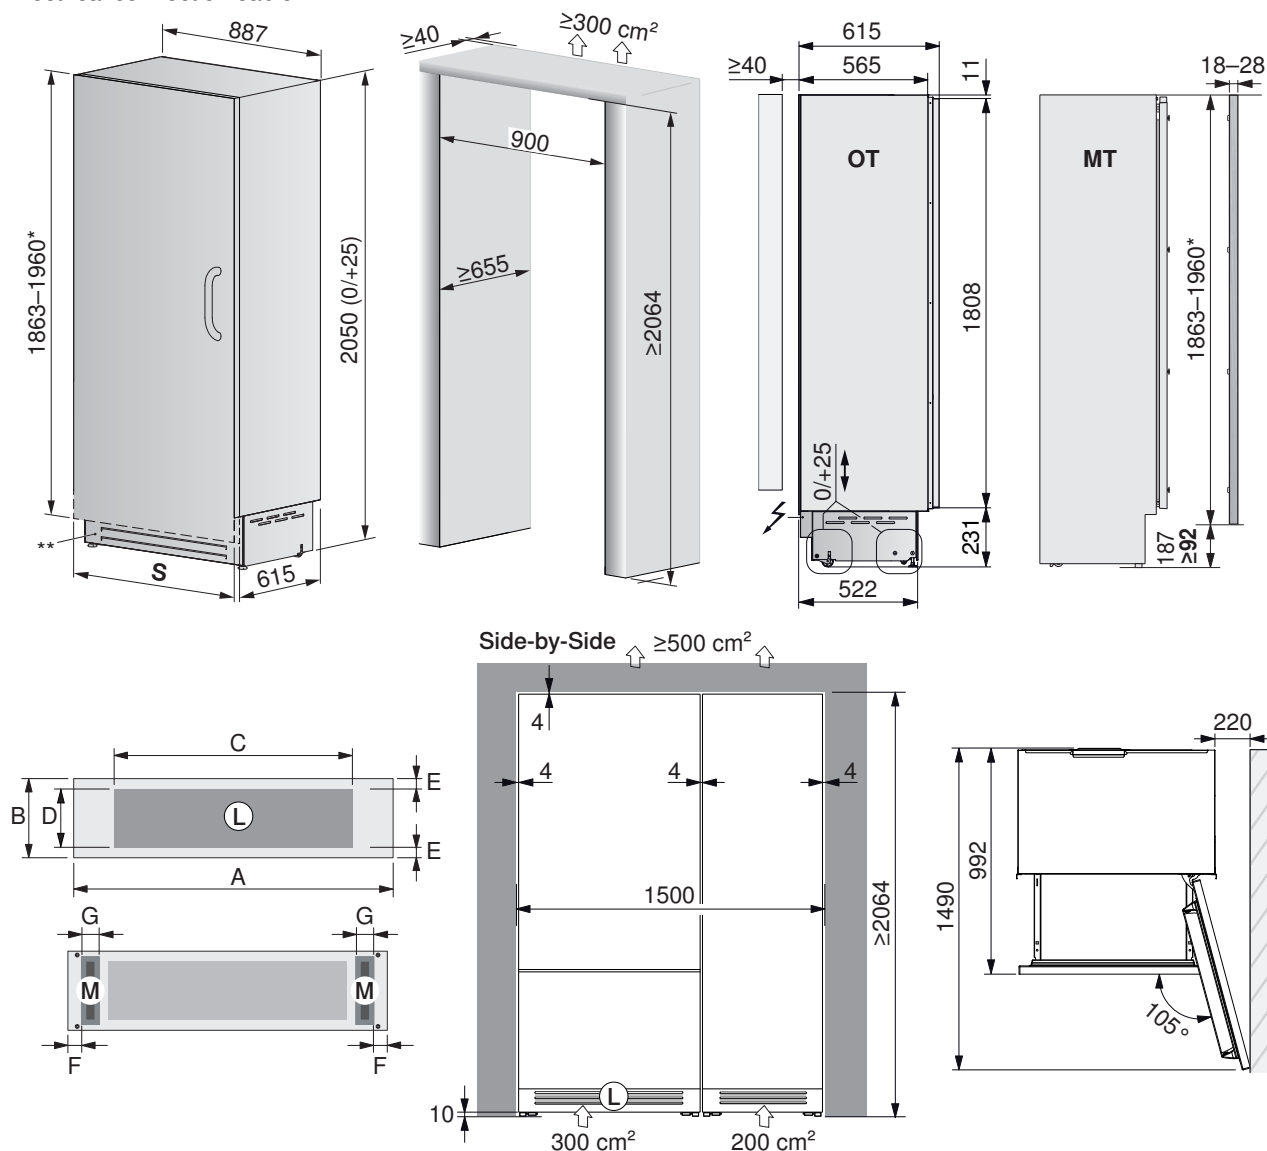

* = For niche height >2064, drill holes in and height of door panel must be adjusted (see installation instructions).

** = Chrome front grille can be replaced by kitchen cabinet front (for dimensions see installation instructions).

S **Solo installation:** Width of cabinet front 894 mm, dimension of gap 3 mm.

Side-by-side: Width of cabinet front 894 mm, dimension of gap 4 mm.

OT View without door panel, **MT** View with door panel, **L** Air inlet (at least 50% open), **M** Magnet for mounting.

Dimensions for ventilation grille and position of magnet:

A = 894, **B** = 215, **C** = 700, **D** = 200, **E** = approx. 10, **F** = 60, **G** = 15-30.

Installation accessories:

Chrome steel door panel set (incl. chrome designer handle) width: 894, height: 1904.


Hinge left: Article no. **1090120**, hinge right: Article no. **1087157**.

For side-by-side installation: Lateral plastic connecting angle + lateral plastic cover strip (included in scope of delivery).


Intermediate plastic cover strip (accessory available for order: article no. **1101167**).

14.6 Winecoolers


WineCooler V4000 90 (51102)

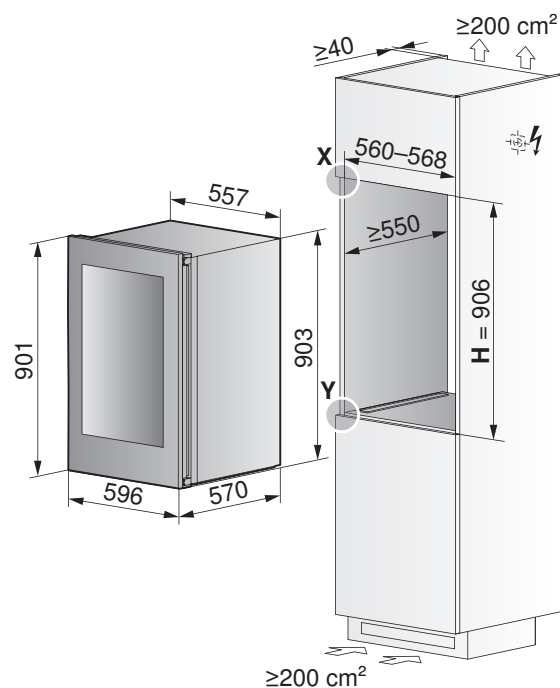

Detail X



Detail Y




Model	Installation type	Niche height H	Overlap U1
51102	EURO 60	$906^{+2/0}$	3.5 mm

WineCooler V6000 Supreme (51097) (integrable)

Gross weight: 153 kg. Maximum permissible weight of door panel: 34 kg.

Electrical connection cable: 2.2 m.

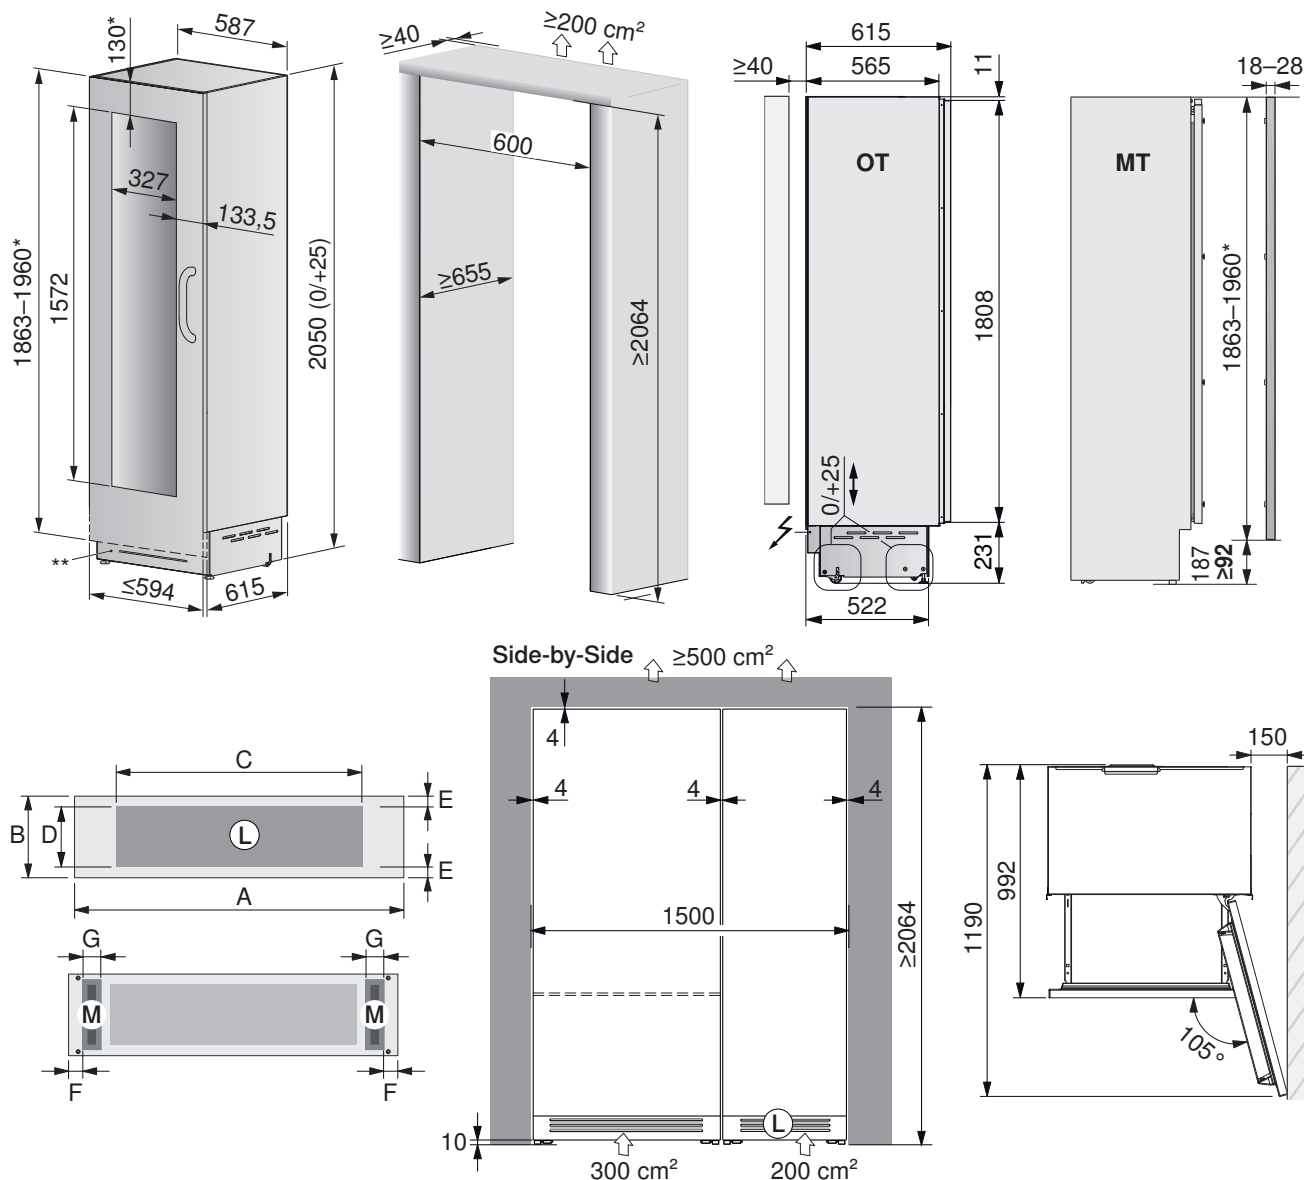

* = For niche height >2064, drill holes in and height of door panel must be adjusted (see installation instructions).

** = Chrome front grille can be replaced by kitchen cabinet front (for dimensions see installation instructions).

OT View without door panel, **MT** View with door panel, **L** Air inlet (at least 50% open), **M** Magnet for mounting.

Dimensions for ventilation grille and position of magnet:

A = 594, **B** = 215, **C** = 400, **D** = 200, **E** = approx. 10, **F** = 60, **G** = 15-30.

Installation accessories: Chrome steel door panel set (incl. chrome designer handle) width: 594, height: 1904.

Hinge left: Article no. **1090121**, hinge right: Article no. **1087156**.

For side-by-side installation: Lateral plastic connecting angle + lateral plastic cover strip (included in scope of delivery). Intermediate plastic cover strip (accessory available for order: article no. **1101167**).

Model	Installation type	Niche height H
51097	EURO 60	≥2064

14.7 Freezers


Freezer V6000 Supreme (51099) (fully integrated)

Gross weight: 153 kg. Maximum permissible weight of door panel: 34 kg.

Water connection: Length 2.5 m, a water outlet and Aquastop does not have to be provided.

Fixed water connection : 3/4" internal thread, the water connection must be accessible at all times.

Electrical connection cable: 2.2 m.

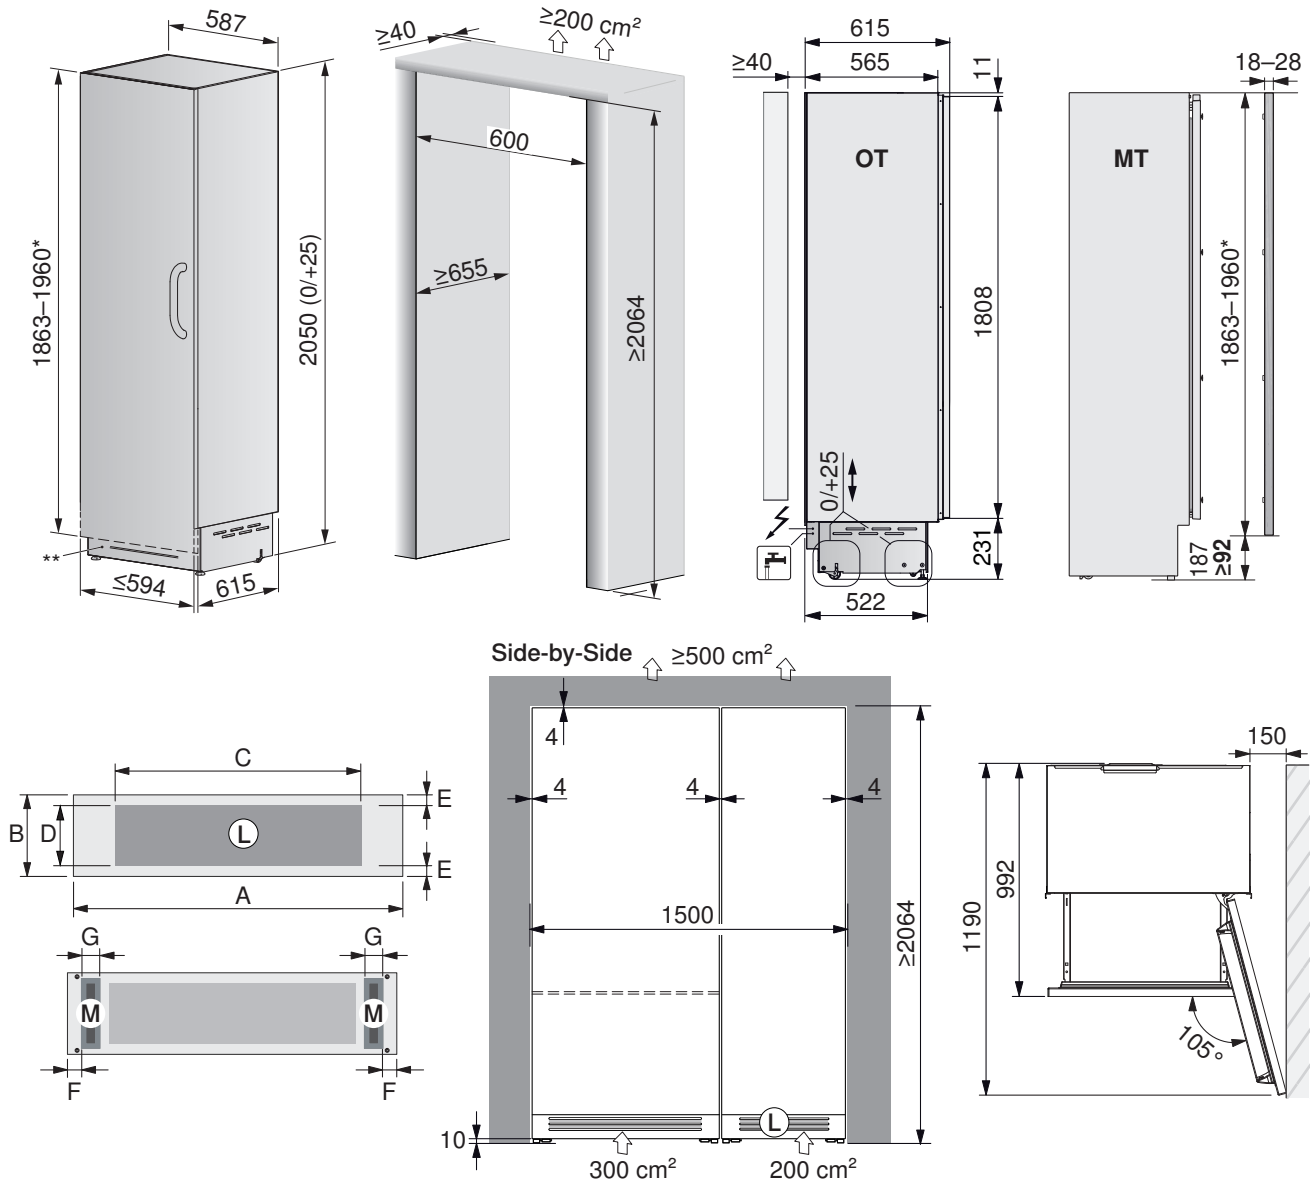

* = For niche height >2064, drill holes in and height of door panel must be adjusted (see installation instructions).

** = Chrome front grille can be replaced by kitchen cabinet front (for dimensions see installation instructions).

OT View without door panel, **MT** View with door panel, **L** Air inlet (at least 50% open), **M** Magnet for mounting.

Dimensions for ventilation grille and position of magnet:

A = 594, **B** = 215, **C** = 400, **D** = 200, **E** = approx. 10, **F** = 60, **G** = 15–30.

Installation accessories: Chrome steel door panel set (incl. chrome designer handle) width: 594, height: 1904.

Hinge left: Article no. **1090126**, hinge right: Article no. **1090125**.

For side-by-side installation: Lateral plastic connecting angle + lateral plastic cover strip (included in scope of delivery). Intermediate plastic cover strip (accessory available for order: article no. **1101167**).

15 Accessories

15.1 Ovens / steam cookers / microwave ovens / coffee machines / vacuum drawers / warming drawers / system drawers


Designer handle for CombiSteamer V6000 45L Grand

Colour	Length	Art. no.
Black	760 mm	1190681
Platinum		1190682
Pearl		1190683

Compensation elements

Ventilation grille


- Ventilation grilles are needed when glass ceramic hobs are installed over ovens.
- For installation above the control panel, see installation instructions J40254.



Niche width 60 cm		
Designation	Appliance height	Article no.
White	60 cm	H63161
Nero	60 cm	H63163
ChromeClass	60 cm	H63256

Adapter frame

- For installation, see installation instructions J73.050.
- Installation below the appliance

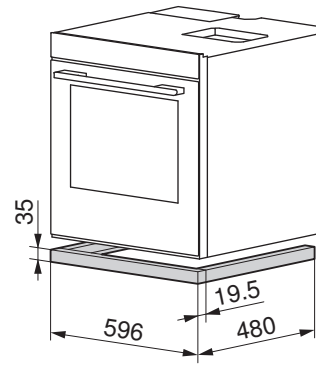


Niche width 60 cm		
Designation	Appliance height	Article no.
White	38.1/60 cm	K38137
Nero	38.1/60 cm	K38136
ChromeClass	38.1/60 cm	K48135
Black glass	38.1/60 cm	K38134
AluClass	38.1/60 cm	K38133

Angle set for combination possibilities

- For installation, see installation instructions J21021050
- ▶ In the niche mount to the wood left and right.
- ▶ The appliance is placed on the mounting angles and pushed into the niche.

Art. no. K50572, construction type EURO

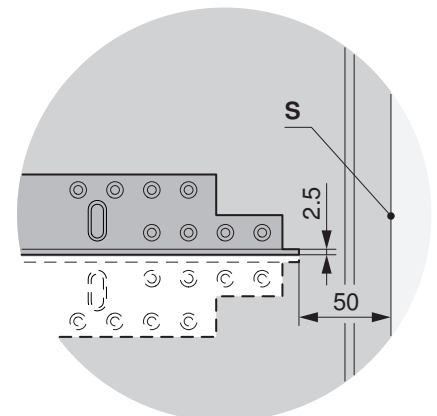


S Unit front

Trim kit (edge protection)

- For installation, see installation instructions:
1044771, 1044772, 1075859.


Art. no. 1056472 trim kit (edge protection)
only needs to be ordered once.

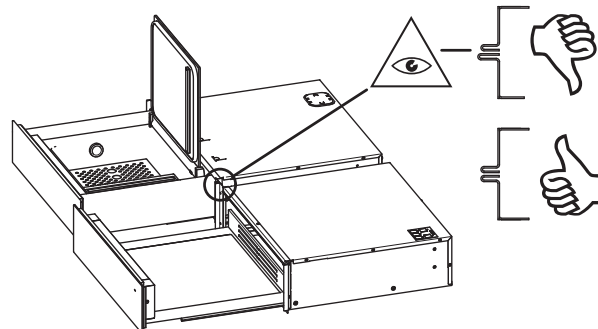

Anti-tip set for VacuDrawer V6000

- For installation, see installation instructions: **1044772**.

Art. no. 1016692 Anti-tip set
 only needs to be ordered once.

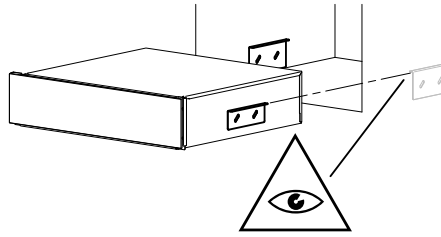

Design cover

The design cover covers the intermediate base for EURO niches and is for a combined installation of two appliances e.g. oven **1** and combi-steam cooker **2**. The cover is dimensioned for panel overlapping of 4 mm.

- For installation, see installation instructions J340050
- Depending on the thickness of the intermediate base **b**, two variants (nero) of the design cover **A** are available:

Art. no. K37158 (**b** = 16 mm / **a** = 10.5 mm)


Art. no. K37159 (**b** = 19 mm / **a** = 13.5 mm)

Aesthetic profile

Assembly kit with aesthetic profile for installing Miwell next to another appliance.

- For installation, see installation instructions 1009019

Art. no. 1009179

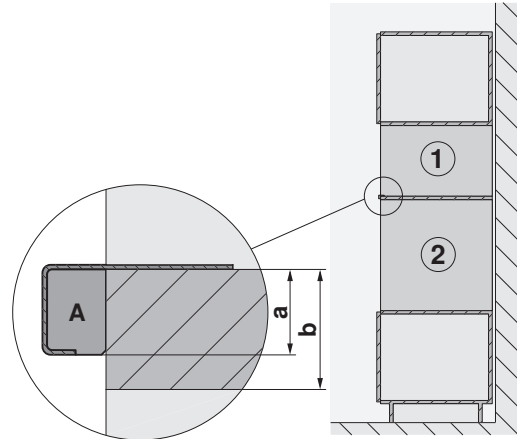

Drain hose

5 m drain hose for CombiSteamer V6000 45F with fixed water connection.

Art. no. 1012933

15.2 Hobs and gas hobs

Ventilation protective plate set for installation below induction hobs		Article no.	Installation instructions
Niche width 600 mm with seal Niche width 825 mm with seal Niche width 900 mm with seal	For all other induction appliances	H61083 H61084 H61085	J40248
Niche width 600 mm without seal Niche width 825 mm without seal Niche width 900 mm without seal	- for induction CookTop V4000 I904 CookTop V4000 I904	H61087 H61088 H61089	
Ventilation grille, height 35 mm for built-under short ovens		Article no.	
Type of construction 60-600			
White Nero ChromeClass ChromeClass (TouchClean)		H63161 H63163 H63165 H63256	J40254
Type of construction 60-450			
Nero ChromeClass ChromeClass (TouchClean)		H60039 H60041 H60053	J40250
Type of construction 60-381			
Nero ChromeClass ChromeClass (TouchClean)		H60033 H60035 H60049	J40252
Angle set for flush installation with straight stone cut		Article no.	Installation instructions
Hob size 30 Hob size 40 Hob size 60 Hob size 70 Hob size 80 Hob size 90 Hob size 90 Panorama		H63770 H63771 H63772 H63773 H63774 H63775 H62568	J004133
Set for flush installation		Article no.	Installation instructions
Sealing strip set		H63283	J004133
Spacer set		H60330	
Adjusting brace set for installation in glass worktops		Article no.	Installation instructions
Adjusting brace set		H62510	J41699

Foam profile (for retrofitting existing ventilation plates)	Article no.	Installation instructions
length: 520 mm Length: 570 mm Length: 780 mm Length: 870 mm	H63651 H63652 H63653 H63654	-



Intermediate support sets for combined installation	Article no.	Installation instructions
Stainless steel intermediate support for the surface-mounted combination of several hobs	1014361	1013773
Black intermediate support for the surface-mounted combination of several hobs	1019199	
Side strips for combination installation with Teppan Yaki and hob hood	1028587	
Intermediate support (2× contained in set) for the flush-mounted combination of several hobs	H63789	1014381

Special gas hobs	Article no.	Installation instructions
Gas deflector for DSMS combination and gas hob	1031218	-
Sealing ring for gas connection, flat	1030096	-
Installation accessories for hobs		Article no.
Instant adhesive for installation of the steel angle (50 ml)		B11657
Straight mixing nozzle		B11656
Applicator gun		-
Sealing strip set (tape and spacer material)		H63283
Sealing tape 10 × 3 × 2800		86392887
Sealing tape 5 × 1.5 × 2552		H62377
Spacer set		H60330
Black silicone FA880 (310 ml)		B11555
Anthracite silicone FA880 (310 ml)		B11556
White silicone FA880 (310 ml)		1031313
Stone grey silicone FA880 (310 ml)		1031314
Marble smoothing agent AA320 (1000 ml)		B11557
Fugenboy (silicone finishing tool)		B75158

Nozzle sets for gas hobs in the overview (see page 50)


15.3 Range hoods



Technical information on the range hoods can be found in document «TechInfo for range hoods» under J32836 (EN), 1007182 (IT), 1008408 (DE), 1008409 (FR).

Protective plate for side walls


The protective plates for the side walls are needed to protect the sides of the wall unit from grease and moisture.

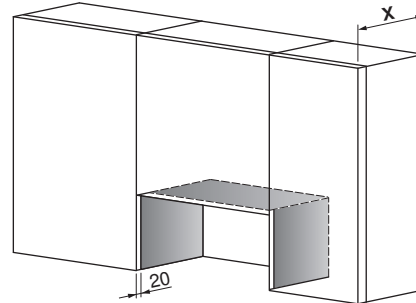

Designation	Dimensions (height × depth)	Wall unit depth x	Colour	Article no.
Protective plate for side walls	235 × 310 mm	330 mm	White	K26092
Protective plate for side walls	235 × 310 mm	330 mm	Nero	K26093
Protective plate for side walls	235 × 310 mm	330 mm	ChromeClass	K26094
Protective plate for side walls	235 × 330 mm	350 mm	White	H42792
Protective plate for side walls	235 × 330 mm	350 mm	Nero	H42791
Protective plate for side walls	235 × 330 mm	350 mm	ChromeClass	H42790
Protective plate for side walls	235 × 350 mm	370 mm	White	H42795
Protective plate for side walls	235 × 350 mm	370 mm	Nero	H42794
Protective plate for side walls	235 × 350 mm	370 mm	ChromeClass	H42793

Fastening elements

Pipe clip with thread




Description

For mounting the helically wound pipe
2-part set with sound insulation insert, incl. screws and nuts
Galvanized steel, thread M8

Art. no.
H42050

d1
ø150 mm

Double-threaded pin M8, galvanized




Description

For mounting the pipe clip in the concrete wall
Length 40 mm

Art. no.
H42057

Quick-locking hose clamp




Art. no.
33121304
33121336

ø110–130 mm
ø150 mm

Connecting nipples / connecting pipes

Connecting nipple


**Description**

Sendzimir galvanized sheet steel
L = 80 mm

Art. no.
H42031

d1
ø150 mm

Connecting pipe

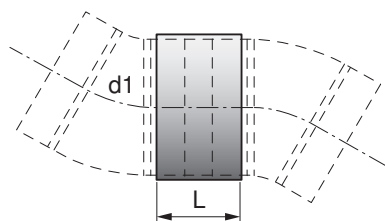**Description**


Sendzimir galvanized sheet steel
L = 90 mm

Art. no.
H42032
H42033

d1
ø125 mm
ø150 mm

Elbows

Elbow 90°

**Description**


Elbow, pressed, R = d1
Use with flexible and rigid pipes
Sendzimir galvanized sheet steel

Art. no.
H42034
H42036

d1
ø125 mm
ø150 mm

Reducers

Reducer

**Description**


Pressed version, L = 22 mm
Sendzimir galvanized sheet steel

Art. no.
H42040

d1
ø150–125 mm

Pipe end pieces

Pipe end piece

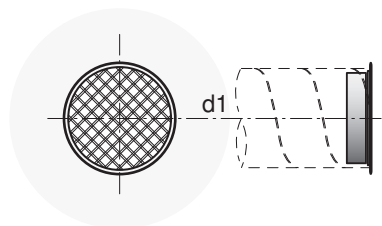


Description

Connection with grille
Sendzimir galvanized sheet steel

Art. no.	d1
H42048	ø150 mm

Weather protection grilles

Weather protection grille made from plastic

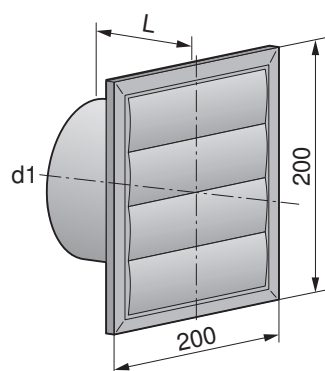


Description

Weather protection grille without a non-return flap valve, square with connection piece

weatherproof, L = 40 mm

Art. no.	d1
H42080	ø150 mm, white

Weather protection grille



Description


Weather protection grille without a non-return flap valve, round, pressed, made from aluminium

With fly screen and connection piece, L = 45 mm

Art. no.	d1
H42064	ø150 mm

Wall pipes

Telescopic wall pipe with non-return flap valve

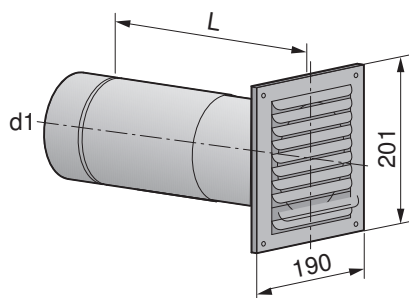

Description

3-part set, L = Wall thickness 300–460 mm


Sendzimir galvanized sheet steel

Grille made from aluminium; can be painted

Art. no.	d1
H42065	ø125 mm
H42066	ø150 mm

Flaps

Non-return flap valve with sealing lip




Description

Made from robust sheet steel
For flexible and rigid pipes, $L = 80 \text{ mm}$

Art. no.	d1
H42061	ø125 mm
H42062	ø150 mm

Hoses

Aluminium hose, semi-flexible




Description

Round Aluflex, semi-flexible
Dimensionally stable, flame resistant
1 à 3 m

Art. no.	d1
H42051	ø125 mm
H42052	ø150 mm
H40168	ø160 mm

Aluminium hose, highly flexible




Description

Round Aluflex, highly flexible
Internal bending radius 30–60 mm
Dimensionally stable, flame resistant

Art. no.	d1
H42053	ø125 mm, 1 à 10 m
16955803	ø150 mm, 1 à 15 m

Noise insulation, aluminium

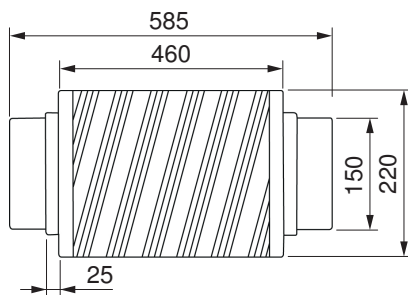


Description

Noise insulation made of aluminium for ø150 mm pipe dimension.
Noise reduction of up to 22 dB.

Art. no.	
1030591	ø150 mm

Fire damper / Shut-off device

Round fire damper

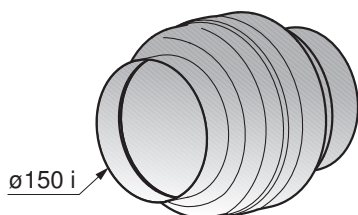

Description

Round fire damper, certified by VKF (Swiss Association of Cantonal Fire Insurance Companies), trigger at 70°C, connection to plastic pipe possible, can be installed horizontally or vertically


Art. no.	
1157473	ø150 mm

Flat channel systems made of plastic, fire protection class RF 3



Accessory parts made of non-fireproof plastic.

Flat channel

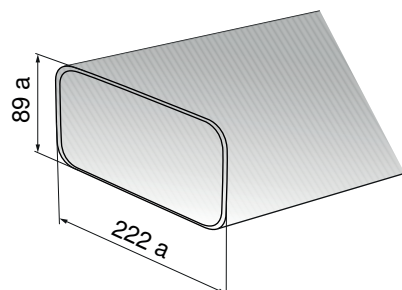

Description


Ventilation duct without sleeve

Art. no.

1012780

L = 1000 mm

Channel connector



Description


For straight ventilation pipes

Art. no.

1012781

L = 80 mm

Elbow 15°, horizontal

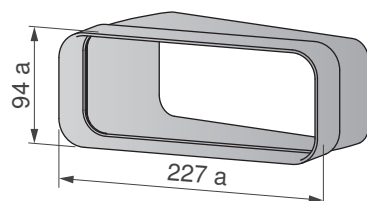

Description


Elbow 15°, horizontal for flat channel

Art. no.

1157479

L = 138 mm

Transition piece for flat channel



Description


Formed sleeve for direct transition from flat to round

Fluidically optimized

Art. no.

1012782

Diverter piece on flat channel 90°

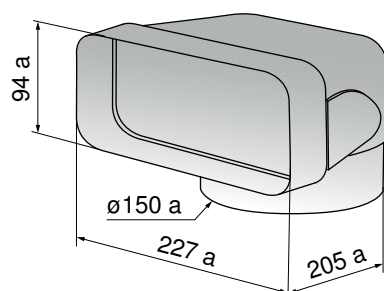


Description

For direct hood connection with air guides and formed sleeve at one end

Art. no.


1012783

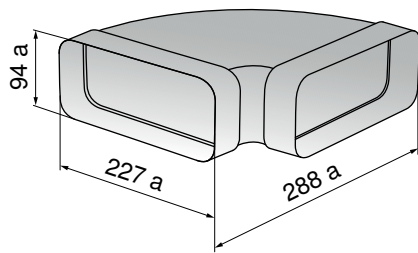Elbow 90°, horizontal**Description**

With air guides and formed sleeve at both ends

Art. no.


1012784

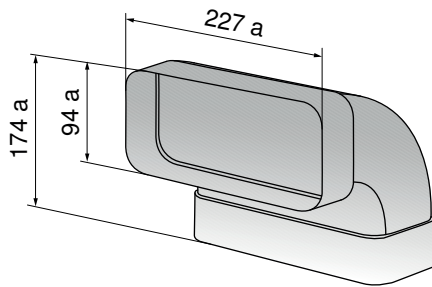Elbow 90°, vertical**Description**

With air guides and formed sleeve at both ends

Art. no.

1012785

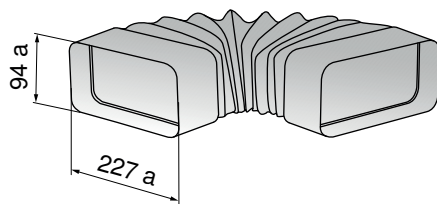Flexible elbow, flat**Description**


For bends and turns up to 90°

Adapter, flexible, angular to angular, with formed sleeve

Art. no.

1012786

L = 240–600 mm

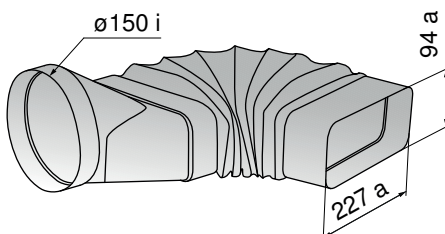Flexible elbow, round onto flat**Description**


For bends and turns up to 90°

Adapter, flexible, round to angular, with formed sleeve

Art. no.

1012787

L = 160–550 mm

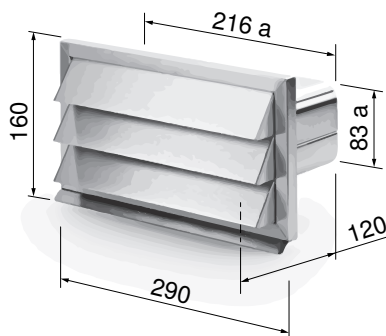Weather protection grille for plastic flat channel**Description**

Ventilation grille for plastic flat channel, ChromeClass with non-return flap valve. Compatible with flat channel art. no. 1012780

Art. no.

1030590


290 × 160 mm

Flat channel systems made of metal, fire protection class RF 1



Accessory parts made of fireproof metal

Flat channel

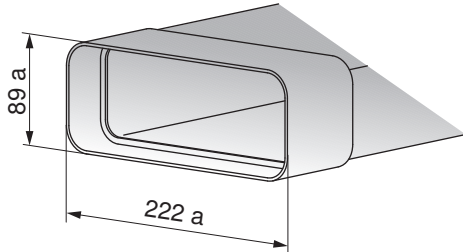

Description


Flat channel with seal

Art. no.

1046627

L = 500 mm

Flat channel

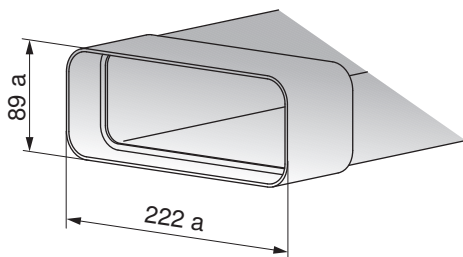

Description


Flat channel with seal

Art. no.

1046628

L = 1000 mm

Reinforcing rib for embedding in concrete

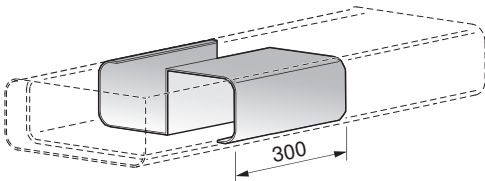

Description

Reinforcing rib for embedding in concrete (tread load of up to 100 kg)

1× required for use in flat channel (L=500mm) art. no. 1046627


2× required for use in flat channel(L=1000mm) art. no. 1046628

Art. no.

1077495

L = 300 mm

Flat channel, flexible

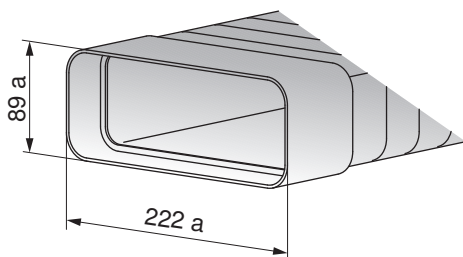

Description


Flat channel, flexible, with seal

Art. no.

1046629

L = 500 mm

Flat channel, flexible

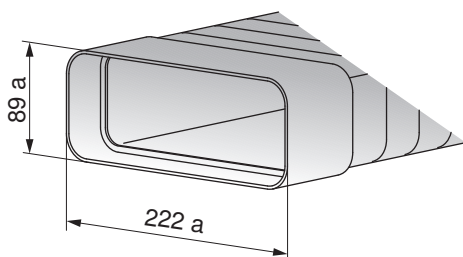

Description


Flat channel, flexible, with seal

Art. no.

1046635

L = 1000 mm

Channel connector

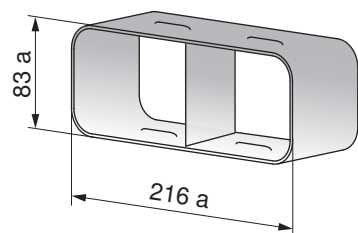

Description


For straight flat channels

Art. no.

1046636

L = 100 mm

Diverter piece on flat channel 90°

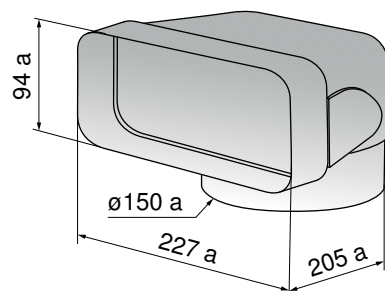


Description

For direct hood connection with air guides and formed sleeve at one end

Art. no.

1046638

Flat elbow connector

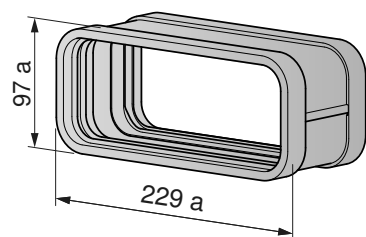

Description


For connecting two flat channel elbows, with two pre-assembled profiled seals.
(Not suitable for connecting flat channel pipes.)

Art. no.

1188102

Length = 90 mm

Elbow 90°, horizontal

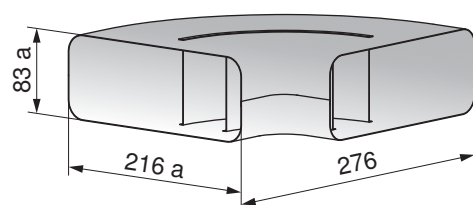


Description

Elbow with air guides

Art. no.

1046639

Elbow 90°, vertical

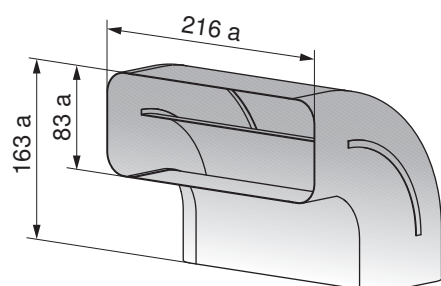


Description

Elbow with air guides

Art. no.

1046643

Transition piece for flat channel

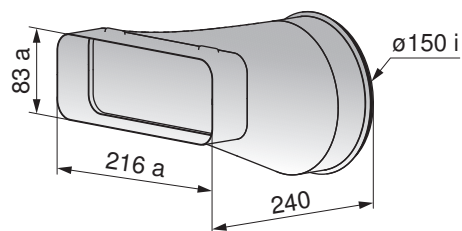


Description

For direct transition from flat to round, fluidically optimized

Art. no.

1046644

Pipe connection




Art. no.

1046646

d = 150 mm


Offsetting end piece on base motor

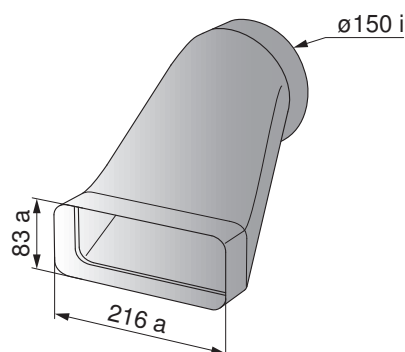

Art. no.

1046649

Pipe set for hob hoods

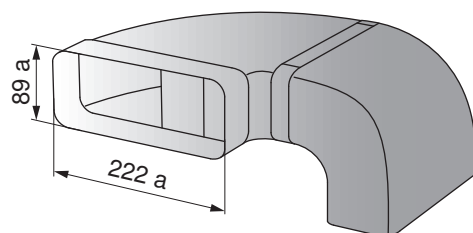


Art. no.

1046650

Flat channels, standard metal

Flat channel



Description

Exhaust ducting system with very low installation height of 82 mm

Sendzimir galvanized sheet steel

Corresponds to nominal diameter ø150 mm

Art. no.


H42068

L = 1000 mm

H42069

L = 600 mm

Reinforced flat channel

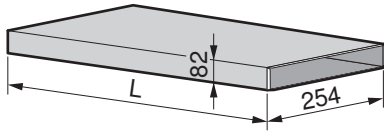

Description

Exhaust ducting system with very low installation height of 82 mm
Sendzimir galvanized sheet steel
With reinforcement for concreting in
Corresponds to nominal diameter $\varnothing 150$ mm

Art. no.


H42085

L = 600 mm

H42086

L = 1000 mm

Telescopic flat channel

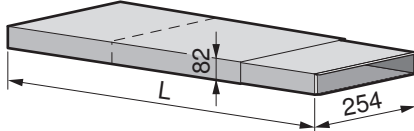

Description


Exhaust ducting system with very low installation height of 82 mm
Sendzimir galvanized sheet steel
Corresponds to nominal diameter $\varnothing 150$ mm

Art. no.

H42070

L = 275–535 mm

Reinforcing rib for flat channel

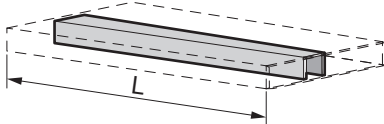

Description

For concreting in flat channel

Art. no.


H42071

L = 600 mm

H42072

L = 1000 mm


Mounting bracket for flat channel

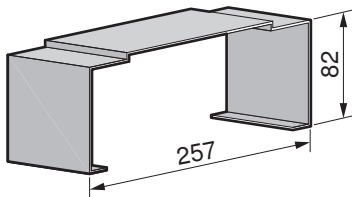

Art. no.

H42073


Elbow 90°, vertical, for flat channel

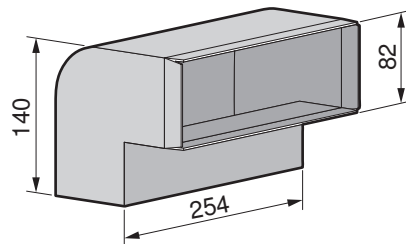

Art. no.

H42074


Elbow 45°, vertical, for flat channel

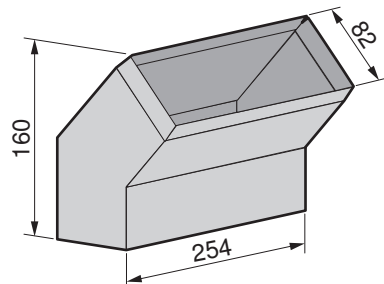

Art. no.


H42075

Elbow 90°, horizontal, for flat channel

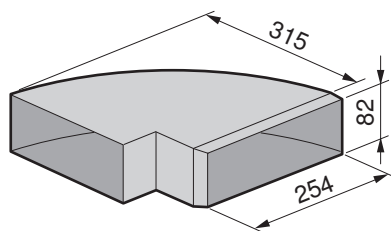


Art. no.
H42076

Elbow 45°, horizontal, for flat channel



Art. no.
H42077

Transition piece for flat channel

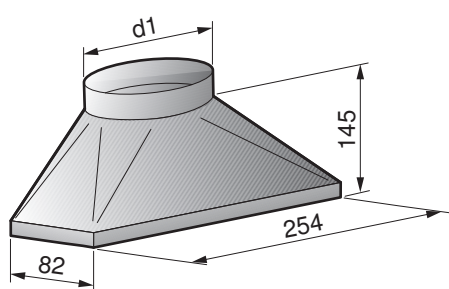


Description

For transition from round to flat

Art. no.
H42078

d1
ø150 mm


Diverter piece on flat channel

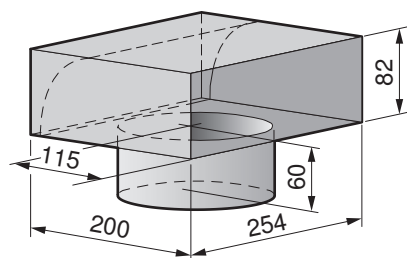

Art. no.
H42087
H42079

Connection ø125 mm
 Connection ø150 mm

Flat channel wall box

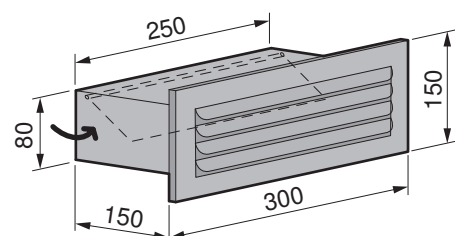


Description

With non-return flap valve and weather protection grille

Art. no.
H42054

Sealing tape

Aluminium tape



Description

Fabric-reinforced tape, with protective film, 50 mm × 50 m roll

Art. no.

H42067

15.4 Dishwashers

AdoraDish

Mirror glass fronts (option)

Integrated	Width	Height	Depth	Article no.
Decor set 60 standard mirror glass	596 mm	632 mm	20 mm	W83526
Decor set 60 extra height mirror glass	596 mm	697 mm	20 mm	W83527

Diverse sets

Set	Article no.	Remarks
Conversion kit for slide plate	W83583	In place of the plinth runners, for installation on a plinth or for tall unit.
Compensator set, black	W82043	Additional order for «mirror glass» appliances. The set can also be used for «ChromeClass» appliances.
Plinth runner	W82930	For height compensation in a niche
Work surface protection	W70163	Protection against escaping moisture
CS set of long hoses V6000 / V4000B	1032108	Conversion to 3 m Aquastop and 3 m drain hose*
CS set of long hoses V2000 / V4000	1091481	Conversion to 3 m Aquastop and 3 m drain hose*
CS set containing door hinge brake	1011228	For very heavy decor panels for appliances with door opener
Set of strong tension springs for standard appliances	W84603	For heavier decor panels; maximum weight (see page 91)
Set of strong tension springs for extra height appliances	W84604	For heavier decor panels; maximum weight (see page 92)



* Conversion must be carried out by qualified personnel.

15.5 Refrigerators

Designation	Article no.	Remarks
Supplementary kit 60 cm (filler strip)		
KPRi, KPRTi	H71756	Length 1780 mm
Installation kit for stone cladding		
Adapter profile KWUCSL60	1062627	Height ≥ 30 mm
Assembly set with filler strip CombiCooler V4000 178NI (51108), CombiCooler V4000 (51086/51087)	1066699 (VZKT 10182022)	Length 1780 mm
Fixing plate for handleless fronts For use with all refrigerators, except for V6000 Supreme, 51076–51078 and 51089–51092.	H73409	-
Assembly set made of metal for fastening door panel For heavy fronts, the metal assembly set can be ordered in place of the plastic angle bracket supplied.	1171133	For all refrigerators with mains cable length of 2.2 m, excluding WineCooler
Installation accessories for		
CombiCooler V6000 Supreme (51096):		
Chrome steel door panel set (incl. chrome designer handle), hinge right	1087155	Width 894 mm, height of fridge compartment 1320 mm, height of freezer compartment 581 mm, thickness 20 mm
Chrome steel door panel set (incl. chrome designer handle), hinge left	1090119	
Cooler V6000 Supreme (51098):		
Chrome steel door panel set (incl. chrome designer handle), hinge right	1087157	Width 894 mm, height 1904 mm, thickness 20 mm
Chrome steel door panel set (incl. chrome designer handle), hinge left	1090120	
WineCooler V6000 Supreme (51097):		
Chrome steel door panel set (incl. chrome designer handle), hinge right	1087156	Width 594 mm, height 1904 mm, thickness 20 mm
Chrome steel door panel set (incl. chrome designer handle), hinge left	1090121	
Freezer V6000 Supreme (51099):		
Chrome steel door panel set (incl. chrome designer handle), hinge right	1090125	Width 594 mm, height 1904 mm, thickness 20 mm
Chrome steel door panel set (incl. chrome designer handle), hinge left	1090126	
For all V6000 Supreme appliances:		
Intermediate plastic cover strip for side-by-side installation	1101167	-
Long chrome designer handle, horizontal (M5 × 55 mm screws supplied): Door panel thickness 18–25 mm, with washer 18–22 mm.	1084381	Length 760 mm, height 48 mm
Extra-long chrome designer handle, vertical (M5 × 55 mm screws supplied): Door panel thickness 18–25 mm, with washer 18–22 mm.	1084417	Length 1060 mm, height 48 mm

16 V-ZUG-Home

16.1 Internet access



Internet access is required for use of V-ZUG-Home.

16.2 Scope of delivery

For appliances with V-ZUG-Home, the V-ZUG-Home module is integrated in the appliance and ready for operation. Models with a V-ZUG-Home module can be connected to the home network via WLAN.

Type of appliance	Model number	Connection type
Ovens	21043, 21045, 21047–21050, 21055, 21057–21059, 21067, 21068, 21070, 21073	WLAN
Steamers	23025, 23026, 23028, 23030–23033, 23036, 23038, 23043, 23045, 23049	WLAN
Dishwashers	41108, 41118, 41121	WLAN
Induction hobs	31132, 31134	WLAN

16.3 Connecting to the home network

WLAN connection



Establishing a connection between an appliance and a wireless network is described in the operating instructions for «V-ZUG-Home». These can be found at home.vzug.com/ch/en/self-service/.



Index

A

Accessories	108
Compensation elements for combination possibilities	109
Design cover	110
Drain hose	110
for range hoods	113
for refrigerators	125
Gas hobs	112
Installation for hobs	112
Adapter frame	109
Adjusting brace set	111
Angle set	111
Angle set for combination possibilities	109

B

Built-in range hoods	84
----------------------------	----

C

Coffee machines	
Accessories	108
Combination possibilities	
Oven	27
Steamers	27
Compensation elements	
Adapter frame	109
Angle set for combination possibilities	109
Design cover	110
Ventilation grille	108
Cookers	17

D

Design cover	110
Dishwashers	
Plumbing-in data	88
Dishwashers with heat pump	95
Electrical connection data	97
Plumbing-in data	97

E

Electrical connection data	
Dishwashers Adora	87
Induction hobs	61
Mini ovens	17
Steamers	12
Warming and system drawers	19
Electrical connections	
Fault currents	5
General operating conditions	5
Position	8
Residual current devices (RCD)	5
Electrical connections and installation dimensions	5

F

Fault currents	5
Fire damper / Shut-off device	116
Flat channel systems made of metal	68, 119
Flat channel systems made of plastic	67, 117
Frequency stability	5
Frequency variation	5

G

Gas hobs	
Electrical connection data	48
General operating conditions	5
Glass ceramic hobs	
Examples for combined installation	57
Induction hobs	29

I

Induction hob	29
Induction hobs	
Electrical connection data	29
Induction wok	29
Installation dimensions	5
EURO	9
Front dimensions	10
Installing	
EURO	9
Intermediate support set	112

M

Microwave ovens	
Accessories	108
Mini ovens	
Electrical connection data	17

N

Notes	129
-------------	-----

O

Operating conditions	
General	5
Ovens	17
Accessories	108

P

Plumbing in	
Dishwashers Adora	87
Positions of electrical connections	8

R

Range hoods	71
Built-in range hoods	84
Connecting nipples	114
Connecting pipes	114
Elbow	114
Fastening elements	113
Flaps	116
Flat channels	121
Hoses	116
Pipe end pieces	115
Reducers	114
Sealing tape	124
TechInfo for range hoods	113
Wall pipes	115
Weather protection grilles	115
Range hoods: Special hoods	71
Refrigerators	101
Residual current devices (RCD)	5

**S**

Sealing strip set	111
Spacer set	111
Special hoods	71
Steam cookers	
Accessories	108
Steamers	12
Electrical connection data	12
Plumbing in	16
Supplementary documents	2
TechInfo for range hoods	113
Symbols used	2
System drawers	19
Accessories	108

T

TechInfo for range hoods	113
--------------------------------	-----

U

Use at altitude	5
Useful links	2

V

Vacuum drawer	19
Vacuum drawers	
Accessories	108
Validity	6
Ventilation grille	108, 111
Ventilation protective plate set	111

W

Warming and system drawers	
Electrical connection data	19
Warming drawers	19
Accessories	108
Winecoolers	105



17 Notes





CONTACT POINT IN AUSTRALIA

Services & Support Australia:

Tel. +61 1300 898 428
service.au@vzug.com

CONTACT IN SWITZERLAND

V-ZUG Ltd
Industriestrasse 66
6302 Zug/Switzerland
www.vzug.com

Service & Support International

Tel. +41 58 767 67 78
service-support@vzug.com

